

GV-POE0810 8-Port Gigabit 130W 802.3at PoE Switch




Packing List

- 1. GV-POE0810 x 1
- 2. Screw x 8
- 3. Rack Mount Kit x 1
- 4. AC Power Cord x 1
- 5. Software CD x 1
- 6. GV-POE0810 Quick Start Guide x 1

Note: If any of these items is found missing or damaged, please contact your local supplier for replacement.

Front Panel

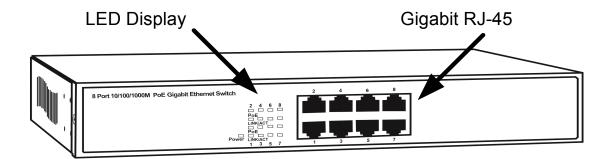




LED	Color/Status	Description	No. of LED
Power	Amber On	Power on	Power
	Off	Power off	
Link / ACT	Green On	Link Up	
	Green Blinking	Data is transmitting or receiving	Port 1~8
	Off	No connection	(10/100/1000 M)
PoE	Amber On	Port is linked to Power Device	
	Off	No Power Device is connected	

LED Indicators on the switch:

Connecting up to 7 GV-IP Cameras and 1 GV-NVR/DVR System

Through twisted pair cables, this switch can be connected to up to 7 GV-IP Cameras and 1 GV-NVR/DVR System. Choose any of the 7 ports from the switch to connect the GV-IP Cameras, and choose 1 port to connect to GV-NVR/DVR System. You can also extend more connections by connecting to other switches.

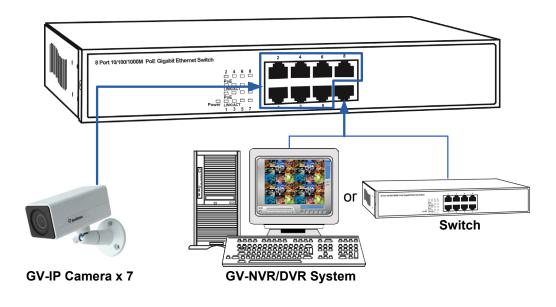

Note: The maximum cable length for RJ-45 Cable is 100 meters.

Specifications

Ports				
Number of Ports		8 ports		
		8-port 10/100/1000BaseTX with RJ-45 Connectors, POE+		
Performance				
MAC Address		8 K		
Buffer Memory		1.37 M bits		
Transmission Method		Store and Forward		
Transmission Media		10/100BaseTX Cat. 5 UTP/STP 1000BaseT Cat. 5e, 6 UTP/STP		
Filtering / Forwarding Rates		10 Mbps port - 14,880 pps 100 Mbps port - 148,800 pps 1000 Mbps port - 1,488,000 pps		
Mechanical Characteristics				
LED Indicators		Per Port: Link/Act PoE Act/Status Power		
Electrical Charact	eristics			
	Input	100 ~ 240 V/AC, 50 ~ 60 Hz		
PoE Power	Output	IEEE 802.3at Compliant Voltage, Per Port Max. 30 W (8 Ports at Full 15.4 W / 4 Ports at Full 30 W)		
Max. Power Consumption		130 W		
General				
Dimensions (H x W x D)		44 x 266 x 161 mm (1.73" x 10.47" x 6.34")		
Weight		1.52 kg (3.35 lb)		
Operating Temperature		0°C ~ 40°C (32°F ~ 104°F)		
Storage Temperature		-20°C ~ 90°C (-4°F ~ 194°F)		
Humidity		10% ~ 90% RH (non-condensing)		
Standards and Re	gulatory			
Standards		IEEE 802.3 10BaseT, IEEE 802.3u 100BaseTX, IEEE 802.ab 1000BaseT IEEE 802.3x Flow Control IEEE 802.3at Power Over Ethernet (PoE+)		
Regulatory		CE, FCC Class A		
Note: Specification		t to change without prior notice		

Note: Specifications are subject to change without prior notice.