
SENTROL

PRODUCT INFORMATION BULLETIN

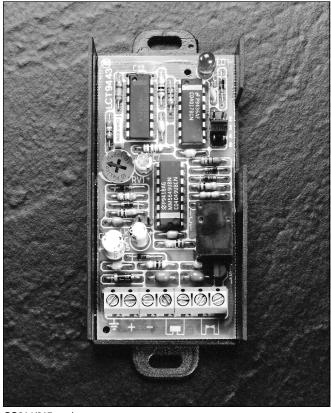

GS614/GS615 GLASSBREAK SHOCK SENSOR ANALYZER

For complete solution in perimeter protection

Model numbers: GS614, GS615

GS614/615 analyzer

- Sensitivity adjustment and pulse count selection
- Up to 20 sensors can be connected to each analyzer
- On board voltage regulation
- LED display

The Sentrol GS614 and GS615 Shock Sensor

Analyzers work in conjunction with the inertia shock sensors GS600, GS610, & GS611. The analyzer is designed to interface between the shock sensor loop and the burglar control panel.

Models GS614 and GS615 provide sensitivity adjustment for the single shock gross attack level and a pulse count feature which detects small shocks and counts them at one second intervals, storing them in digital memory for 30 seconds. This provides a second level of signal processing to eliminate false alarms and increase detection of repeated tampering attacks.

Sentrol GS614 & GS615 Analyzer

Specifications:

Electrical

Operating Voltage	10 –15 VDC
Current Draw	50 mA max, 10 mA min
Maximum loop rating	1 A -12 VDC
Loop Configuration	closed loop

Environmental


Operating Temperature	14°F (-10°C) to +140°F (60°C)
Relative Humidity	90%

Features

Sensitivity Setting	Potentiometer, adj.
Pulse Count Options	GS614 (4), GS615 (9)
Mounting Method	Double-sided tape
Mounting Location	Control panel recommended

GS614 Analyzer

GS615 Analyzer

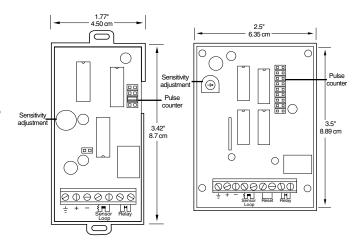

Ordering Information

Description	Model Number
GS614-W	Single zone analyzer
GS615-W	Single zone analyzer with EOL resistor and manual reset



12345 SW Leveton Dr. Tualatin, OR 97062

PH 503.692.4052 **FX** 503.691.7566 www.interlogixinc.com

USA & Canada: 800.547.2556 **Technical Service:** 800.648.7424 **FaxBack:** 800.483.2495 ©2001 Interlogix, Inc.
Interlogix reserves the right to change specifications without notice.
ShatterPro and ShatterPoint are trademarks of Interlogix, Inc.