

VGA to HDMI Converter

MVA-VH01Q

The MVA-VH01Q converts both VGA and stereo signals into HDMI format, allowing video and audio from VGA sources such as computers and DVRs to play on HDTVs.

Features:

- Converts VGA formats to HDMI
- Supports resolution up to 1280x1024
- Audio input allows conversion of audio
- HDCP Pass-through
- 5VDC Power adapter included
- Plug and play operation—no setup necessary




Up to
1280x1024
Resolution

Specifications:

Supported resolutions	640x480; 800x600; 1024x768; 1280x720; 1280x768; 1280x960; 1280x1024
Video input signal	0.5~1Vp-p
DDC input signal	5Vp-p
Vertical frequency	50/60Hz
Video amplifier bandwidth	1.65Gbps/165MHz
Operating temperature	32°~158° F (0°~70° C)
Operating humidity	5%~95% RH (no condensation)
Current draw	1A
Dimensions	3 1/2" x 2 5/8" x 1" (88x68x25.5 mm)
Weight	24-oz (680g)

Sample Application:

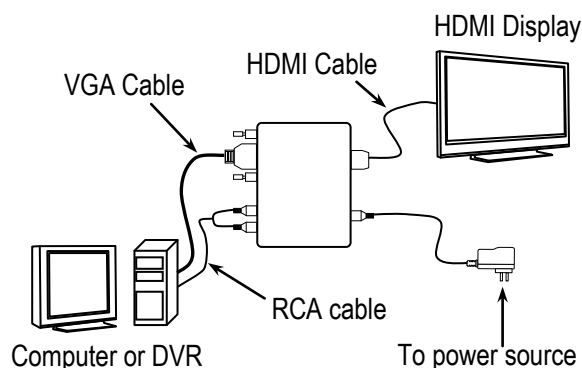

Also Available from SECO-LARM®:

MVE-AH020Q



HDMI over Cat5e/6

MVA-EH01Q



Component to HDMI

MVD0V1501-1Q



VGA over Cat5e/6

MC01101-19FQ



HDMI Cable

HDMI, the HDMI Logo, and High Definition Multimedia Interface are trademarks of HDMI Licensing LLC in the United States and other countries.

SECO-LARM®

16842 Millikan Ave, Irvine, CA 92606

Tel: 949-261-2999 / 800-662-0800 • Fax: 949-261-7326

sales@seco-larm.com • www.seco-larm.com



Copyright 2013 © SECO-LARM U.S.A, Inc. All rights reserved.
The SECO-LARM policy is one of continual development. For that reason, SECO-LARM reserves the right to change prices and specifications without notice. SECO-LARM is not responsible for misprints.

SECO-LARM® ENFORCER® CRIMEBUSTER® CBA SLI®

PIMVA-VH010Q.docx