




NC303-TD


IR Fixed Dome Network Camera

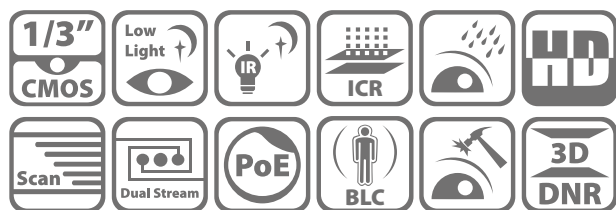

Key features

- 3MP high resolution
- HD real-time video
- 3D DNR & DWDR & BLC
- IR LEDs: up to 30m
- IP66
- Vandal-proof
- PoE
- Onboard storage (up to 64GB)

Dimensions

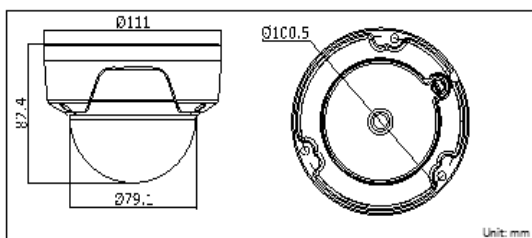

NC303-TD	
Camera	
Image sensor	1/3" Progressive Scan CMOS
Min. illumination	0.07Lux @F1.2, AGC ON, 0 lux with IR
Shutter time	1/3s ~ 1/100,100s
Lens	4mm @ F2.0 (2.8mm, 6mm optional) 2048 × 1536: Angle of view: 86°(2.8mm), 70°(4mm), 43.3°(6mm) 1920 × 1080: Angle of view: 98.5°(2.8mm), 79°(4mm), 49°(6mm)
Lens mount	M12
Angle adjustment	Pan: 0° ~ 355°, Tilt: 0° ~ 65°, Rotation: 0 ~ 360°
Digital noise reduction	3D DNR
Wide dynamic range	Digital WDR
Day & night	IR cut filter with auto switch
Compression Standard	
Video compression	H.264 / MJPEG
H.264 codec profile	Main profile
Bit rate	32 Kbps ~ 16 Mbps
Dual stream	Yes
Image	
Max. Image Resolution	2048 × 1536
Frame rate	50Hz: 20fps (2048 × 1536), 25fps (1920 × 1080), 25fps (1280 × 720) 60Hz: 20fps (2048 × 1536), 30fps (1920 × 1080), 30fps (1280 × 720)
Image settings	Saturation, brightness, sharpness, contrast, sharpness adjustable through client software or web browser
BLC	Yes, zone configurable
ROI	Yes, up to 3 configurable areas
Network	
Network storage	Local storage: Built-in Micro SD/SDHC/SDXC card slot, up to 64 GB ; NAS Face detection, line crossing detection, intrusion detection, scene change detection,
Alarm trigger	Motion detection, Dynamic Analysis, Tampering alarm, Network disconnect, IP address conflict, Storage full, Storage error
Protocols	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, SNMP, IGMP, 802.1X, QoS, IPv6, Bonjour
System compatibility	ONVIF, PSIA, CGI, ISAPI
General functionalities	User Authentication, Watermark
General function	Flickerless, dual stream, heartbeat, mirror, password protection, watermark
Interface	
Communication Interface	1 RJ45 10M/100M Ethernet interface
Wi-Fi Specification (Only for -C model)	
Wireless Standards	IEEE802.11b, 802.11g, 802.11n Draft
Frequency Range	2.4 GHz ~ 2.4835 GHz
Channel Bandwidth	20/40MHz Support
Protocols	802.11b: CCK, QPSK, BPSK ; 802.11g/n: OFDM
Security	64/128-bit WEP, WPA/WPA2, WPA-PSK/WPA2-PSK, WPS
Transmit Output Power	11b: 17±1.5dBm @ 11Mbps ; 11g: 14±1.5dBm @ 54Mbps ; 11n: 12.5±1.5dBm
Receive Sensitivity	11b: -90dBm @ 11Mbps (Typical) ; 11g: -75dBm @ 54Mbps (Typical) ; 11n: -74dBm (Typical)
Transfer Rates	11b: 11Mbps ; 11g: 54Mbps ; 11n: up to 150Mbps
Wireless Range	Outdoor: 200m, Indoor: 50m ; *The performance varies based on actual environment.
Wireless Standards	IEEE802.11b, 802.11g, 802.11n Draft
General	
Operating conditions	-30 °C ~ 60 °C (-22 °F ~ 140 °F) ; Humidity 95% or less (non-condensing)
Power supply	12 V DC ± 10% ; PoE (802.3af)
Power consumption	Max. 5 W (Max. 7 W with IR cut filter on)
Impact protection	IEC60068-2-75Eh, 20j; EN50102, up to IK10
Ingress protection	IP66
IR range	30 meters
Dimensions	Φ111 × 100.5 (4.4" × 3.96")
Weight	500g (1.1 lbs)

Winic Technologies USA Inc.

42 Central Avenue, Farmingdale, New York 11735

Tel: +631-396-0800

Fax: +631-396-0805

Email: sales@winictech.com

www.winictech.com