




INCLUDED



HARDENED

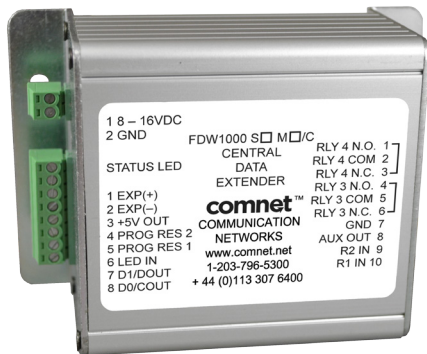

The ComNet™ FDW1000 data extenders provide optical connectivity between one card reader and its associated door or gate locking hardware, to any Wiegand, MagStripe, or F/2F-based control panel. The connection is completely supervised and secure, and a pair of these units will support a single locking gate or door and its associated reader using two multimode or singlemode optical fibers. When used with the ComNet EXP-100 Expansion Module, up to seven gates or doors and readers may be integrated onto the same network. A service mode provides easy and fast set-up and configuration when the EXP-100 is used, and user selection of the reader formats via DIP-switch setting is included. An auxiliary I/O (input/output) interface is available for determining door, gate, and control panel status and signaling, and a relay interface provides the door strike or gate activation functions. These extenders are designed for long-term, reliable operation in harsh industrial environments, and a fault-specific LED indicator is provided for rapidly ascertaining the operating status of the extender and the link. Packaged in a rugged aluminum housing, the FDW1000 is designed for shelf or surface mounting. The FDW1000 series are supplied as a remote unit for door or gate locations, and a central unit for control panel installation.

## FEATURES

- › Wiegand, MagStripe, or F/2F-based reader formats/control panel-compatible.
- › Completely supervised and secure operation
- › Service mode provides simple and fast system set-up and configuration
- › DIP-switch selection of the desired reader format
- › Auxiliary I/O (input/output) interface is available for ascertaining door, gate, and control panel status and signaling.
- › Relay interface provides door strike or gate activation functions.
- › LED fault-specific status indicator for rapidly determining the operating status of the extender and the link.
- › Voltage transient/surge protected.
- › Small size: Ideal for use in those installations where space is at a premium.
- › Plug-and-play design ensures ease of operation, and no optical adjustments are ever required.
- › Lifetime warranty
- › Made in the USA

## APPLICATIONS

- › Optical extension of any Wiegand, MagStripe, or F/2F-based control panel and door or gate

## SPECIFICATIONS

## Data

Interface	Wiegand, Strobed (Clock and Data), and F/2F LED: 0 – 30 VDC
-----------	--

## Relays

Maximum Switching Voltage & Current	220 VDC 30W, 1A, resistive load only 250 VAC, 37.5VA, 1A
Running Specification with Load	30 VDC, 1A, resistive load only. Contact lifetime: 1×10e5 operations at 20° C operating temperature. 125 VAC, 0.3A, resistive load only. Contact lifetime: 1×10e5 operations at 20° C operating temperature.

## Fibers

Multimode	Loss Budget	13 dB	850nm	62.5/125µm
	Loss Budget	9 dB	850nm	50/125µm
Single mode: Fibers	Loss Budget	20 dB	1300nm	9/125µm
		2		
Optical Emitter	Laser			
LED Status Indicator	Fault-specific diagnostic LED for operating power and communications link status			

## Connectors

Optical	ST
Data	Removable Screw Terminal Blocks
Power	Removable Screw Terminal Blocks
Relay	Removable Screw Terminal Blocks

## Power

Input	8 to 16 VDC @ 200 mA Max
Output	+5 VDC @ 100 mA

## Electrical &amp; Mechanical

Current Protection:	Automatic Resettable Solid-State Current Limiters
Circuit Board	Meets IPC Standard
Size (L×W×H)	4.5 × 3.1 × 2.0 in (11.4 × 7.8 × 5 cm)
Shipping Weight	<2 lb./0.9 kg

## Environmental

MTBF	>100,000 hours
Operating Temp	-40° C to +75° C
Storage Temp	-40° C to +85° C
Relative Humidity	0% to 95% (non-condensing) <sup>1</sup>

## AGENCY COMPLIANCE



## ORDERING INFORMATION

Part Number	Description	Fibers Required	Fiber	Optical PWR Budget	Maximum Distance <sup>2</sup>
FDW1000M/C	Optical Wiegand Extender, Central Unit	2	Multimode‡ - 62.5/125µm	13 dB	3.5 km (2 miles)
FDW1000M/R	Optical Wiegand Extender, Remote Unit				
FDW1000S/C	Optical Wiegand Extender, Central Unit	2	Single Mode‡ - 9/125µm	20 dB	40 km (24 miles)
FDW1000S/R	Optical Wiegand Extender, Remote Unit				
Accessories	DC Plug-in Power Supply, 90-264 VAC, 50/60 Hz (Included)				
Options	[1] Add 'C' for Conformally Coated Circuit Boards to extend to condensation conditions (Extra charge, consult factory)				

[2] Optical transmission distance is limited to optical loss of the fiber and any additional loss introduced by connectors, splices and patch panels. Distance can also be limited by fiber bandwidth. For 50/125 Fiber subtract 4 dB from Optical Power Budget.