

# **Request-to-Exit Plates** with Pneumatic Timer

## **SD-7213-GSP**

Single-Gang, Green Mushroom Cap **SD-7213-RSP** 

Single-Gang, Red Mushroom Cap










SD-7213-RSP

SALIDA

**Ab** 

#### Sample Application:

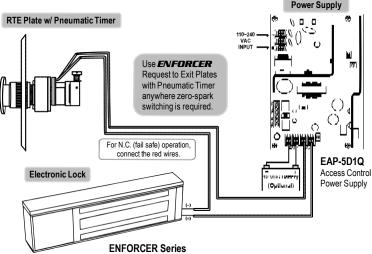

**Specifications:** 

Timer		Pneumatic: 1~60 seconds*
Switching capacity		5A@125VAC
Operating temperature		32°~131°F (0°~55°C)
Wiring	Red	2x N.C. #18 AWG 9" (230mm)
	White	2x N.O. #18 AWG 9" (230mm)
Dimensions		4 <sup>1</sup> / <sub>2</sub> "x1 <sup>1</sup> / <sub>2</sub> "x3 <sup>1</sup> / <sub>2</sub> " (115x39x88 mm)

\*Note: Time is precise to within ±10% for constant temperature and may change according to environmental factors.

#### Special Order RTE Pneumatic Timers\*\*:

Electromagnetic Lock







SD-7273-SSP

SD-7173-SSP

\*\*Note: For details, please contact SECO-LARM

RéH


#### SECO-LARM<sup>®</sup>U.S.A., Inc.

16842 Millikan Avenue, Irvine, CA, 92606 Phone: (949) 261-2999 | (800) 662-0800 Fax: (949) 261-7326 Website: www.seco-larm.com Email: sales@seco-larm.com

Copyright 2015 © SECO-LARM U.S.A, Inc. All rights reserved. The SECO-LARM policy is one of continual development. For that reason, SECO-LARM reserves the right to change prices and specifications without notice. SECO-LARM is not responsible for misprints.

SECO-LARM® **ENFORCER® CRIMEBUSTER®** CBA **SLI** 

Pi\_SD-7213-xSP\_080715\_b.docx

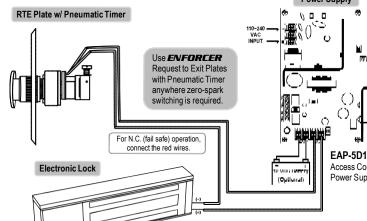

### Features:

- Green or red mushroom cap pushbutton
- Pneumatic timer no power required
- Excellent for installations where supplying • additional timer power is inconvenient
- Reliable American-made pneumatic components •
- Stainless-steel single-gang or slimline plate •
- English "EXIT" and Spanish "SALIDA" printed • on plate
- Timer adjustable for 1~60 seconds •
- Conforms to NFPA 101 Fire Codes for • non-electrical breaking of contact