





Instruction Sheet For:


LCD-1C, LCD-1CB & LCD-1 CW

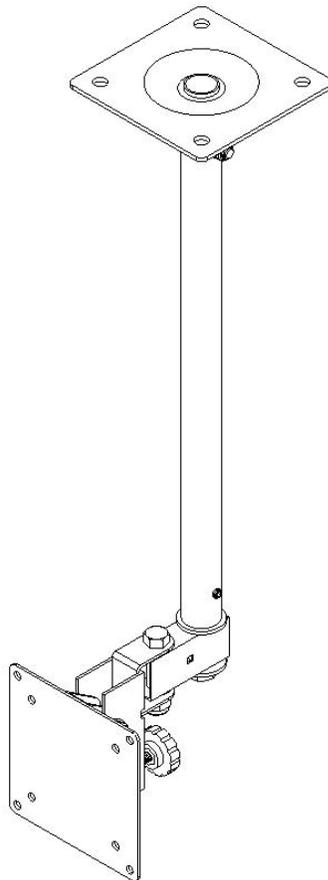


For more information, please contact us at:
325 Log Canoe Circle, Stevensville, Maryland 21666
(T) 410.643.6390 / (F) 410.643.6615
www.videomount.com

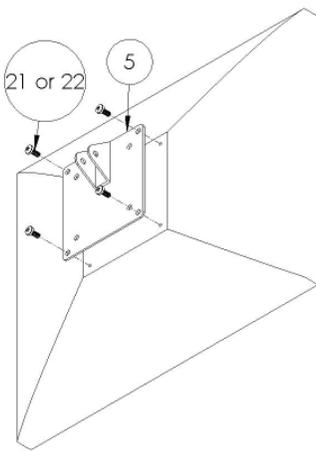

Step 2: Attaching the mounting plate to the LCD

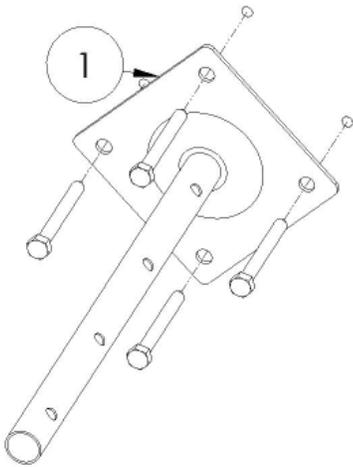

Step 3: Attaching the ceiling plate to the ceiling

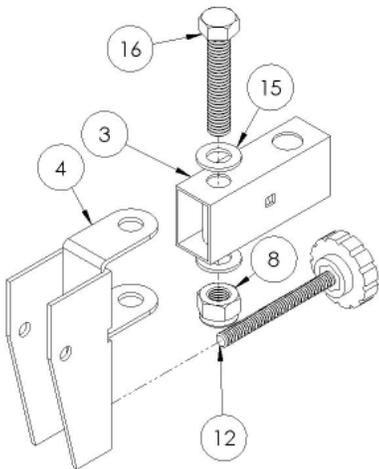

Step 4: Attaching the swivel bracket to the support tube

Step 1

Before starting, lay out all parts to your mount and match them to the parts list provided. Verify that you have all your parts before attempting to assemble the mount.

Step 2


Attach the mounting plate (5) to the LCD using the M4 (22) or M5 (21) screws.

Step 3


Mark the wall or desired mounting surface in preparation of installation of wall mounting plate (1). Pre-drill if necessary and mount wall plate to desired surface. Mount wall plate (1) with small welded rotation stoppers to the bottom of the plate. **Warning: Please verify that your mounting surface will support the combined weight of your mount, mounting hardware, and monitor. Also verify that the mounting surface is safe to drill through. If in doubt, please contact a professional installer.**

Step 4


Attach the swivel bracket assembly from step 2 to the support tube (3) using the 3/8" screw (16), washers (15) and nylon nut (8). Insert adjustable screw (12) into the back of the swivel bracket (4) for use when tilting the monitor.

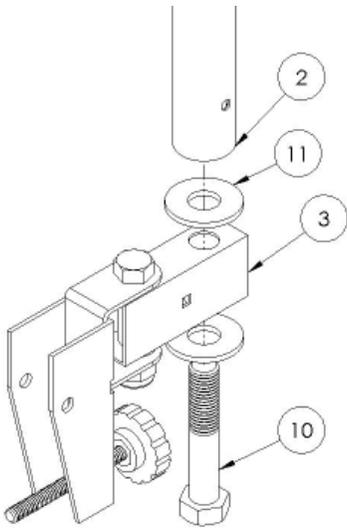

Step 5: Attaching the support tube to the extension tube

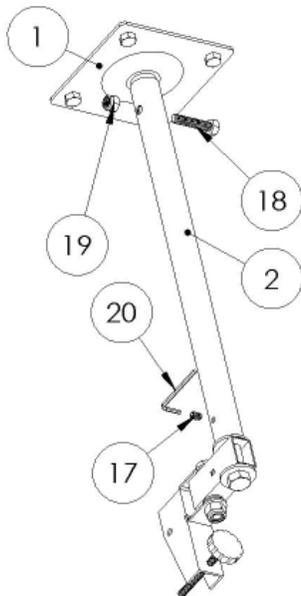

Step 6: Attaching the extension tube to the ceiling plate

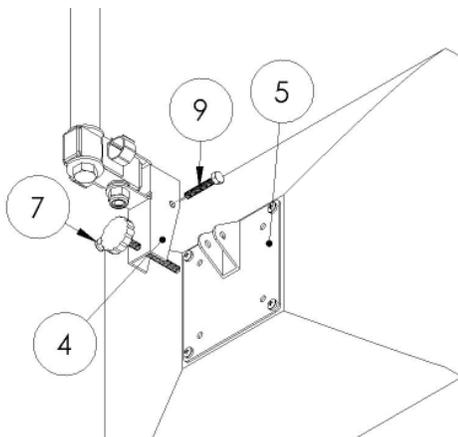

Step 7: Attaching the mounting plate to the swivel bracket

Step 5

Attach the support tube (3) to the extension tube (2) using the M12 screw (10) and washers (11).

Step 6

Attach the extension tube (2) to the ceiling plate (1) using the 5/16" screw (18) and nylon nut (19). Secure the M12 screw (10) from slipping in the extension tube (2) by tightening the 1/4" brake screw (17) into the threaded hole in the side of the extension tube (2) using the Allen key (20).

Step 7

Attach the mounting plate (5) to the swivel bracket (4) using the M6 screw (9) and nylon nut (7).

Step 8

Insert end plugs (14) into the support tube (3). For cable management, insert the cable clips (13) by pushing the arrow ends into the square holes in the support tube (3).

Please verify that all nuts and screws are securely tightened.



Enjoy Your Mount!

WARNING: The installer of these products must verify that the mounting surface, ceiling or wall, will safely support the combined weight of all attached equipment and hardware. Video Mount Products will not be held liable for the improper use or installation of its products.