


# ACMS8 and ACMS8CB

## Multi-Output Access Power Controllers

### Description

Altronix ACMS8 and ACMS8CB dual input design allows power to be steered from two (2) independent low voltage 5 to 24 VDC power sources into eight (8) independently controlled fuse or PTC protected outputs. In ACMS8, these power outputs can also be converted to dry form "C" contacts. Outputs are activated by an open collector sink, normally open (NO) or normally closed (NC) dry trigger input from an Access Control System, Card Reader, Keypad, Push Button, PIR, etc. ACMS8/ACMS8CB will route power to a variety of access control hardware devices including Mag Locks, Electric Strikes, Magnetic Door Holders, etc. Outputs will operate in both Fail-Safe and/or Fail-Secure modes. The FACP Interface enables Emergency Egress, Alarm Monitoring, or may be used to trigger other auxiliary devices. The fire alarm disconnect feature is individually selectable for any or all of the eight (8) outputs. The spade connectors allow you to daisy chain power to multiple ACMS8/ACMS8CB modules. This feature allows you to distribute the power over more outputs for larger systems.

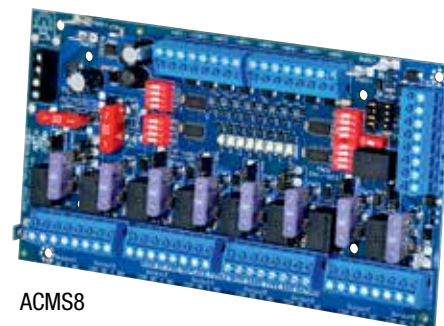

ACMS8

### Specifications

#### Input

##### Voltage Range

**ACMS8:** 5VDC to 24VDC, up to 10A each or 20A total input.

**ACMS8CB:** 5VDC to 24VDC up to 10A each or 16A total input.

**Current Consumption:** 0.6A @ 12V, 0.3A @ 24V with all relays energized.

**Main Fuse Rating** 10/32A.

#### Trigger Inputs:

Eight (8) individually controlled trigger inputs:

- Normally open (NO) inputs.
- Normally closed (NC) inputs.
- Open collector sink inputs.
- Wet Input (5VDC - 24VDC) with 10K resistor.
- Any combination of the above.

#### Outputs

**ACMS8:** Fuse protected outputs rated @ 2.5A per output, non power-limited. Total output 20A max. Do not exceed the individual power supply ratings.

**ACMS8CB:** PTC protected outputs rated @ 2A per output, Class 2 power-limited. Total output 16A max. Do not exceed the individual power supply ratings.

Eight (8) selectable 5VDC - 24VDC independently controlled outputs or eight (8) indepently controlled Form "C" relay outputs:

- Fail-Safe and/or Fail-Secure power outputs.
- Form "C" Relays. 28VAC or VDC @ 2.5A Rated.
- Auxiliary power outputs (unswitched).
- Any combination of the above.

Any of the eight (8) fuse protected power outputs are selectable to follow power Input 1 or Input 2.

Individual outputs may be set to OFF position for servicing.

#### Output Ratings:

**ACMS8:** Fuses are rated 2.5A each.

**ACMS8CB:** PTCs are rated 2A each.

Total output current is determined by the power supply(ies), not to exceed a maximum of 10A for each input.

#### Fire Alarm Disconnect

**Supervised** Latching or non-latching, individually selectable for any or all of the eight (8) outputs.

**EOL** 10K Resistor.

#### Indicators (LED)

**Red LEDs** Outputs are triggered (relays energized).

**Blue LED** FACP disconnect is triggered.

#### Individual voltage LEDs

**Green:** 12VDC

**Red/Green:** 24VDC.

#### Physical and Environmental

##### Dimensions (W x L x H)

7.65" x 4.125" x 1.25" (194.3mm x 104.8mm x 31.8mm).

**Product Weight** 0.7 lb. (0.32 kg).

**Shipping Weight** 0.95 lb. (0.43 kg).

##### Temperature

**Operating** 0°C to 49°C (32°F to 120°F).

**Storage** -20°C to 70°C (-4°F to 158°F).

**Relative Humidity** 93% +/-5%.

**BTU/Hr. (approx.):** 4 BTU/Hr.

# ACMS8 and ACMS8CB Multi-Output Access Power Controllers




## ACMS8K1 and ACMS8CBK1

Altronix offers ACMS8(CB) kits which include a multi-output Access Power Controller and VR6 - Voltage Regulator, along with all necessary hardware.

Altronix VR6 & ACMS8 easily snap together to provide 12VDC and 24VDC simultaneously – individually selectable over each of the 8 outputs... all on one footprint!

- VR6 reduces the cost of adding another power supply.
- ACMS8 is designed to piggyback onto the VR6, making an instant plug-in connection via common standoffs.
- Stackable mounting configuration saves valuable enclosure space.

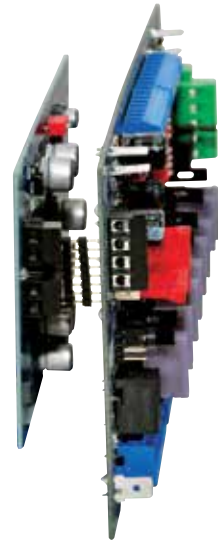

## Board Dimensions (L x W x H) and Drawing

7.65" x 4.125" x 1.25" (194.3mm x 104.8mm x 31.8mm)

