



1/4" Concealed-Mount Contacts

SM-206Q/BR

1" (25mm) Gap, Closed Loop, Brown

SM-206Q/W

1" (25mm) Gap, Closed Loop, White

Features:

- Used for protecting sliding doors and windows where space is limited
- 1/4 " Press-fit mount
- 15" (38cm) wire leads
- Contact reed switch is SPST, deactivated rhodium on gold under-plating for a longer expected life
- Unique glue/epoxy compound protects reed switch
- · For closed loop circuits
- 1" (25mm) Gap
- Lifetime limited warranty










15" Wire-Leads



Specifications:

Model number		SM-206Q/BR	SM-206Q/W
Circuit type		Closed loop	
Operation gap		1" (25mm)	
Color		Brown	White
Leads		Pre-wired 15", #22	
Material	Case	High-impact ABS plastic / epoxy compound	
	Contact	Deactivated rhodium on gold under-plating	
Contact rating		0.1A@100VDC (max)	
		1.0A@10VDC (max)	
		10W (max)	
Temperature		-15°~160°F (-25°~70°C)	
Switch cycles		50 Million (0.1mA@5VDC)	
Switch dimensions		1 ⁷ / ₃₂ "x ¹ / ₄ " (31x6.35mm)	
Magnet dimensions		1 ¹ / ₄ "x ¹ / ₄ " (32x6.35mm)	
Magnet		Alnico 5	

Dimensions:

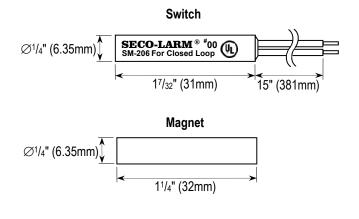

SECO-LARM® U.S.A., Inc.

16842 Millikan Avenue, Irvine, CA 92606

Phone: (949) 261-2999 | (800) 662-0800 Fax: (949) 261-7326 Website: www.seco-larm.com Email: sales@seco-larm.com

Copyright 2015 © SECO-LARM U.S.A., Inc. All rights reserved.
All trademarks are the property of SECO-LARM U.S.A., Inc. or their respective owners.
The SECO-LARM policy is one of continual development. For that reason, SECO-LARM reserves the right to change prices and specifications without notice. SECO-LARM is not responsible for misprints.