

3/8" Concealed-Mount Contacts

SM-207Q/BR

1" (25mm) Gap, Closed Loop, Brown

SM-207Q/W

1" (25mm) Gap, Closed Loop, White

Features:

- Used for protecting sliding doors and windows where space is limited
- 3/8" Press-fit mount
- 15" (38cm) wire leads
- Contact reed switch is SPST, deactivated rhodium on gold under-plating for a longer expected life
- Unique glue/epoxy compound protects reed switch
- For closed loop circuits
- 1" (25mm) Gap
- Lifetime limited warranty




SM-207Q/BR Shown



Specifications:

Model number	SM-207Q/BR	SM-207Q/W
Circuit type	Closed loop	
Operation gap	1" (25mm)	
Color	Brown	White
Leads	Pre-wired 15", #22	
Material	Case	High-impact ABS plastic / epoxy compound
	Contact	Deactivated rhodium on gold under-plating
Contact rating	0.1A@100VDC (max)	
	1.0A@10VDC (max)	
	10W (max)	
Temperature	-15° ~160°F (-25° ~70°C)	
Switch cycles	50 Million (0.1mA@5VDC)	
Switch dimensions	1 3/8" x 7/16" x 3/8" (35x11x9mm)	
Magnet dimensions	1 3/8" x 7/16" x 3/8" (35x11x9mm)	
Magnet	Alnico 5	

Dimensions:

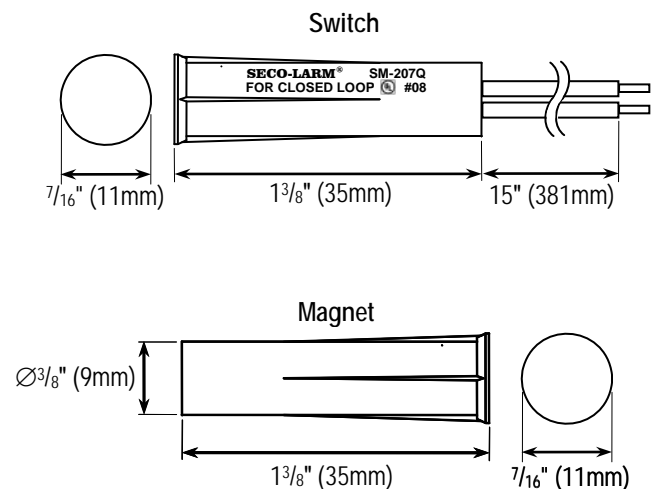

SECO-LARM® U.S.A., Inc.

16842 Millikan Avenue, Irvine, CA 92606

Phone: (949) 261-2999 | (800) 662-0800 Fax: (949) 261-7326

Website: www.seco-larm.com Email: sales@seco-larm.com