


## SPECIFICATIONS

<b>Focal Length</b>	10 - 310 mm	<b>Flange Back</b>	17.526 mm
<b>Maximum Relative Aperture</b>	1:1.5	<b>Operation</b>	<b>Zoom</b> Motorized (DC 6-12V, Max 60mA)
<b>Iris</b>	F1.5 - 1000		<b>Focus</b> Motorized (DC 6-12V, Max 60mA)
<b>Zoom Ratio</b>	31 X		<b>Iris</b> Motorized (DC 6-12V, Max 60mA)
<b>Angular Field of View</b>	35.3° x 26.7° at 10 mm 1.27° x 0.90° at 310 mm	<b>Operation Temperature</b>	- 10 °C ~ 50 °C / 14 °F ~ 122 °F
<b>Image Format</b>	6.4 x 4.8 mm (∅8 mm)	<b>Mount</b>	C-Mount (Adjustable Lens Position)
<b>Minimum Object Distance</b>	2.8 m ( From Front Vertex )	<b>Front Thread</b>	62 mm P0.75
<b>Optical Back Focal Distance</b>	14.57 mm (In Air)	<b>Size, Weight</b>	112(W) x 100(H) x 238.5(D) mm, Approx. 1.85kg

## DIMENSIONS

UNIT: mm

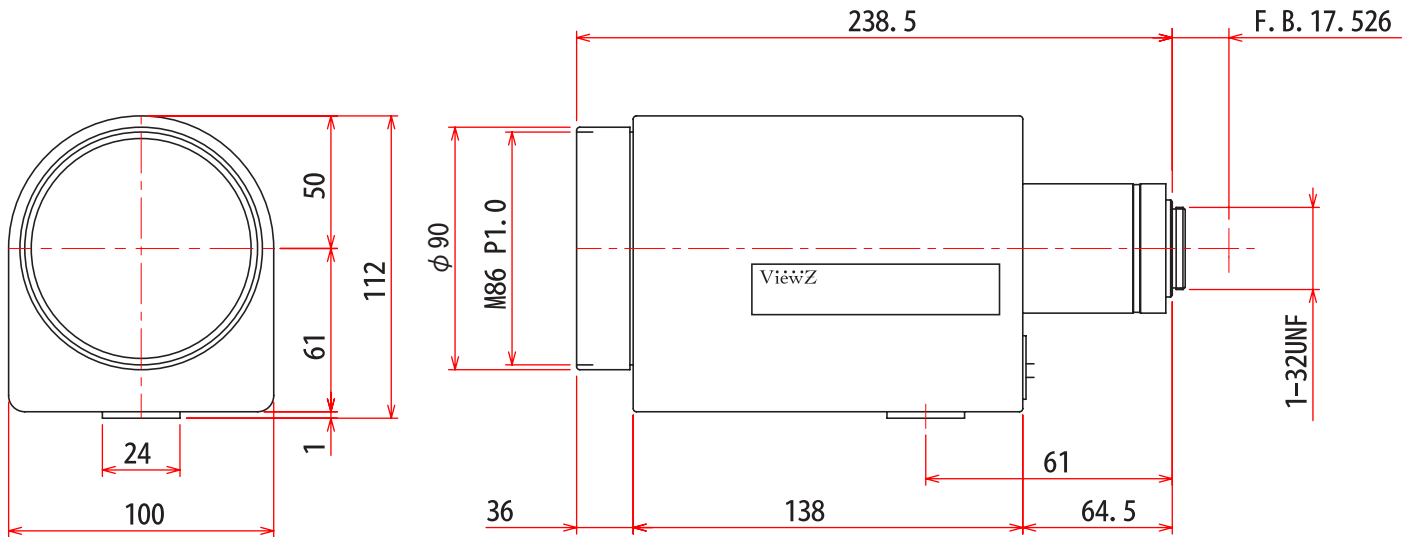

## CIRCUIT DIAGRAM

