


32W-S Blaze Series

Visible White Light

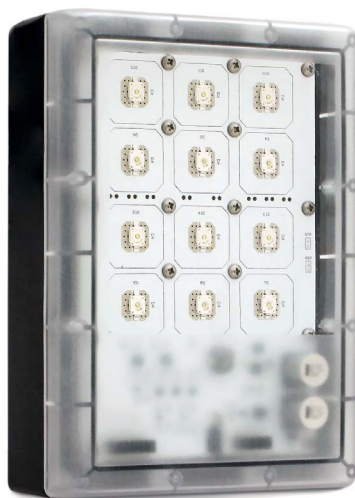

EVENT-DRIVEN FUNCTIONALITY

Connects to a camera AND an alarm (or any other trigger device) via I/O ports to turn ON the white light upon pre-set conditions.

EASY INTEGRATION

Seamless and precise integration via I/O ports. Link multiple units together. Sync with camera or any other system device with input or output capability.


SIMPLE INSTALLATION

Extended range (12-36) VDC or (12-24) VAC low-voltage input for simplified installation.

MADE IN THE USA - LIFETIME WARRANTY

All products are designed and built in the USA and covered by a lifetime warranty.

ILLUMINATION DISTANCE

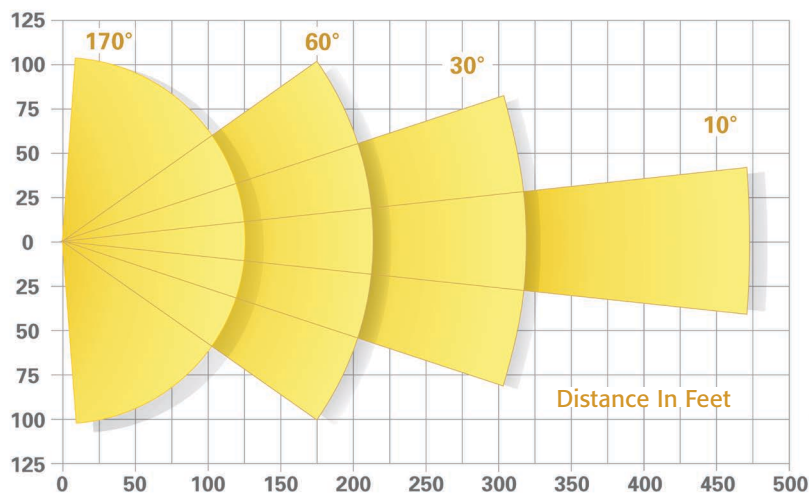

Angle: 170°

Range: 120'/37m
HFOV: 215'/66m

Angle: 60°

Range: 210'/64m
HFOV: 190'/58m

Angle: 30°

Range: 320'/98m
HFOV: 165'/50m

Angle: 10°

Range: 475'/144m
HFOV: 100'/30m

TIPS:

White (Visible) Light = Color Image


Color images contain important information helpful to security professionals during an alarm, or in the after-the-fact event assessment.

Consider using I/O ports to sync Light & Camera


Input/Output ports allow to hard-wire light & the camera for seamless switching from day to night modes. You may also daisy chain multiple lights to switch ON/OFF synchronously.

SPECIFICATIONS

Input Voltage	24 V AC/DC
Power Consumption	24W
Operating Temperature	-58°F...+140°F / -50°C...+60°C
Dimensions	5" x 7" x 2.5" / 127 x 178 x 64 mm
Weight	3 lbs/1.4kg.
Environmental	IP 67
Mounting	Tilting U-Bracket (included)

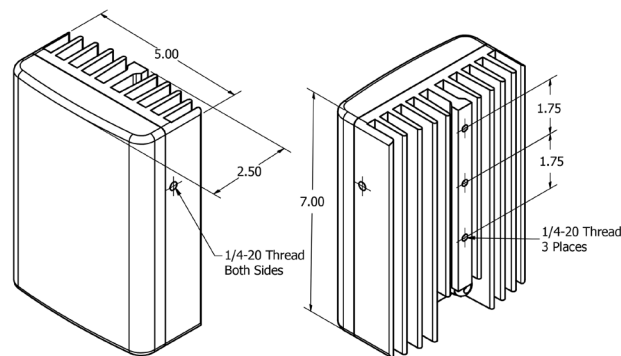

TILTING
U-BRACKET
included*



*Free to swap with
Mobotix or L bracket