Armored Door Cords

SD-969-M15   *Cord with Removable Cover*
SD-969-T15   *Cord with Terminal Blocks*
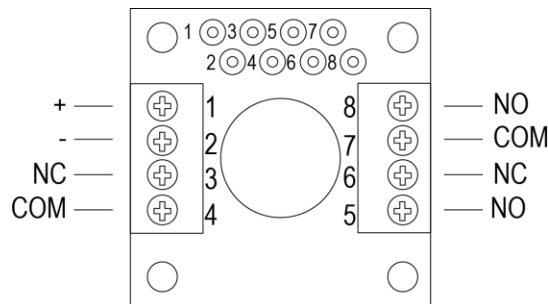
Features:

- Designed to conduct power to electric locks or access systems
- Once mounted, to access, simply remove cover. Door cord stays in place. No need to remove from the door. Prevents stripping of the screws and mounting points
- Surface-mounted
- Terminal blocks with pre-wired cables (8 connections) for quick, easy, and secure installation
- Maximum current – 3A@30VAC/VDC*
- 15" (39cm) Stainless steel armored cord
- Inside door-cord diameter: 5/16" (8mm)
- Outside door-cord diameter: 7/16" (11mm)
- Security screws (included) prevent tampering
- Available in bronze or silver finish

*SD-969-M15
(bronze-finish)*

Specifications:

Model	SD-969-M15	SD-969-T15
Cord Length	15" (39cm)	
Terminal Block	No	Yes
Maximum Current	N/A	3A@30VAC/VDC
Construction	Stainless-steel armored	
Outside Diameter	$^7/_{16}$" (11mm)	
Inside Diameter	$^5/_{16}$" (8mm)	

Terminal Block Wiring Diagram:

(SD-969-T15 only)

```
    1 ○3○5○7○
     2○4○6○8○
+ ——  1      8  —— NO
- ——  2      7  —— COM
NC —— 3      6  —— NC
COM —— 4     5  —— NO
```

*SD-969-T15
(silver-finish)*

Note: Each terminal is wired on a one to one basis, meaning that whatever is wired to a particular terminal number on one block will be connected to the same terminal number on the other block.

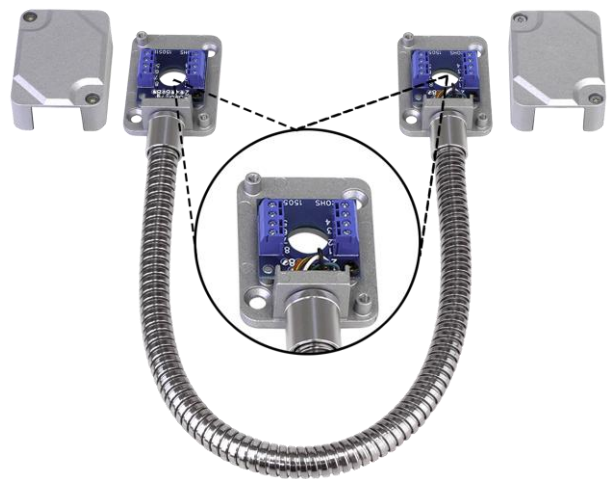**Refers only to the SD-969-T15*

SECO-LARM® U.S.A., Inc.
16842 Millikan Avenue, Irvine, CA 92606
Phone: (949) 261-2999 | (800) 662-0800 **Fax:** (949) 261-7326
Website: www.seco-larm.com **Email:** sales@seco-larm.com

SECO-LARM® ENFORCER® CRIMEBUSTER® CBA SLI

PI_SD-969-x15_160210.docx