


50-Pair 66 Wiring Block W/O Bracket

PRODUCT SPECIFICATION

Package includes:

A. 50-Pair 66 Wiring Block, 1 pc

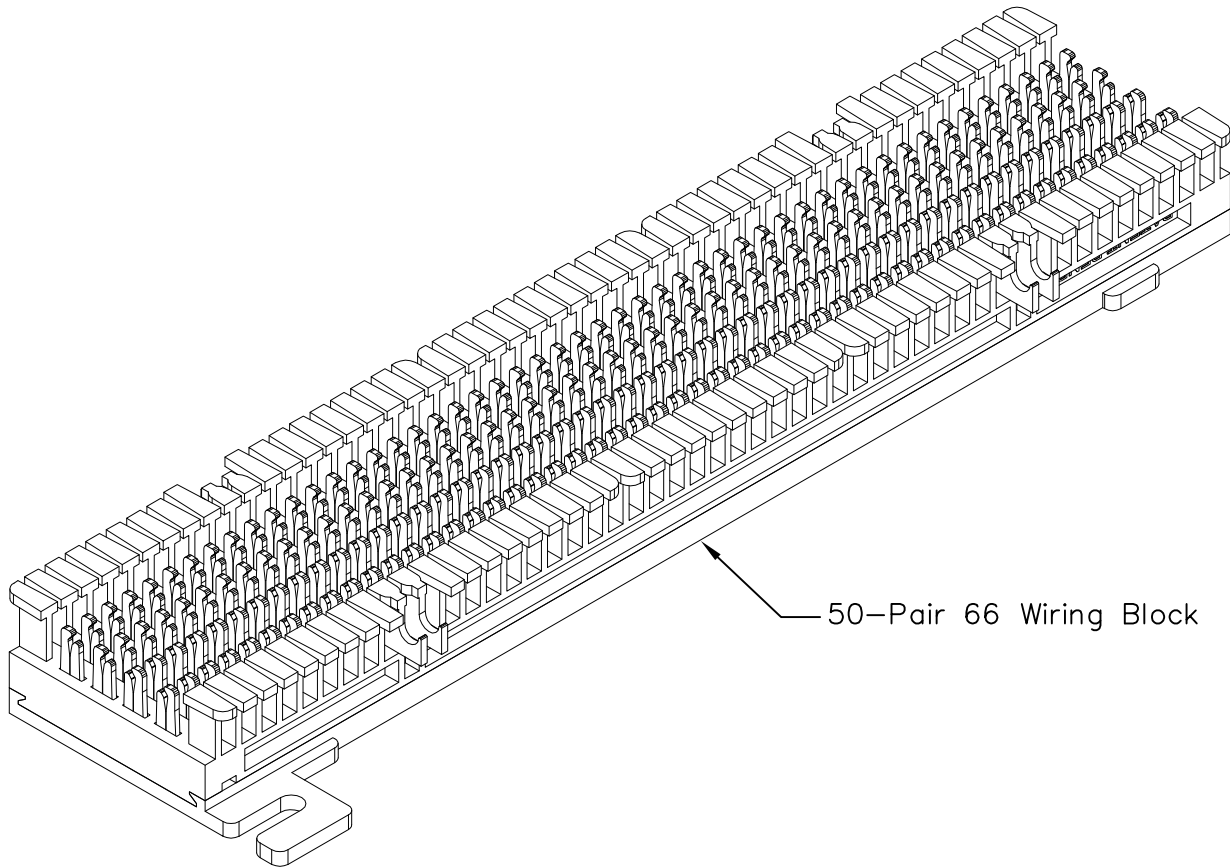

Features and Benefits:

- Designed for voice and data applications
- Exceeds ANSI/TIA-568-C requirements for permanent, channel link and component performances
- Durable and strong high impact flame retardant material
- Mounts on wall or on ICMB89B0WH 89B mounting bracket
- Used with IC066BRCLP 66 wiring block bridging clips, IC066CV050 66 wiring block cover, and IC066LS050 66 wiring block labeling strips
- UL 1863 compliant



66 WIRING BLOCK W/O BRACKET, 50-PAIR

ITEM NO.	IC066NB050
DWG NO.	PS066NB050

REV.	B
PAGE NO.	1



CUSTOMER CARE / TECHNICAL SUPPORT * CSR@ICC.COM / 888-ASK-4-ICC (275-4422) * 2100 E. Valencia Dr, Suite D, Fullerton, CA 92831* www.icc.com

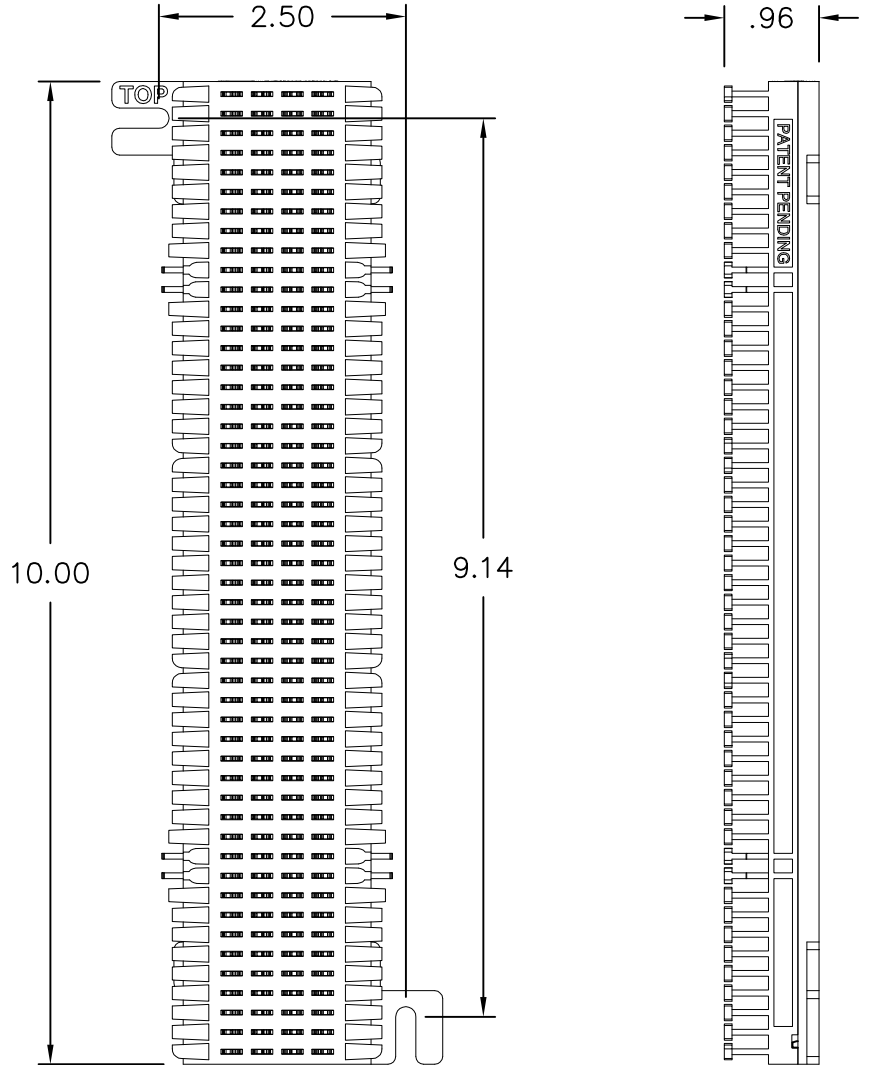

NOTE: UNLESS OTHERWISE SPECIFIED

1. ENVIRONMENTAL CONDITIONS:

- TEMPERATURE STORAGE
- STORAGE: -40 TO +70°C
- OPERATIONAL: -10 TO +60°C
- RELATIVE HUMIDITY (OPERATIONAL):
MAXIMUM NONCONDENSING 93%

2. ELECTRICAL:


- ELECTRICAL INSULATION RESISTANCE:
500 MOHMS MIN. @ 100V D.C.
- DIELECTRIC WITHSTANDING VOLTAGE:
1000V RMS @ 60Hz FOR 1 MINUTE
- CONTACT RESISTANCE: 2.5 mOHMS MAX.


3. MECHANICAL:

- TRANSVERSE EXTRACTION FORCE
MINIMUM 5N FOR 24 AWG
MINIMUM 3N FOR 26 AWG
- INSERTION/EXTRACTION LIFE: 200 CYCLES MINIMUM
- IDC WIRE GAUGE: 22~26 AWG

4. PHYSICAL:

- HOUSING: HIGH-IMPACT, FLAME RETARDANT PLASTIC, UL 94V0
- IDC: BRASS PLATED WITH 100 MICRO-INCH OF Sn.



66 WIRING BLOCK W/O BRACKET, 50-PAIR		 <i>PremiumProducts</i> <i>ProvenPerformance</i> <i>CompetitivePrices</i>	
ITEM NO.	IC066NB050		REV. B
DWG NO.	PS066NB050	PAGE NO.	2

CUSTOMER CARE / TECHNICAL SUPPORT * CSR@ICC.COM / 888-ASK-4ICC (275-4422) * 2100 E. Valencia Dr, Suite D, Fullerton, CA 92831* www.icc.com