


50-Pair 66 Wiring Block 25 Pk

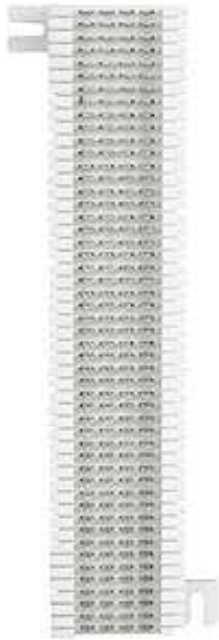

Package Includes

A. 50-Pair 66 Wiring Block, 25 pcs

Features and Benefits

- Designed for voice and data applications.
- Performance exceeds Category 5e connecting hardware requirements specified in TIA/EIA-568-C.2.
- Durable and strong high impact flame retardant material.
- Mounts on wall or on ICMB89B0WH 89B mounting bracket.
- Used with IC066BRCLP 66 wiring block bridging clips, IC066CV050 66 wiring block cover, and IC066LS050 66 wiring block labeling strips.

Part No: IC066NBC50


Rev: A

Page 1 of 2

| 888-ASK-4ICC | icc.com | csr@icc.com |



Specifications

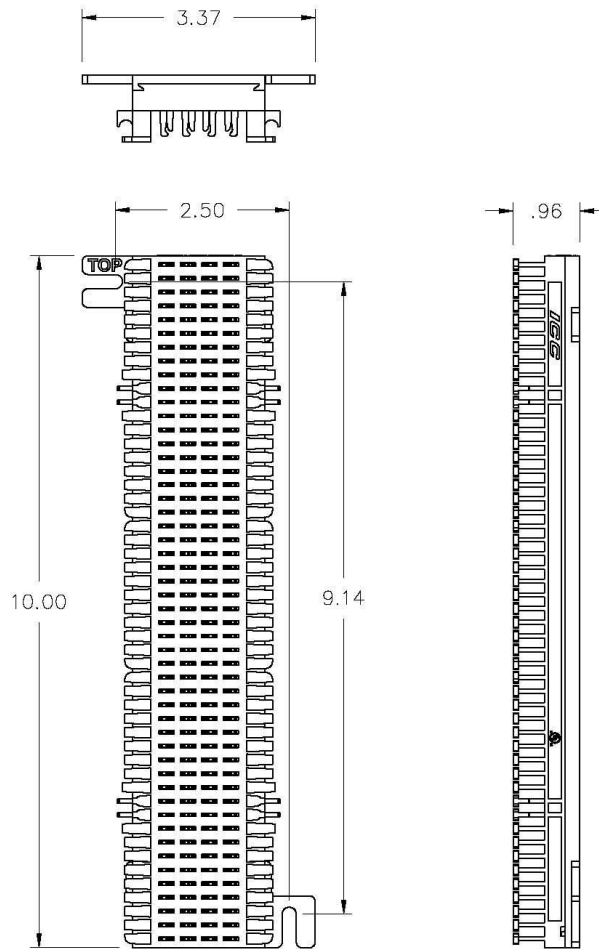

NOTE: UNLESS OTHERWISE SPECIFIED

1. ENVIRONMENTAL CONDITIONS:
 - TEMPERATURE STORAGE
 - STORAGE: -40 TO +70°C
 - OPERATIONAL: -10 TO +60°C
 - RELATIVE HUMIDITY (OPERATIONAL): MAXIMUM NONCONDENSING 93%
2. ELECTRICAL:
 - ELECTRICAL INSULATION RESISTANCE: 500 MOHMS MIN. @ 100V D.C.
 - DIELECTRIC WITHSTANDING VOLTAGE: 1000V RMS @ 60Hz FOR 1 MINUTE
 - CONTACT RESISTANCE: 2.5 mOHMS MAX.
3. MECHANICAL:
 - TRANSVERSE EXTRACTION FORCE: MINIMUM 5N FOR 24 AWG; MINIMUM 3N FOR 26 AWG
 - INSERTION/EXTRACTION LIFE: 200 CYCLES MINIMUM
 - IDC WIRE GAUGE: 22-26 AWG
4. PHYSICAL:
 - HOUSING: HIGH-IMPACT, FLAME RETARDANT PLASTIC, UL 94V0
 - IDC: BRASS PLATED WITH 100 MICRO-INCH OF Sn.

For warranty information, go online to icc.com/warranty.

Part No: IC066NBC50

Rev: A

Part No: IC066NBC50

Rev: A

| 888-ASK-4ICC | icc.com | csr@icc.com |

Page 2 of 2

