SC-SC 9/125µm OS1 Singlemode Duplex Fiber Optic Jumper



Package Includes

- A. SC-SC 9/125µm OS1 SM Duplex Fiber Jumper, 1 pc.
- B. Test Results Label, 1 pc.

Features and Benefits


- Made from OFNR riser rated cables, exceeding industry requirements, RFP type Used with ICC fiber optic products Available in 1, 2, 3, 5, 7, and 10 meters Dust Cap included

- Test results included



Page 1 of 2



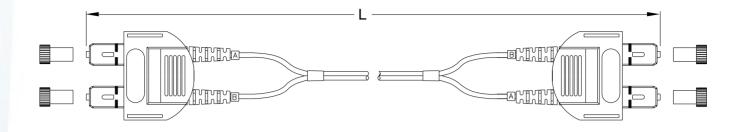

NOTE: UNLESS OTHERWISE SPECIFIED

1. Cable:

A. Color: Yellow

B. Fiber Counts: 2 Fiber Zipcord

C. Fiber Type: Singlemode 9/125µm

D. Attenuation: 0.35/0.20 dB/km @ 1310/1550 nm

E. Bandwidth: N/A

F. Cable Data:

• Cable diameter: .079 in (2.0mm)

• Weight: 12 lbs./kft

Bend radius: 1.2" MIN

• Loading: 135 lbs. MAX

Impact cycle: 1500

2. SC Connector:

A. Ferrule: Zirconia

B. Insertion Loss: 0.2 dB Typical, 0.3 dB MAX

C. Return Loss: 55 dB MIN

D. UPC Polish

3. Compliance:

A. ANSI/TIA-568-C.3

4. Length: XX: 01, 02, 03, 05, 07, & 10

L (LENGTH)
1 METER ± 10 CM
2 METER ± 10 CM
3 METER ± 10 CM
5 METER ± 10 CM
7 METER ± 10 CM
10 METER ± 10 CM

Part No: ICFOJ8C5XX

Rev: A Page 2 of 2 I 888-ASK-4ICC icc.com csr@icc.com

