

# MPO-MPO 10G 50/125 $\mu$ m OM3 MM Fiber Optic Jumper




## Package Includes

- A. MPO-MPO 10G 50/125 $\mu$ m MM Fiber Jumper, 1 pc.
- B. Test Results Label, 1 pc.

## Features and Benefits

- Made from OM3 fiber, compatible with any MPO cassettes & other MPO modules
- Laser optimized fiber optic cable designed for 10 GHz applications
- Made with ClearCurve\*, Bend-insensitive multimode fiber (BIMMF)
- Used with ICC fiber optic products
- Available in 5, 10 15, 20, 30, and 50 meters.
- Dust Cap included
- Test results included
- Used with ICFC fiber cassette series

*\*ClearCurve is a registered trademark of Corning\**

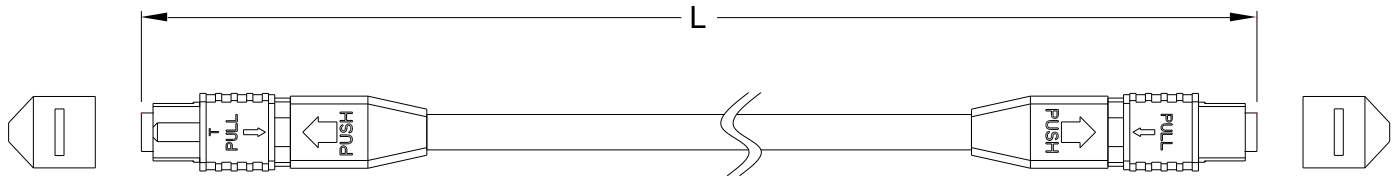

**NOTE: UNLESS OTHERWISE SPECIFIED**

1. Cable:

- A. Color: Aqua
- B. Fiber Counts: 2 Fiber Zipcord
- C. Fiber Type: Laser Optimized MM 50/125µm
- D. Attenuation: 2.3/0.6 dB/km @ 850/1300 nm
- E. Bandwidth: 2000 MHz.km EMB @ 850 nm
- F. Cable Data:

- Cable diameter: .079 in (2.0mm)
- Weight: 12 lbs./kft
- Bend radius: 1.2" MIN
- Loading: 135 lbs. MAX
- Impact cycle: 1500

2. MPO Connector:

- A. Ferrule: Zirconia
- B. Insertion Loss: 0.2 dB Typical, 0.3 dB MAX
- C. Reflection: N/A

2. Compliance:

- A. ANSI/TIA-568-C.3

4. Length: XX: 05, 10, 15, 20, 30, & 50

ITEM NUMBER	L (LENGTH)
ICFOJATG05	5 METER ± 10 CM
ICFOJATG10	10 METER ± 10 CM
ICFOJATG15	15 METER ± 10 CM
ICFOJATG20	20 METER ± 10 CM
ICFOJATG30	30 METER ± 10 CM
ICFOJATG50	50 METER ± 10 CM