
6P6C Telephone Wall Plate




Features and Benefits:

- Configured to fit standard single gang outlet box
- Designed for all voice connectivity to the work area for commercial or residential applications
- Provides with traditional screw down terminals for voice connectivity on the rear
- Rugged and durable construction
- Provides with two mounting standoffs for wall mount telephone
- Available in ivory and white
- ANSI/TIA-568-C and UL 1863 compliant

WA	TCC		
ITEM NO.	IC630DB6XX	REV. B	Premium Products
DWG NO.	PS630DB600	PAGE NO. 1	<u>ProvenPerforman</u> Com

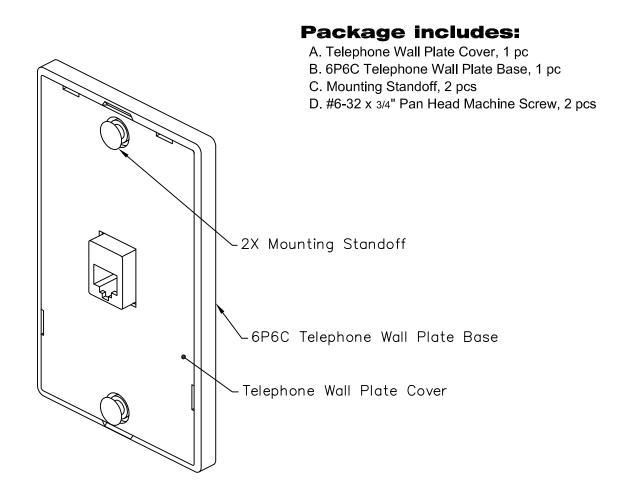

 $\texttt{CUSTOMER CARE / TECHNICAL SUPPORT * CSR@ICC.COM / 888-ASK-4-ICC (275-4422) * 2100 E. Valencia Dr, Suite D, Fullerton, CA 92831 * www.icc.com / Research Company (1998) and the support of the company (1998) and the company (19$

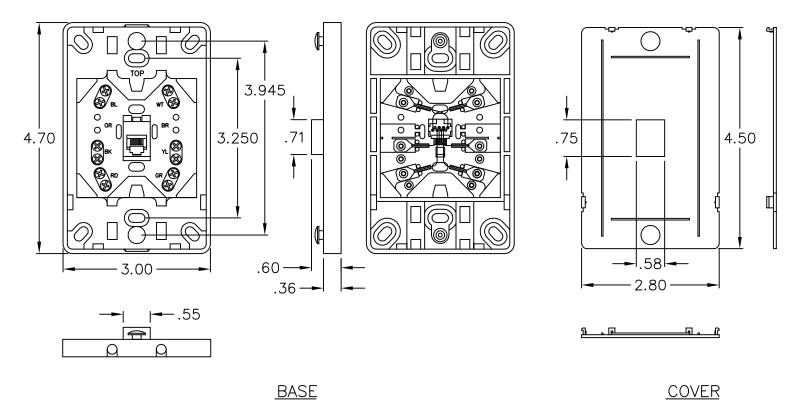

NOTE: UNLESS OTHERWISE SPECIFIED

- 1. MATERIAL & FINISH:
 - A. TELEPHONE WALL PLATE COVER: ABS, UL 94V-0
 - B. 6P6C TELEPHONE WALL PLATE BASE: ABS, UL 94V-0
 - C. COLOR: XX: IV-IVORY & WH-WHITE
 - D. SPRING WIRE CONTACTS: PHOSPHOR BRONZE GOLD PLATING

OVER 100 MICRO INCH NICKEL

1.27 MICRON/50 MICRO INCH MIN GOLD PLATING

- E. WIRE LEADS: 26 AWG STRANDED WIRE
- 2. MECHANICAL:
 - A. TOTAL MATING FORCE: 750 GRAMS FOR 6 WIRES LEAD
 - B. RETENTION: 17 LBS BETWEEN JACK AND PLUG
 - C. CRIMP TENSILE STRENGTH: 4.0-500 LBS
- 3. ELECTRICAL:
 - A. CURRENT RATING: 1.5 AMP MAX
 - B. DIELECTRIC WITHSTANDING VOLTAGE: 1,000 VOLTS RMS, 60 Hz
 - C. CONTACT RESISTANCE: < 20 MILLIOHMS D. INSULATION RESISTANCE: > 10 MEGAOHMS

WI	KIN	G	DIA	GRAM

WINTER DIVIOLOUM		
JACK	WIRE COLOR	
POSITION	6 COND.	
1	WHITE	
2	BLACK	
3	RED	
4	GREEN	
5	YELLOW	
6	BLUE	

)US FILE NO. 125268

WA	WALL PLATE, TELEPHONE, 6P6C					
ITEM NO.	IC630DB6XX	REV. B				
DWG NO.	PS630DB600	PAGE NO.	2			



 $\texttt{CUSTOMER CARE / TECHNICAL SUPPORT * CSR@ICC.COM / 888-ASK-4-ICC (275-4422) * 2100 E. Valencia Dr, Suite D, Fullerton, CA 92831 * www.icc.com / Research Company (1998) and the support of the company (1998) and the company (199$