

CTP-TV529AB50

HD OVER COAX & UTP

**AIB-IR™
(Auto Intensity & Brightness)**

Equipped with eight AIB-IR™ Auto Intensity & Brightness control, this feature not only has Smart IR™ control (brightness), but also it controls the IR intensity depends on focal length of the variable lens. This will prevent over exposure of IR light on the images and IR halo effects commonly seen on conventional IR cameras.


Optional 5-50mm Megapixel Lens

Optional 5-50mm Megapixel Lens allow users to install on wide variety areas and environment.


Heater & Thermostat Module


Camera has on-board heater & thermostat module which allows continuous operation on temperature below -22 degrees in Fahrenheit.


Optional IDP™ Isolation Dual Power

Our patent pending IDP™ Isolation power will provide power to the camera more efficiently and safely by protecting the camera from surge, ground noise, and etc. (Available on DC12V/24VAC models only)

Patent Design 5-Axis Bracket



5-Axis bracket will make installation much easier. This patented bracket can be pointing angel past 180 degree. Even roof top mounting is possible with this bullet camera.


Dual HD Video Output

Both EX-SDI/HD-SDI and HD-TVI output provide Full HD @ 30fps real-time video simultaneously. This feature allows to connect up to 2 High Definition DVR's or 1 Live High Definition TV/Monitor at the same time.

DIMENSION

* Unit : mm (Inch)

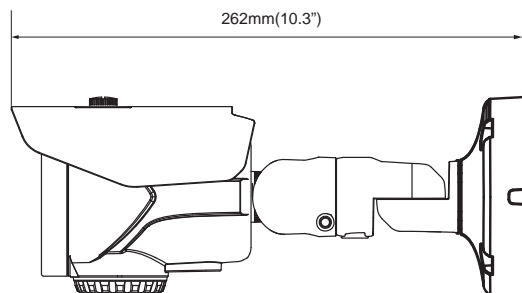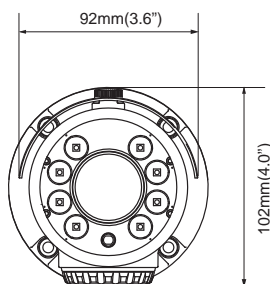

* Unit : mm (Inch)

SPECIFICATION

DESCRIPTION	NTSC	PAL
IMAGE SENSOR	1/2.9" 2.4MEGAPIXEL SONY EXMOR CMOS	
EFFECTIVE PIXEL	1920 (H) × 1080 (V) = 2.4M	
SCANNING SYSTEM	PROGRESSIVE	
SYNCHRONIZATION	INTERNAL	
HORIZONTAL RESOLUTION	1080P HD	
VIDEO OUTPUT	HD-TVI, EX-SDI/HD-SDI, CVBS (OSD SELECTABLE)	
S/N (Y SIGNAL)	MORE THAN 52dB	
MIN. ILLUMINATION	0.02Lux (SENS-UP X32)	
IRIS ADJUSTMENT	ALC / ELC	
LENS	2.8~12mm / 6~50mm MP DC AUTO IRIS VARIFOCAL LENS (ICR)	
ELECTRONIC SHUTTER	AUTO (1/30~1/60,000)	AUTO (1/25~1/60,000) FLK
OSD LANGUAGE	ENG / CHN / CHN[S] / JPN / KOR	
BACKLIGHT COMPENSATION	OFF / HLC / BLC / WDR	
DAY & NIGHT	COLOR / BW / EXTERN / AUTO	
WDR	OFF / LOW / MIDDLE / HIGH	
AUTO GAIN CONTROL	LEVEL (0~20) ADJUSTMENT	
WHITE BALANCE	AUTO / AUTODEXT / PRESET / MANUAL	
PRIVACY MASKING	ON / OFF (PROGRAMMABLE 16 ZONES)	
DNR	OFF / LOW / MIDDLE / HIGH	
SMART IR (ANTI-SAT)	ANTI-SET (0~20) ADJUSTMENT	
LSC	ON / OFF	
GAMMA	0.45 / 0.5 / 0.55 / 0.6 / 0.65	
DEFOG	ON / OFF	
DIGITAL ZOOM	ON / OFF (X1 ~ X8.0)	
DEAD PIXEL COMPENSATION	LIVE DPC / DPC SET	
SENS-UP	OFF / X2~X32	
MOTION	4 AREA	
DIGITAL EFFECT	OFF / V-FLIP / MIRROR / ROTATE	
COMMUNICATION	UTC	
IR LED	AIB-IR™ : 8PCS	
INPUT VOLTAGE	DC 12V / AC 24V DUAL VOLTAGE (OPTIONAL)	
POWER CONSUMPTION	DC IR OFF : 210mA (MAX) / DC IR ON : 650mA (MAX) AC IR OFF : 200mA (MAX) / AC IR ON : 550mA (MAX)	
OPERATING TEMP. / HUM.	-30°C ~ 50°C (-22°F ~ 122°F) / MAX 90% RH	
STORAGE TEMP. / HUM.	-20°C ~ +60°C / MAX 90% RH	