VertiLine33TD
Rack Mount DC Power Supply

Rev. DSVertiLine33TD_08062015

VertiLine33TD

Overview

Vertiline33TD Rack Mount DC Power Supply provides sixteen (16) filtered and electronically regulated power outputs in a space saving 1U EIA 19” rack mount chassis. Vertiline Rack Mount Power Supplies are also available in 24VDC and eight (8) outputs configurations.

Specifications

Input:
- 115VAC 60 Hz, 3 amp input.

Output:
- 12VDC outputs rated @ 16 amp total current max. *(1.0 amp per device, 2.5 amp max.).*
- Sixteen (16) PTC protected power outputs.
- Filtered and electronically regulated.

Electrical:
- Operating temperature: -20º C to 49º C ambient.
- 98.27 BTU/Hr.
- System AC input VA requirement: 345VA.

Features:
- Sixteen (16) power LEDs.

Features *(cont’d)*:
- Illuminated master power disconnect circuit breaker with manual reset.
- IEC 320 - 3-wire grounded line cord (detachable).
- Removable terminal blocks with locking screw flange.

Mechanical:
- Units can be rack, wall or shelf mounted.
- Modular 1U standard EIA 19” rack mount chassis.
- Enclosure Dimensions (H x W x D approx.): 1.625” x 19.125” x 8.5” (41.3mm x 486mm x 216mm).
- Product weight (approx.): 7.95 lbs. (3.61 kg).
- Shipping weight (approx.): 9.05 lbs. (4.11 kg).

Agency Approvals

CE European Conformity

Enclosure Dimensions *(H x W x D approximate)*:
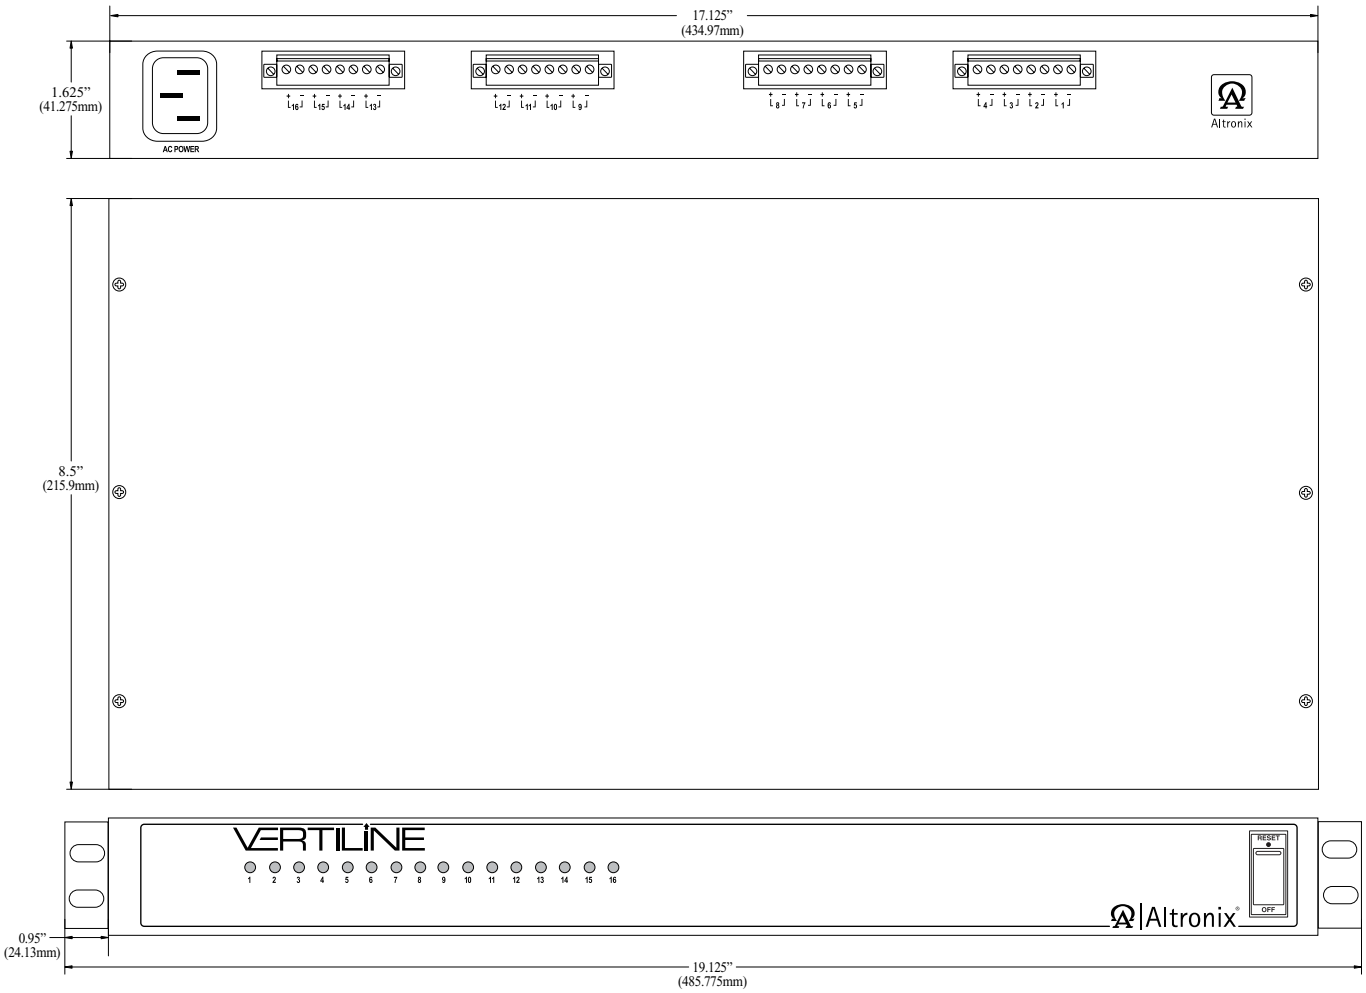
1.625” x 19.125” x 8.5” (41.3mm x 486mm x 216mm)