

LTC 9305 Series Indoor Housings



- Rugged cast aluminum construction equivalent to 10 gauge steel
- ► Ceiling or wall mounted Installation
- Scratch-resistant polycarbonate window, easily replaceable
- ► Adjustable camera mounting system
- Attractive styling


The LTC 9305 Series are wall or ceiling mounted detention grade security housings designed for applications such as prisons, parking garages, and hospitals. These housings are ideal for applications requiring secure CCTV monitoring.

For maximum protection and durability, the lightweight cast aluminum design of the LTC 9305 Series housings provide the strength of 10 gauge steel with the superior strength-to-weight ratio of aluminum. The viewing window, constructed of 9.5 mm (0.37 in) clear polycarbonate material, treated with a scratch resistant coating, can be easily replaced. The removable cover provides access to the camera and is secured by a tamper-resistant screw. A special tool is provided for screw removal.

Attractively styled, these housings are designed to be mounted on the ceiling, on the wall horizontally, or on the wall vertically. A key lock on the access panel is available.

These housings will accept all 1/4-inch, 1/3-inch, and 1/2-inch format CCD cameras with fixed format lenses.

Installation/Configuration Notes

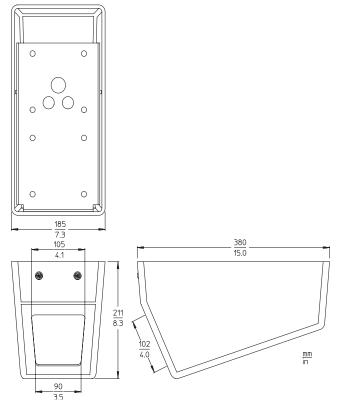

| Technical Specifications | | |
|-------------------------------------|---|--|
| Models | | |
| LTC 9305/00 | Clear 9.5 mm (0.37 in.) viewing window | |
| LTC 9305/01 | Key lock controlled access, 9.5 mm (0.37 in.) viewing window | |
| Mechanical | | |
| Dimensions | See drawing | |
| Color | Light gray | |
| Weight | 5.6 kg (12.3 lb) | |
| Mounting | 8 holes10 mm (0.41 in.) in top | |
| Cable entry | 1 x 21 mm (3/4 in.) knockout in top | |
| | $2 \times 13.5 \text{ mm}$ (1/2 in.) knockouts in top | |
| | Open cable entry through top also possible | |
| Camera mounting | Removable, 3-piece, fully adjustable system | |
| Max camera/lens size (H x W x D) | 76 x 76 x 300 mm (3 x 3 x 11.8 in.) | |
| Window | $9.5\mbox{mm}$ (0.37 in.) thick scratch-resistant polycarbonate | |
| Material | | |
| top panel | high strength steel | |
| cover | 6.3 mm (0.25 in.) cast aluminum | |
| Cover securement | 2 security screws | |

| Ordering Information | |
|---|------------|
| LTC 9305/00 Indoor Housing Max. security, wall or ceiling mount, 9.5 mm (0.37 inch) view window | LTC9305/00 |
| LTC 9305/01 Indoor Housing | LTC9305/01 |

Max. security, wall or ceiling mount, 9.5 mm (0.37 inch), view window, with key lock

Americas:
Bosch Security Systems, Inc.
130 Perinton Parkway
Fairport, New York, 14450, USA
Phone: +1 800 289 0096
Fax: +1 585 223 9180
security,sales@us.bosch.com
www.boschsecurity.us

Asia-Pacific: Rep Robert Bosch (SEA) Pte Ltd, Security Systems 11 Bishan Street 21 Singapore 573943 Phone: +65 6258 5511 Fax: +65 6571 2698 apr.securitysystems@bosch.com www.boschsecurity.com Represented by