


# PAM-4 Relay Module

www.boschsecurity.com



**BOSCH**  
Invented for life

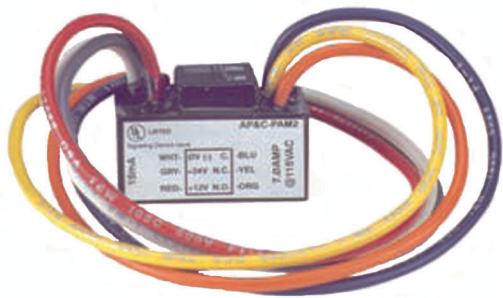

- One single pole, double throw (SPDT) dry contact Form C relay

The PAM-4 Relay Module provides one set of 10.0 A, Form C contacts. The relay can be energized across a wide voltage range from 9 VDC to 40 VDC, making it ideal for 12 VDC and 24 VDC EOL circuits or as an auxiliary relay for AC or DC loads. The 15 mA operating current is constant across the operating range. The input voltages are polarity-sensitive and diode-protected.

## Certifications and approvals

Apollo America (formerly Air Products and Controls Inc.) holds these Listings and Approvals:

Region	Certification	
USA	UL	UOXX: Control Unit Accessories, System (ANSI/UL 864); UOXX7: Control Unit Accessories, System Certified for Canada (ULC-S527)
	CSFM	see our website
	NYC-MEA	73-92-E, Vol. XXI

## Installation/configuration notes

### Mounting Considerations

The relay module is supplied with a piece of double-sided adhesive tape and a mounting screw to facilitate mounting. The mounting screw is required for UL installations.

### Wiring Considerations

The relay module has five 18 AWG (ISO 0.75 mm<sup>2</sup>) flying leads that are each 12 in. (304.8 mm) long. Wire nuts are provided.

## Parts included

Quant.	Component
1	Relay module
1	Mounting screw
1	Double-sided adhesive tape
6	Wire nuts
1	Literature – Installation Guide

## Technical specifications

### Electrical

Coil Voltage:	9 VDC to 40 VDC
Required Current:	15 mA
<b>Contact Ratings</b>	
• 5 VDC:	0.25 mA
• 24 VDC:	7 A
• 120 VAC:	10 A

### Environmental

Relative Humidity:	Up to 100%, condensing
Temperature (operating):	+32°F to +120°F (0°C to +40°C)

### Mechanical

Dimensions:	1.5 in. x 1.0 in. x 0.9 in. (38 mm x 25 mm x 23 mm)
-------------	--

## Ordering information

### PAM-4 Relay Module

One set of 10.0 A, Form C contacts that can be energized across a range from 9 VDC to 40 VDC  
Order number **PAM-4**

#### Represented by:

##### Americas:

Bosch Security Systems, Inc.  
130 Perinton Parkway  
Fairport, New York, 14450, USA  
Phone: +1 800 289 0096  
Fax: +1 585 223 9180  
security.sales@us.bosch.com  
www.boschsecurity.us

##### Europe, Middle East, Africa:

Bosch Security Systems B.V.  
P.O. Box 80002  
5617 BA Eindhoven, The Netherlands  
Phone: + 31 40 2577 284  
Fax: +31 40 2577 330  
emea.securitysystems@bosch.com  
www.boschsecurity.com

##### Asia-Pacific:

Robert Bosch (SEA) Pte Ltd, Security Systems  
11 Bishan Street 21  
Singapore 573943  
Phone: +65 6571 2808  
Fax: +65 6571 2699  
apr.securitysystems@bosch.com  
www.boschsecurity.asia

##### China:

Bosch (Shanghai) Security Systems Ltd.  
201 Building, No. 333 Fuquan Road  
North IBP  
Changning District, Shanghai  
200335 China  
Phone +86 21 22181111  
Fax: +86 21 22182398  
www.boschsecurity.com.cn

##### America Latina:

Robert Bosch Ltda Security Systems Division  
Via Anhanguera, Km 98  
CEP 13065-900  
Campinas, Sao Paulo, Brazil  
Phone: +55 19 2103 2860  
Fax: +55 19 2103 2862  
latam.boschsecurity@bosch.com  
www.boschsecurity.com