WELDEX CORPORATION
Original Equipment Manufacturer of CCD Cameras, DVR's & LCD Monitors

www.weldex.com / oem@weldex.com
Tel: (714) 761-2100 [USA]
Tel: (211) 600-7115 [GERMANY]

15" TFT LCD Flat Screen Monitor

WDL-1500M
WDL-1500CDM

MAIN FEATURES

- High Resolution 1024x768
- Thin Cross Section - Less than 2.5" Deep Panel
- 16.2 Million Colors for True Color Rendition
- Multiple Inputs - Composite Video, S-Video, D-Sub
- Audio (Right / Left) Line Inputs and Built-In Speaker
- Audio Outputs - Speaker / Earphone
- Contrast Ratio of 700:1
- Brightness of 250cd/m^2
- Wide Viewing Angle -110 Degrees (H) x 130 Degrees (V)
- On-Screen Menu Display for Feature and Video Adjustments
- Power Supply Included
- Includes Wireless Remote Control and PC Cable

WELDEX CAN CUSTOMIZE LCDS FOR YOUR SPECIFIC NEED!!

WDL-1500M / WDL-1500CDM (TFT LCD Flat Screen Monitor)

SYSTEM WIRING

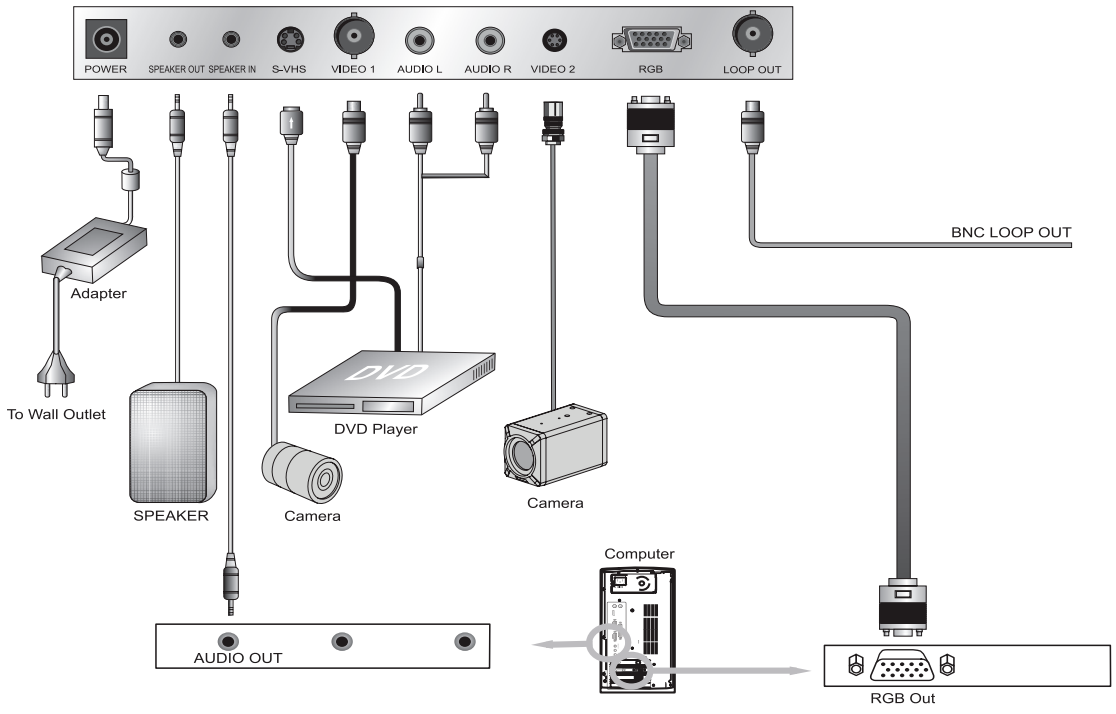

SPECIFICATIONS

MODEL	WDL-1500M / WDL-1500CDM
Display Type	Active Matrix Color TFT LCD
Screen Size	15" (Diagonal)
Viewable Size	304.1mm x 228.1mm
Viewing Angle	110 Degrees (H) x 130 Degrees (V)
Pixel Pitch(mm)	0.297(H) x 0.297(V)
Wall Mounting	YES
Brightness	250 cd/m2
Resolution	XGA(1024x768)
Display Color	16.2M Color
Pixel Format	RGB Vertical Stripe
Interface	Analog
Video Input	Analog R.G.B(0.7Vp-p), S-Video, BNC Composite(0.7Vp-p)
Contrast Ratio	700:1
AC/DC Adaptor	AC 100-240, 60/50Hz, DC12V/3.0A
Bult-in Speakers	With Speaker(2W x 2 Stereo)
Plug & Play Level	VESA DDC 1/2B
I/O Connector	DC Power In(DC 12V), VGA 15Pin D-Sub, Audio_L/R In & Speaker Out & Speaker In VIDEO 1/2, S-VHS, Rear gear signal, BNC Loop Out, External source signal(Option)
Option	WDRV - 7133A
System Type	NTSC / PAL / SECAM / AUTO
Power Requirements	36W, Saving Mode : 5W
Response Time	TR 3 / TF 13 (msec)
Video Source	Composite, S-VHS
Weight (Net)	10.1lbs
Size(WxDxH)	15.6" x 9" x 14.3"