

WDL-1900PVM-HD

19" HD Resolution (720p) Color Public View Monitor


- 19" LCD flat panel display
- High definition 2.4 megapixel camera
720p (1280 x 720 - video output)
- Adjustable camera allows for wasy installation
- Multi sampling technology optimizes the image to remain clear in various lighting conditions
- High dynamic range - 102 dB, max 120dB dynamic range
- IR remote control and on-screen display for easy setup and control
- All cables are concealed



Specification

LCD	Voltage range	AC100 ~ 240V
	Power at rated voltage	DC12V / 100W
	SYNC. format	NTSC / PAL
	LCD panel	TFT LCD
	Viewable picture area	19"
	Resolution (HxV)	1280 x 1024
	Display colors	Dual channel LVDs 16.7M colors
	Response time	Rising time: 3.6m sec. / falling time: 1.4m sec.
	Luminance	250cd/m ²
	Contrast ratio	1000:1
	Viewing angle	Up: 80°, down: 80°, right: 85°, left: 85°
	Operating temperature	0° C ~ +50° C
Storage temperature	-20° C ~ +60° C	
Camera	Imaging sensor	1/3" 2.4 megapixel SONY CMOS sensor
	Video output mode	720p (1280 x 720)
	Electronic shutter speed	NTSC: 1/60 ~ 1/120,000sec / PAL: 1/50 ~ 1/120,000
	Minimum illumination	0.5Lux (color), 0.1Lux (B/W), 0.02 (sens-up x 30)
	Day & night	Auto
	Adaptive color & contrast	Low / middle / high / off
	2D / 3D-NR	2DNR / 3DNR / smart NR
	Lens	3.6mm, 92 degrees viewing angle, F2.0 fix board lens
	AGC	Middle
	Motion detection	On / off selectable
	White balance	AWB
	Power source	DC12V 150mA
	Ambient temperature	-20° C ~ +50° C
Weight	5.4kg (gross weight)	

Dimension

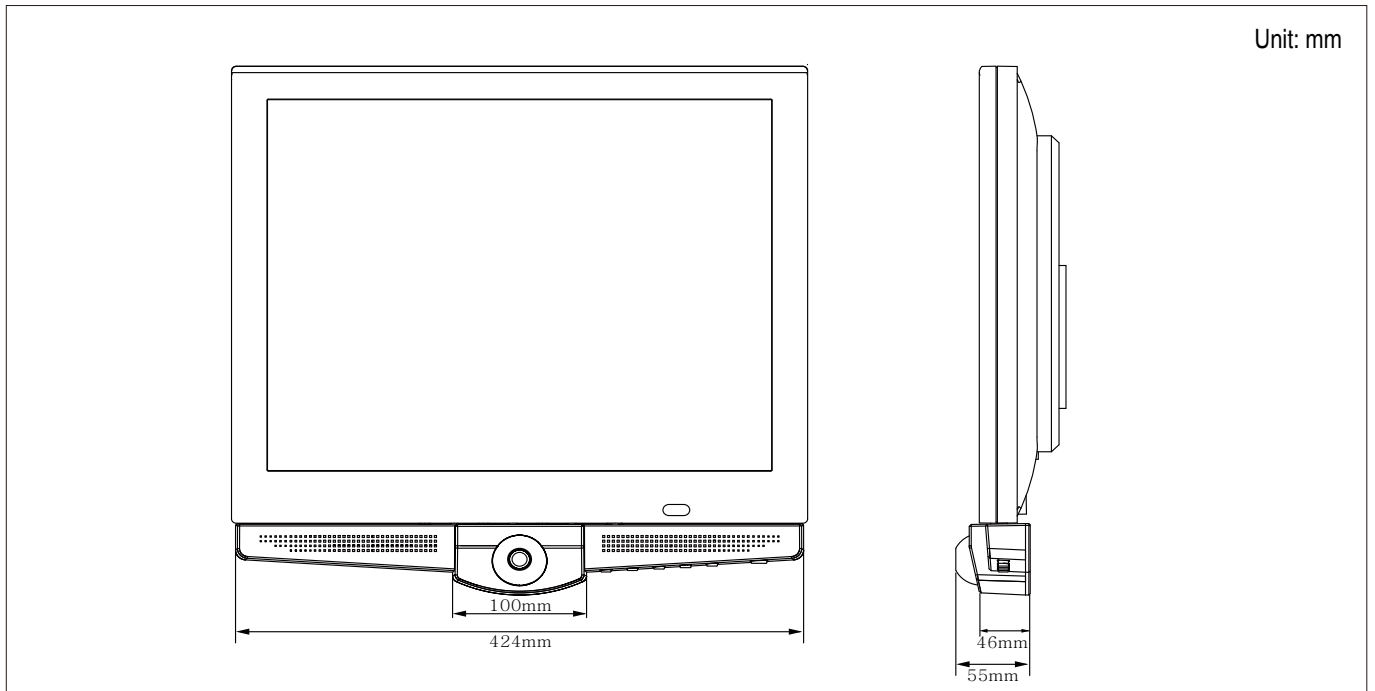

LCD 19" 250 (cd/m²) 1280 x 1024 100W 12V