

SP01-001 Dome Mount

Product Features

- International Hole Pattern
- For Use With Spectra®, DF5, and DF8 Series Pendant Domes (and Any Domes That Use 1.5-inch NTP Pipe)
- For Outdoor and Indoor Use
- Aluminum Construction, Gray Polyester Powder Coat
- Cable Feedthrough
- Supports Up To 40 Pounds (18 Kg)
- Easy To Install With Standard Tools

Description

The **SP01-001** dome mount is designed for outside and inside use with Spectra®, DF5, and DF8 domes, plus any other pendant dome that uses 1.5-inch (3.81 cm) NPT pipe. The mount attaches to rooftops and any flat horizontal surface. The flange was designed specifically for pole-top applications that use the 4.0-inch (10.16 cm) PCD (pitch circle diameter) mounting pattern commonly used in international applications. The **SP01-001** flange also has a 4.75-inch (12.0 cm) hole pattern that accommodates standard Pelco pedestal mounts. The **SP01-001** allows cable to be fed through the center of the tube to conceal wiring.



SP DISCLAIMER

SP products carry a 90-day warranty and are not returnable. SP products do not carry any agency certifications. Pelco strongly encourages installers to strictly follow local codes and regulations governing the installation of video security equipment and therefore assumes no liability for the installation of products depicted herein.

TECHNICAL SPECIFICATIONS

Construction	Aluminum
Finish	Light gray polyester powder coat
Suggested Mounting Method	Four 5/16-inch (7.94 mm) diameter fasteners (not included) are recommended
Maximum Load	40 lb (18 kg)
Weight	3.25 lb (1.47 kg)
Shipping Weight	9 lb (4 kg)

(Design and product specifications subject to change without notice.)

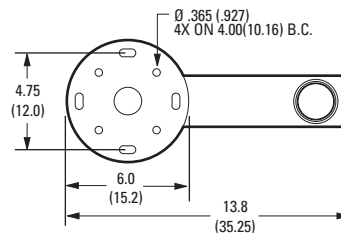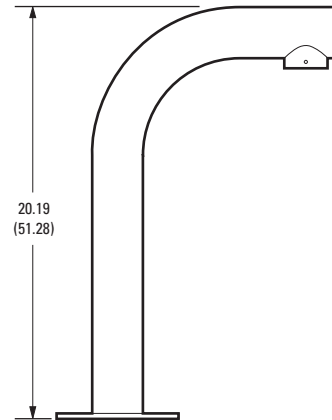

NOTE: VALUES IN PARENTHESES ARE CENTIMETERS; ALL OTHERS ARE INCHES.



Pelco Worldwide Headquarters:
 3500 Pelco Way, Clovis, California 93612-5699 USA
USA & Canada Tel: (800) 289-9100 • FAX (800) 289-9150
International Tel: (559) 292-1981 • FAX (559) 348-1120
www.pelco.com

Pelco, the Pelco logo, and Spectra are registered trademarks of Pelco. Specifications subject to change without notice. ©Copyright 2004, Pelco. All rights reserved.