

AC303-MB


HD720P Turbo HD Bullet Camera



Key features

- HD720P Video Output
- Adopt HDTVl Technology
- True Day/Night
- DNR, Smart IR
- 20m IR distance
- IP66 weatherproof

Dimensions

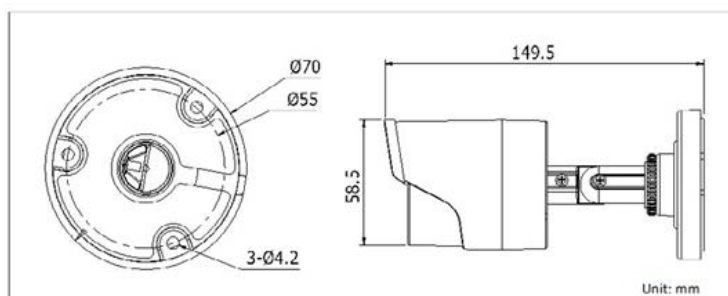

AC303-MB	
Camera	
Image Sensor	1/3" Progressive Scan CMOS
Effective Pixels	1280(H)*720(V)
Min. Illumination	0.01 Lux @(F1.2,AGC ON), 0 Lux with IR
Shutter Time	1/25(1/30) s to 1/50,000 s
Lens	3.6mm (2.8mm, 6mm optional)
	Angle of View: 76.88°(3.6mm), 99.73°(2.8mm), 50.1°(6mm)
Lens Mount	M12
Angle Adjustment	Pan: 0 - 360°, Tilt: 0 - 90°, Rotation: 0 - 360°
Day & Night	ICR
Synchronization	Internal synchronization
Video Frame Rate	25 fps (PAL) / 30 fps (NTSC)
HD Video Output	1 Analog HD output
S/N Ratio	More than 52dB
General	
Working Temperature/ Humidity	-40 °C - 60 °C (-40 °F - 140 °F) Humidity 90% or less (non-condensing)
Power Supply	12 VDC
Power Consumption	Max. 3.5W
Weather Proof Ratings	IP66
IR Range	Up to 20m
Dimensions	φ70 x 75 x 168.5 mm
Weight	360 g (0.79 lb)

Available models

AC303-MB

Winic Technologies USA Inc.

42 Central Avenue, Farmingdale, New York 11735

Tel: +631-396-0800

Fax: +631-396-0805

Email: sales@winictech.com

www.winictech.com

Design and specifications are subject to change without notice.