




D2L-GB2 2-Way Floor Distributor for GB2 System

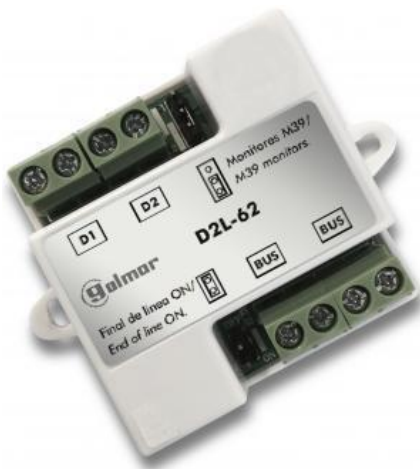

Architects' And Engineers' Specifications

The GB2 series 2-way floor distributors(s) shall be Alpha Communications® / Golmar D2L-GB2, or approved equal. The D2L-GB2 shall be used to connect up to two (2) of the GB2 series video monitors.

Contractor shall observe all local and national electrical and building codes.

D2L-GB2 2-Way Floor Distributor for GB2 System

The Alpha Communications® / Golmar D2L-GB2 2-Way Floor Distributor is used exclusively with the GB2 series systems. The D2L-GB2 allows connection of up to two (2) GB2 series monitors on a floor.

The optional model DP-GB2A can also be used as a floor splitter for up to four (4) monitors, instead of the D2L-GB2 2-way splitter(s).

Features

- Enclosed in a small box, perfect for retrofit
- 2 distributed outputs
- End of line resistor for line impedance balancing
- Uses simple 2-conductor non-polarized (loop) wiring

Specifications

Dimensions:	1.78"W (46mm) x 1.78"H (46mm) x 0.67"D (18mm).
--------------------	--

GB2 Wiring Information

The GB2's system uses simple 2-conductor non-polarized wiring making it ideal for new installations as well as for retrofit applications. All audio, video and data functions are fully digital and using the RAP-2150 (or equivalent) cable you can run up to 300 meters from the entrance panel to the furthest monitor.