



Key Features


- Controls from 1 ~255 cameras
- Multiple protocol supported in each channel
- RS-485 / RS-422 communication
- Programmable user preferences: (Preset, Tour, Pattern, Menu, and etc)
- Two control mode: manual and auto mode
- Full camera control: zoom, focus, iris, and etc.
- Built-in Full 3-axis proportional joystick
- User password support
- Numeric keypad for one-touch recall
- DC12V (max. 140mA)

DIMENSIONS


SPECIFICATIONS

Application

PTZ Multi Connection & Termination

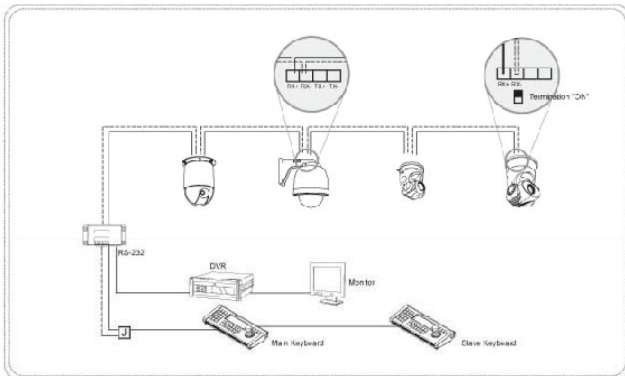

PTZ Connection with Master & Slave Controller

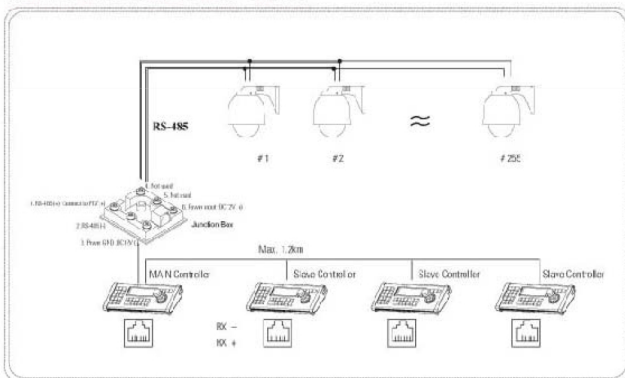

Model	PTC-KB1500
	Interface: RS-485 / RS-422
Keyboard Communication	Operating Distance: max. 7800ft (2.4km) on 24 AWG wire
	Protocol: Pelco-D, Pelco-P, Alec, Samsung, Vido-B01, Neon, HTSCAM, HD600, TOTA, Kalatel, Vclldome, Redapple, Santachi450, Vicon, and Etc. (Baud-rate selectable)
	Baud Rate: 1200, 2400, 4800, 9600, and 19200 bps
Connector Type Data	Terminal Block (8p)
Keyboard Button	Numeric keypad and camera function keys
Joystick	Full 3-axis, variable speed with zoom
LCD Display	Graphic text display: 16 character x2 lines
Input Voltage	DC12V or 9V battery
Power Consumption	Max. 140mA (DC12V)
Operating Temperature	0°C ~ 45°C
Humidity	10% ~ 70% Non-condensing
Dimension	280(W) x 100.08(H) x 179.53(D) mm
Weight	Net: 0.7kg (1.54lbs) / Gross: 1.7kg (3.75lbs)