


Leading the Way in Megapixel Video™

MicroDome® Series Accessories

Accessories for MicroDome and MicroDome G2 Indoor/Outdoor Ceiling, Wall, and Corner Mounting Solutions



Ceiling Mount Configuration




MicroDome Series Surface Mount Camera

Wall Mount Configuration



MicroDome Series Surface Mount Camera (Sold Separately)

Corner Mount Configuration




4S Electrical Box



Electrical Box Configuration

MCD-4S*

Wall Mount Configuration with Pole Mount Adapter



Wall Mount Configuration with Corner Mount Adapter MCD-WMT

Compatible Cameras



MicroDome® Series Surface Mount (-S) Domes

^{*} MCD-4S will not work with the MicroDomes IR models

MCD-CMT

C (NT) IIS

Pendant Mount with Built-In Junction Box Adapter



Features:


- · Easy Installation and Superior Design
- · Heavy Duty Enclosure Protection for Applications in Harsh Environments
- · Die-Cast Aluminum is Resistant to Impact and Salt Damage

Compatibility

| Compatible with 1/2" NPT standard | |
|---|--|
| Works with MicroDome® Series surface mount domes (-S) | |

Mechanical

| Casing | Die-cast aluminum | | |
|------------|------------------------------------|--|--|
| | IP66 weather proof standard | | |
| | IK-10 impact-resistant | | |
| Color | Ivory (Pantone® Cool Gray 1C) | | |
| Dimensions | See dimensional drawings below | | |
| Weight | w/o Camera 0.46lbs (0.21kg) | | |



MCD-WMT



Wall Mount with Built-In Junction Box Adapter

Features:




- · Easy Installation and Superior Design
- · Heavy Duty Enclosure Protection for Applications in Harsh Environments
- · Die-Cast Aluminum is Resistant to Impact and Salt Damage


Compatibility

| Compatible with 1/2" NPT standard | |
|---|--|
| Works with MicroDome® Series surface mount domes (-S) | |

Mechanical

| Casing | Die-cast aluminum | | |
|------------|------------------------------------|--|--|
| | IP66 weather proof standard | | |
| | IK-10 impact-resistant | | |
| Color | Ivory (Pantone® Cool Gray 1C) | | |
| Dimensions | See dimensional drawings below | | |
| Weight | w/o Camera 0.54lbs (0.25kg) | | |







MCD-CRMT


Corner Mount




Features:

- · Easy Installation and Superior Design
- "No-Grip" Design
- · Heavy Duty Enclosure

| Compatibility | Works with MicroDome® Series (-S models only) | | |
|---------------|---|--------------------------------|-------------------|
| | | | |
| Mechanical | Casing | Die-cast alumir | num |
| | | IP66 weather p | roof standard |
| | | IK-10 impact-re | esistant |
| | Color | Ivory (Pantone® Cool Gray 1C) | |
| | Dimensions | See dimensional drawings below | |
| | Weight | w/o Camera | 0.37lbs (0.168kg) |

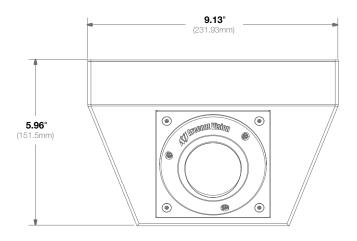



* MCD-4S will not work with the MicroDomes IR models

MCD-4S

Electrical Box Surface Mount Cover



Features:


- · Easily Install a MicroDome Surface Model Inside an Electrical Box
- · Heavy Duty Enclosure Protection for Applications in Harsh Environments
- · Die-Cast Aluminum is Resistant to Impact and Salt Damage


Compatibility


Works with MicroDome® Series surface mount domes (-S models only)* in conjunction with 3rd party 4-inch square box** 2-1/8 inch deep.

Mechanical

| Casing | Die-cast aluminum | | |
|------------|---|------------------|--|
| | IP66 weather proof standard | | |
| | IK-10 impact-resistant | | |
| Color | Ivory (Pantone® Cool Gray 1C) | | |
| Dimensions | 4.13" L (105mm) x 4.13" W (105mm) x 1.5" H (38mm) | | |
| Weight | w/o Camera | 0.18lbs (0.08kg) | |







Quick Installation:

Attach the MCD-4S Mount Cover to a 4-inch square box (user supplied) with the supplied hardware.





^{**} Verify fit as dimensions vary between manufactures

MCD-EBA

Electrical Box Adapter



Features:

- · Easy Installation and Superior Design
- · Heavy Duty Enclosure Protection for Applications in Harsh Environments
- · Die-Cast Aluminum is Resistant to Impact and Salt Damage

Compatibility

Works with MicroDome® Series (-S models only) and MicroBullet® Series

Mechanical

| Casing | Die-cast aluminum | | |
|------------|--------------------------------|------------------|--|
| | IP66 weather proof standard | | |
| | IK-10 impact-resistant | | |
| Color | Ivory (Pantone® Cool Gray 1C) | | |
| Dimensions | See dimensional drawings below | | |
| Weight | w/o Camera | 0.12lbs (0.05kg) | |





| Hole No. | Model Compatibility |
|----------|----------------------------------|
| 1 | MCD-WMT Box |
| 2 | MCD-WMT Arm |
| 3 | MicroDome -S |
| 4 | MicroBullet |
| 5 | Single Gang Box |
| 6 | Double Gang Box |
| 7 | 4S Box (4" Square, 4" Octagonal) |

Quick Installation:

- 1. Pass cables through the center hole of the adapter plate.
- 2. Attach the adapter plate to the electrical box (sold separately) using the appropriate hardware and mounting holes.
- 3. Attach the compatible part noted above.

MCD-JBAS

Square Junction Box Plate



Features:


- · Easy Installation and Superior Design
- · Heavy Duty Enclosure Protection for Applications in Harsh Environments
- · Die-Cast Aluminum is Resistant to Impact and Salt Damage

Compatibility

Works with MicroDome® Series (-S models only) Works with AV-.IBA

Mechanical

| Casing | Die-cast aluminum | | |
|------------|----------------------------------|--|--|
| | IP66 weather proof standard | | |
| | IK-10 impact-resistant | | |
| Color | Ivory (Pantone® Cool Gray 1C) | | |
| Dimensions | See dimensional drawings below | | |
| Weight | w/o Camera 0.27lbs (124g) | | |





Quick Installation:

- 1. Pass cables through the center hole of the adapter plate.
- 2. Attach MircoDome to MCD-JBAS adapter plate.
- 3. Attach the adapter plate to the AV-JBA junction box (sold separately) using the appropriate hardware and mounting holes.





AV-PMA

Pole Mount Adapter



Features:


- · Easy Installation and Superior Design
- · Heavy Duty Enclosure Protection for Applications in Harsh Environments
- Die-Cast Aluminum is Resistant to Impact and Salt Damage


Compatibility

Works with AV-WMJB, AV-SWMJB, MDD-WMT, MCD-WMT, and AV-JBA

Mechanical

| Casing | Die-cast alumin | ium | |
|------------|--------------------------------------|------------------|--|
| | IP66 weather proof standard | | |
| | IK-10 impact-resistant | | |
| Color | Ivory (Pantone® Cool Gray 1C) | | |
| Dimensions | 5.01" W (127.32mm) x 4.92" H (125mm) | | |
| Weight | w/o Camera | 0.32lbs (0.15kg) | |





AV-CRMA

Corner Mount Adapter





Features:


- Easy Installation and Superior Design
- · Heavy Duty Enclosure Protection for Applications in Harsh Environments
- Die-Cast Aluminum is Resistant to Impact and Salt Damage


Compatibility

Works with AV-WMJB, AV-SWMJB, MDD-WMT, MCD-WMT, and AV-JBA

Mechanical

| Casing | Die-cast aluminum | | |
|------------|---------------------------------------|------------------|--|
| | IP66 weather proof standard | | |
| | IK-10 impact-resistant | | |
| Color | Ivory (Pantone® Cool Gray 1C) | | |
| Dimensions | 13.04" W (331.25mm) x 4.92" H (125mm) | | |
| Weight | w/o Camera | 0.59lbs (0.27kg) | |









AV-JBA



Square Junction Box Adapter



Features:


- · Easy Installation and Superior Design
- · Heavy Duty Enclosure Protection for Applications in Harsh Environments
- Die-Cast Aluminum is Resistant to Impact and Salt Damage


Compatibility


| Compatible with 3/4" NPT standard | |
|---|--|
| Works with AV-PMJB***, AV-WMJB***, HSG2-WMT, MCD-JBAS, MCB-JBAS, and MegaView® 2*** | |

Mechanical

| Casing | Die-cast aluminum |
|------------|--|
| | IP66 weather proof standard |
| | IK-10 impact-resistant |
| Color | Ivory (Pantone® Cool Gray 1C) |
| Dimensions | 4.7" L (120mm) x 4.7" W (120mm) x 1.89" H (48.1mm) |
| Weight | w/o Camera 1.3lbs (0.63kg) |







© 2017 Arecont Vision®. All rights reserved. Arecont Vision, the Arecont Vision logo, MicroDome, and MegaView are registered trademarks of the company.





