

KBD100 Keyboard

SWITCHER CONTROL AND PROGRAMMING

Product Features

- Control and Program CM6700 and CM6800 Matrix Switchers
- Select Cameras and Monitors
- Operate Sequences
- Operate Auxiliaries
- Acknowledge Alarms




The **KBD100** keyboard is Pelco's most economical keyboard. It is used to program and operate CM6700 and CM6800 matrix switchers.

The rear of the keyboard has four DIP switches and an RJ-45 connector. The DIP switches are used to set the keyboard's address. Each keyboard in the system must have a different address. The RJ-45 connector is used to connect to either the CM6700 or the CM6800.

You can connect a single keyboard to the local keyboard port on the CM6700, or you can connect up to eight if using the remote keyboard port.

You can connect up to 16 **KBD100** keyboards to the CM6800.

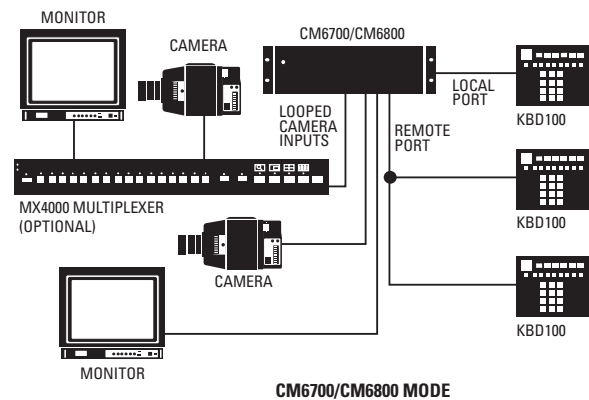

TECHNICAL SPECIFICATIONS

MODEL

KBD100 Desktop keyboard, switcher only

ELECTRICAL

Input Voltage 12 VAC or ± 12 VDC
Power Consumption 5 W
Connector Type RJ-45, 8-pin modular (female)
Keyboard Communication Interface RS-422
Protocol Pelco ASCII
Baud 9600
Communication Parameters 8 data bits, odd parity, 1 stop bit

GENERAL

Keyboard Keypad Electromechanical
Display Red LED, 7-segment, 2 cells
Dimensions 2.25" H x 6.00" W x 7.125" D
(5.72 x 15.24 x 18.10 cm)
Unit Weight 2.11 lb (0.96 kg)
Shipping Weight 4 lb (1.82 kg)

ENVIRONMENTAL

Operating Temperature 20° to 120°F (-7° to 49°C)
Humidity 10% to 90%, non-condensing

CERTIFICATIONS

- CE, Class A
- UL Listed
- UL Listed to Canadian safety standards
- FCC, Class A

SUPPLIED ACCESSORIES

25-foot (7.6 m) RJ-45 data cable

OPTIONAL ACCESSORIES

KBDKIT Remote keyboard wiring kit. Required if connecting KBD100 keyboards to the Remote Keyboard Port on the CM6700/CM6800. Includes two RJ-45 wall blocks and one 120 VAC to 12 VAC transformer. Maximum cable distance for RS-422 communication over 24-gauge wire is 4,000 feet (1,219 m). Use shielded twisted pairs cable that meets basic requirements for RS-422 applications. (One wall block and transformer required for each keyboard.)

KBDKIT-X Same as KBDKIT except includes 230 VAC to 12 VAC transformer.



Pelco, Inc. Worldwide Headquarters:
3500 Pelco Way, Clovis, California 93612-5699 USA
USA & Canada Tel: (800) 289-9100 • FAX: (800) 289-9150
International Tel: +1 (559) 292-1981 • FAX: +1 (559) 348-1120
www.pelco.com

Pelco and the Pelco logo are registered trademarks of Pelco, Inc.
Product specifications and availability subject to change without notice.
©Copyright 2003, Pelco, Inc. All rights reserved.