



**TLMC-PLASTIC BOX**



Plastic Back Box of AOP-SP and TLMC for flush mounting  
Dim: 8"H x 6.25"W x 2.75"D

**TLM-W BACKBOX**



Plastic Back Box for TLM-W  
Dim: 6.9"H x 5"W x 1.65"D

**AOPSP BACKBOX**



18 Ga Aluminum Back Box for AOP-SP and TLMC-W  
Dim: 8.12"H x 6.17"W x 4"D

**ERD-8**



Ceiling mount backbox for TLI-CF  
Dim: 12.25" Dia. x 4"D

**BR-4WS**



Ceiling Flush Speaker Grill Baffle for TLM-CF with 4" speaker  
Dim: 7.65" Dia.

**BR-8WS**



Ceiling Flush Speaker Grill Baffle for TLI-CF with 8" speaker  
Dim: 12.87" Dia.

**MR-4**




Mounting Ring for TLM-CS  
Dim: 7.38" Dia. x 3"D

**MR-8**



Mounting Ring for TLI-CS  
Dim: 12.38" Dia. x 3"D

**SSB-2**

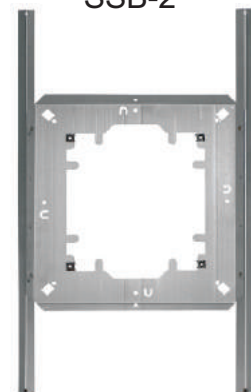

Support Bridge for TLI to prevent ceiling tile sag  
Dim: 23.75"H x 14.5"W

## VRSC



Square Surface Mount  
Vandal Resistant Baffle  
Dim: 11"H x 13"W x 4"D

## HHM-1020



Low Impedance Handheld Microphone  
600Ω

## HP-15-135-B



Stereo Headphone  
8Ω, 100mW, with 1/4" plug  
Volume control on each ear

## PTA-1



Portable Test Amplifier  
for use with DG-25III  
Dim: 3 1/8" W x 4 1/4" H x 1 1/2" D  
Weight: 5 oz

## SG-1



Portable Sound Generator  
for use with DG-25III  
Dim: 2 1/8" W x 3 1/2" H x 1 3/4" D  
Weight: 4 oz

## POWER SUPPLIES

### AD-1



Power Supply  
Input: 100~240 VAC 50/60 Hz 0.3A  
Output: +12 VDC, 500mA

### AD-3



Power Supply  
Input: 100~240 VAC 50/60 Hz 1.2A  
Output: +24 VDC, 1.5A

### AD-6PS



DG-12II and DG-25III Power Supply  
Input: 100~240 VAC 50/60 Hz 4.5A  
Output: +15 VDC, 12.3A

### AD-1U



Universal Power Supply  
Input: 100~240 VAC 50/60 Hz 0.3A  
Output: +12 VDC, 500mA

### AD-3U



Universal Power Supply  
100~240 VAC 50/60 Hz 0.8A  
+24 VDC, 1A