

Overview

Altronix VertiLine CCTV Rack Mount Power Supplies provide 24 power outputs in a space saving 1U EIA 19" rack mount chassis which may be rack, wall or shelf mounted. The units feature individually selectable 24VAC and/or 28VAC power outputs with surge suppression. VertiLine CCTV Rack Mount Power Supplies are also available in eight (8) and sixteen (16) output models with various power ratings.

VERTILINE[™]**Specifications****Input:**

- Selectable 115VAC 60 Hz/230VAC 50/60 Hz input.
 - 115VAC 60 Hz., 4 amp
 - 230VAC 50/60 Hz., 2.5 amp

Output:

- Twenty-four (24) individually selectable 24VAC or 28VAC power outputs with OFF position.
- 24VAC or 28VAC @ 14 amp total output current.
- Twenty-four (24) external blade fuse protected outputs rated @ 3 amp (VertiLine246).
- Twenty-four (24) PTC protected outputs rated @ 2.5 amp (VertiLine246D).
- Main fuse rated @ 15 amp.
- Surge suppression.

Visual Indicators:

- Twenty-four (24) individual power LEDs.

Features:

- Illuminated master power disconnect circuit breaker with manual reset.
- IEC 320 - 3-wire grounded line cord (detachable).
- Removable terminal blocks with locking screw flange.
- Spare fuses provided.
- Ease of installation saves time and eliminates costly labor.
- Compact 1U rack mount chassis.
- Fits standard EIA 19" rack.
- Units can be rack, wall or shelf mounted.

Shipping Weight (approximate):

- VertiLine246: 21.0 lbs.
- VertiLine246D: 21.0 lbs.

Models**VertiLine246**

CCTV Rack Mount Power Supply
w/twenty-four (24) fuse protected outputs.

VertiLine246D

CCTV Rack Mount Power Supply
w/twenty-four (24) PTC protected outputs.


Agency Approvals

UL Listed for Commercial CCTV Equipment
(UL 2044).

1U EIA 19" Rack Mount Chassis Mechanical Drawing & Dimensions:

1.625"H x 19.125"W x 8.5"D

REAR

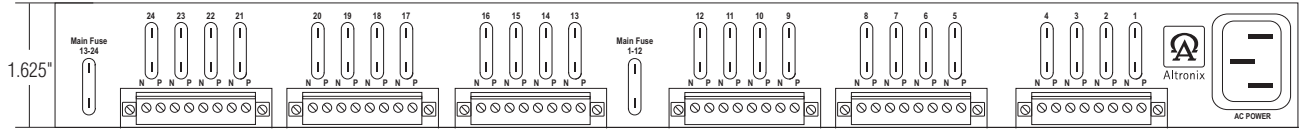

TOP & BOTTOM



FRONT

