

Overview

Altronix Vertiline CCTV Isolated Rack Mount Power Supplies provide 8 power outputs in a space saving 1U EIA 19" rack mount chassis which may be rack, wall or shelf mounted. The units feature individually selectable 24VAC and/or 28VAC power outputs with surge suppression. Vertiline CCTV Isolated Rack Mount Power Supplies are also available in sixteen (16) output models.

VERTILINE[™]

Specifications

Input:

- Selectable 115VAC 60 Hz/230VAC 50/60 Hz input.
 - 115VAC 60 Hz., 2.5 amp
 - 230VAC 50/60 Hz., 1.5 amp

Output:

- Eight (8) individually selectable 24VAC or 28VAC power outputs with OFF position.
- 24VAC or 28VAC @ 8 amp total output current.
- Individual electronically isolated outputs.
- Eight (8) external blade fuse protected outputs rated @ 3 amp (VertiLine8i).
- Eight (8) PTC protected outputs rated @ 2.5 amp (VertiLine8Di).

Visual Indicators:

- Eight (8) individual power LEDs.

Features:

- Illuminated master power disconnect circuit breaker with manual reset.
- IEC 320 - 3-wire grounded line cord (detachable).
- Removable terminal blocks with locking screw flange.
- Spare fuses provided.
- Ease of installation saves time and eliminates costly labor.
- Compact 1U rack mount chassis.
- Fits standard EIA 19" rack.
- Units can be rack, wall or shelf mounted.

Shipping Weight (approximate):

- VertiLine8i: 9.30 lbs.
- VertiLine8Di: 9.30 lbs.

Models

VertiLine8i

CCTV Isolated Rack Mount Power Supply
w/eight (8) fuse protected outputs.

VertiLine8Di

CCTV Isolated Rack Mount Power Supply
w/eight (8) PTC protected outputs.

Agency Approvals



UL Listed for Commercial CCTV Equipment
(UL 2044).




CUL Listed - CSA Standard C22.2 No.1-04,
Audio, Video and Similar Equipment.


1U EIA 19" Rack Mount Chassis Mechanical Drawing & Dimensions:

1.625"H x 19.125"W x 8.5"D

REAR

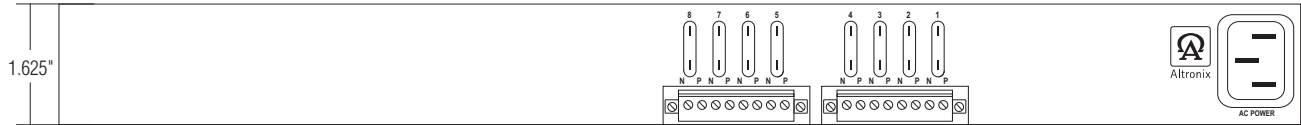

TOP & BOTTOM

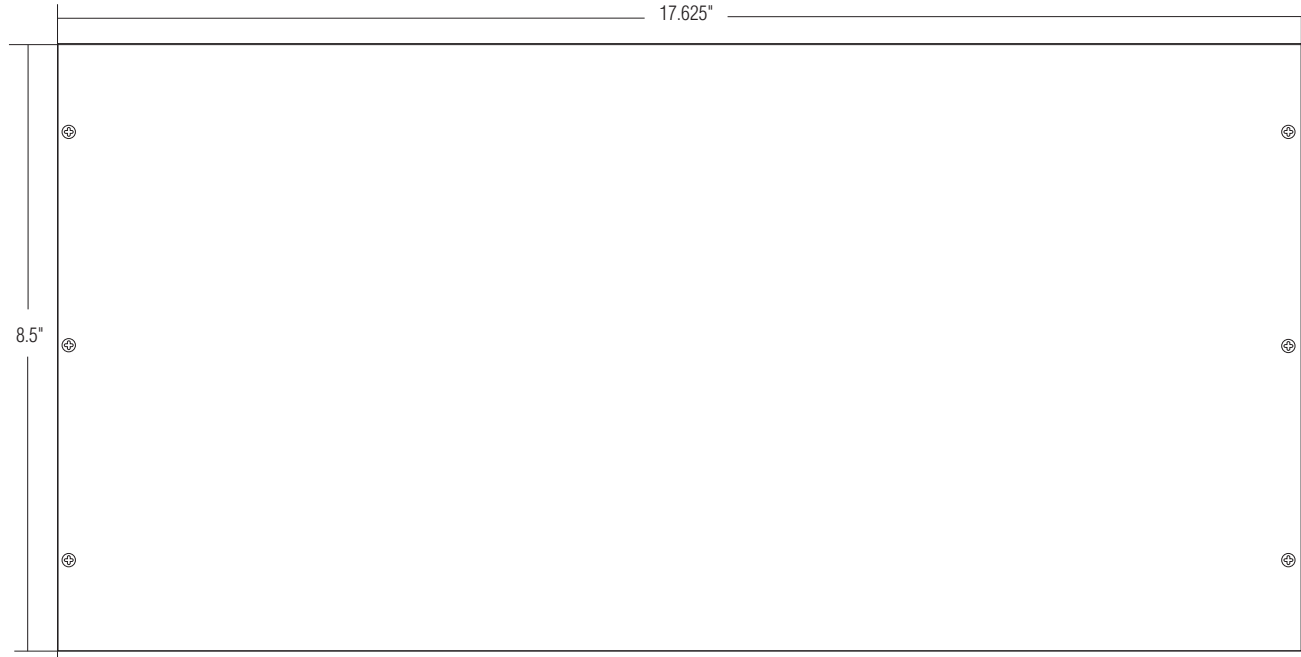

FRONT

