




Features

- 1/3" High Sensitivity CCD
- Ultra High Resolution (600 TV Lines)
- Built-in DC Iris Vari-focal Lens (f=3.8~9.5mm)
- DNR
- Min. Illumination : 0.05 Lux
- OSD, Auto White Balance
- AGC, SBLC, Flickerless
- Motion Detection, Privacy Zone, Mirror Function
- RS-485(Pelco-D, CNB) Interface
- 12VDC



DIMENSIONS

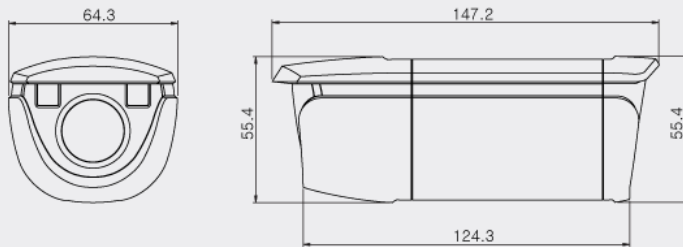

SPECIFICATIONS

Model	CBM-20VD
Signal System	NTSC
Scanning System	2:1 Interlace
Sync. System	Internal
Scanning Frequency (H)	15.734 kHz
Scanning Frequency (V)	59.94 kHz
Image Sensor	1/3 Inch High Sensitivity CCD
Total Pixels	811(H) x 508(V) 410K
Total / Effective Pixels	768(H) x 494(V) 380K
Horizontal Resolution	600 TV Lines (BW 650TVL)
Lens	Vari-focal Lens (f=3.8~9.5mm)
Video Output Level	1.0V p-p (75Ω, Composite)
S/N Ratio	More than 50dB (AGC Off)
Min. Illumination	0.05Lux (Color)
Digital Noise Reduction	Low, Middle, High, Off
White Balance	Auto / Manual / Push
SBLC	Off, Low, Middle, High
Flickerless	On / Off
OSD	English, Chinese
Mirror Function	Horizontal
Privacy Zone	On/Off (4 Programmable Zone)
Motion Detection	On/Off (4 Programmable Zone)
Shutter Speed	1/60~1/120,000 Sec.
Supplied Voltage	DC10V~15V (Recommendation DC12V±0.5V)
Power Consumption	Max. 2.2W / 150mA
Dimensions (WxHxD)	67.9(W) x 58.7(H) x 155.4(D) mm
Weight	Approx. 241g