


Category 6 Molded Boot Patch Cord 25 Pk

PRODUCT SPECIFICATION

Package includes:

A. CAT 6 Molded Boot Patch Cord, 25 pcs

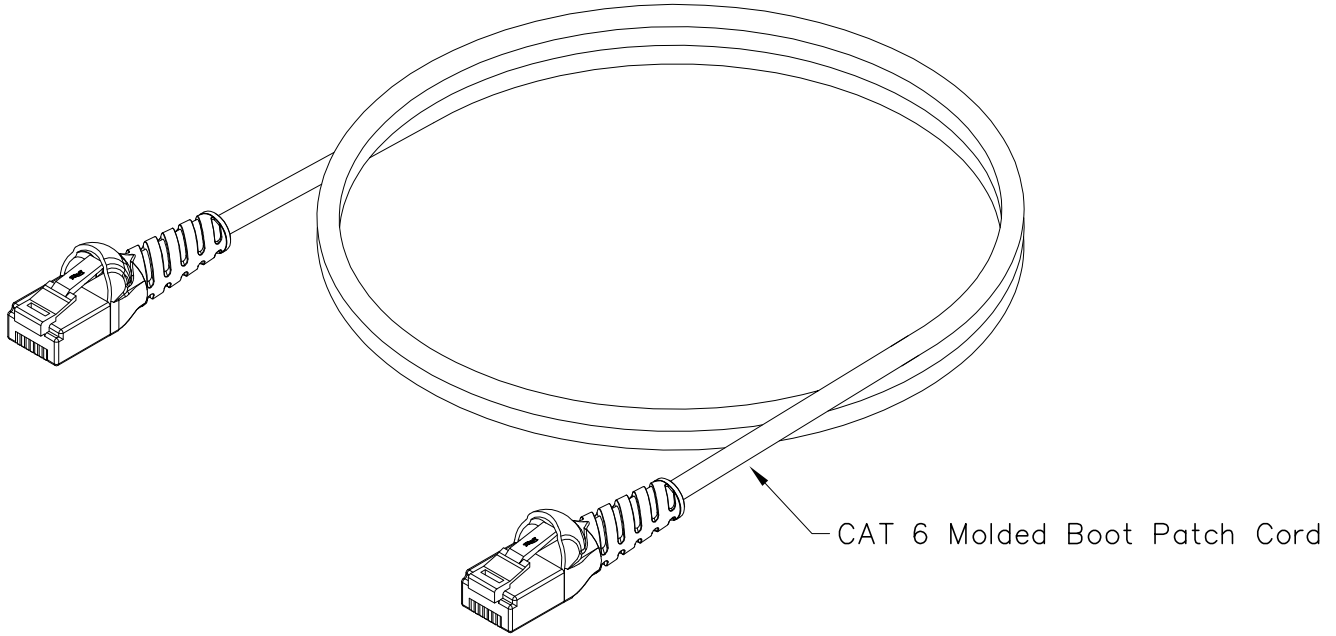

Features and Benefits:

- Performance, design, and value.
- 100 % Factory Tested , 50 Micro Inch Gold plated contacts .
- Component Rated and exceeds ANSI/TIA-568 connecting hardware requirements .
- Ultra Slim Low Profile boots for high density applications, no width wasted on boot.
- Backwards compatible to all lower rated category components.
- Constructed with Ultra Flexible, EZ release, Snag Free Molded Strain relief .
- Stranded 24 AWG copper wire (No substandard tinned copper materials used) .
- Safety: UL listed with 94V-0 rated plugs, CSA, CMG, FT4 Flame rated.
- Available in blue.
- Available in 5 lengths (1, 3, 5, 7, 10 ft).

PATCH CORD, CAT 6, MOLDED, 25 PK

ITEM NO. SEE DETAIL ON PAGE 2


REV. B

DWG NO. PSPCSD0000

PAGE NO. 1



CUSTOMER CARE / TECHNICAL SUPPORT * CSR@ICC.COM / 888-ASK-4-ICC (275-4422) * 14700 Alondra Blvd., La Mirada, CA 90638 * www.icc.com

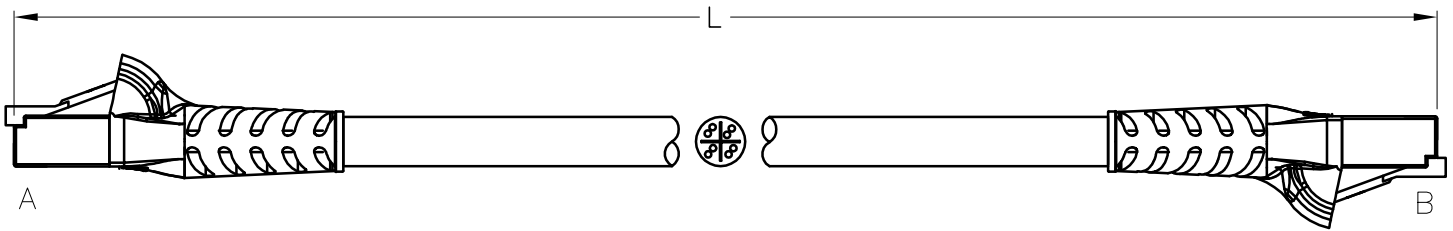

NOTE: UNLESS OTHERWISE SPECIFIED

1. ELECTRICAL/PHYSICAL:

A. CABLE:

- OPERATING TEMPERATURE -20°C TO 80°C
- VELOCITY OF PROPORATION NOM 67%
- CAPACITANCE, MUTUAL 14.5 PF/FT AT 1 MHZ
- DIELECTRIC WITHSTANDS, MIN 1500V RMS
- D.C. RESISTANCE, MAX 93.2 OHMS/KM @ 20°C
- IMPEDANCE, CHARACTERISTIC, NOM 100.0 OHMS
- ±15 @ 1 TO 100 MHZ
- ±20 @ 100 TO 350 MHZ

B. MODULAR PLUG:

- UL APPLICATIONS: 250 VOLTS MAX, AT 2 AMPS
- RESISTANCE OF INSULATION: 500 MEGOHMS
- RESISTANCE OF TERMINATION: 35 MILLIOHMS MAX @ -40°C TO 70°C
- DIELECTRIC WITHSTANDING VOLTAGE: 500 VOLTS AC

2. MATERIAL & FINISH:

A. CABLE: CATEGORY 6 PATCH CABLE

B. JACKET: MATERIAL: PVC

- OVERALL DIAMETER: 0.250" MAX
- AVERAGE THICKNESS: 0.020"

- INSULATION: MATERIAL: HIGH DENSITY POLYETHYLENE
- OVERALL DIAMETER: 0.038"
- AVERAGE THICKNESS: 0.007"

- CONDUCTOR: 24 AWG (7X32) UL RATED, BARE COPPER WIRE, STRANDED
- PERFORMANCE RATING: CATEGORY 6

C. MODULAR PLUG WITH LOADING BAR: UL AND cUL RECOGNIZED

- HOUSING: POLYCARBONATE, UL94V-0
- COLOR: CLEAR
- CONTACT: PHOSPHOR BRONZE, 0.014 INCH THICK
- GOLD PLATING: 1.27 MICRONS/50 MICRO INCH MIN ON CONTACTS
- NO. OF CONTACTS: 8

3. STRAIN RELIEF BOOT:

- A. MATERIAL: 60P PVC
- B. MARKING: ICC LOGO AT APPROXIMATE LOCATION SHOWN

4. MECHANICAL:

- A. CABLE-TO-PLUG TENSILE STRENGTH: 20 LBS [89N] MIN
- B. DURABILITY: 200 MATING CYCLES MIN

5. COLORS: XX: BL-BLUE, BK-BLACK, GN-GREEN, GY-GRAY, OR-ORANGE, RD-RED, WH-WHITE, YL-YELLOW

WIRING DIAGRAM		
PLUG A	PLUG B	COLOR
1	1	WHITE/ORANGE
2	2	*ORANGE
3	3	WHITE/GREEN
4	4	*BLUE
5	5	WHITE/BLUE
6	6	*GREEN
7	7	WHITE/BROWN
8	8	*BROWN

* A WHITE MARKING IS OPTIONAL

ITEM NO.	L(FT)	TOLERANCE(IN)
ICPCSD01XX	1	+1.5 -0
ICPCSD03XX	3	+1.5 -0
ICPCSD05XX	5	+2 -0
ICPCSD07XX	7	+2 -0
ICPCSD10XX	10	+3 -0

CATEGORY 6 CONNECTING HARDWARE REQUIREMENTS												
FREQUENCY (MHz)	1.0	4.0	8.0	10.0	16.0	20.0	25.0	31.25	62.5	100.0	200.0	250.0
NEXT LOSS (db)	75.0	75.0	75.0	74.0	69.9	68.0	66.0	64.1	58.1	54.0	48.0	46.0
FEXT LOSS (db)	75.0	71.1	65.0	63.1	59.0	57.1	55.1	53.2	47.2	43.1	37.1	35.1
RETURN LOSS (db)	30.0	30.0	30.0	30.0	30.0	30.0	30.0	30.0	28.1	24.0	18.0	16.0
INSERTION LOSS (db)	0.10	0.10	0.10	0.10	0.10	0.10	0.10	0.11	0.16	0.20	0.28	0.32

UL US FILE NO. 125268

PATCH CORD, CAT 6, MOLDED, 25 PK		
ITEM NO.	SEE DETAIL ABOVE	
DWG NO.	PSPCSD0000	REV. B PAGE NO. 2

CUSTOMER CARE / TECHNICAL SUPPORT * CSR@ICC.COM / 888-ASK-4-ICC (275-4422) * 14700 Alondra Blvd., La Mirada, CA 90638 * www.icc.com