

www.GESecurity.com

Overview

The Multi-Output Power Supply offers an easy to install power source for 4, 8, or 16 cameras. The system provides a perfect solution for multicamera installation where individual plug-in transformers are too numerous to be safe, convenient, and cost effective. The three isolated and fused output models support CyberDome® cameras.

Multi-Output Power Supplies

Centralized Indoor Power Supply for Multiple Cameras



Standard Features

- Five models, up to 400 VA, 120 VAC input
- Three 4 and 8 isolated output models
- Two 8 and 16 output, individually fused, models
- Isolated output models support CyberDomes
- All outputs individually fused
- Up to 2 amps per output at 24 VAC
- PTC protected outputs meet Class 2, power limited, requirements
- Locking door
- UL listed

Multi-Output Power Supplies

Centralized Indoor Power Supply for Multiple Cameras

Specifications

KTP-24-4I-200

- Input
 - Voltage: 120 VAC
 - Power: 200 VA
- Output
 - Voltage: 24 VAC
 - Power: 50 VA
- Weight: 13.5 lb (6 kg)
- Temperature: 14° to 122° F (-10 to 50°C)
- Humidity: 10 to 90 percent
- Dimensions: 12 in H x 12 in W x 4 in D (305 mm x 305 mm x 102 mm)

KTP-24-4I-400

- Input
 - Voltage: 120 VAC
 - Power: 400 VA
- Output
 - Voltage: 24 VAC
 - Power: 100 VA
- Weight: 18.5 lb (8.5 kg)
- Temperature: 14° to 122° F (-10° to 50° C)
- Humidity: 10 to 90 percent
- Dimensions: 12 in H x 12 in W x 4 in D (305 mm x 305 mm x 102 mm)

KTP-24-8I-400

- Input
 - Voltage: 120 VAC
 - Power: 400 VA
- Output
 - Voltage: 24 VAC
 - Power: 50 VA
- Weight: 19 lb (9 kg)
- Temperature: 14° to 122° F (-10° to 50° C)
- Humidity: 10 to 90 percent
- Dimensions: 12 in H x 12 in W x 4 in D (305 mm x 305 mm x 102 mm)


KTP-24-8-100

- Input
 - Voltage: 120 VAC
 - Power: 100 VA
- Output
 - Voltage: 24 VAC
 - Power: 12.5 VA
- Weight: 10.5 lb (5 kg)
- Temperature: 14° to 122° F (-10° to 50° C)
- Humidity: 10 to 90 percent
- Dimensions: 12 in H x 12 in W x 4 in D (305 mm x 305 mm x 102 mm)

KTP-24-16-200

- Input
 - Voltage: 120 VAC
 - Power: 200 VA
- Output
 - Voltage: 24 VAC
 - Power: 12.5 VA
- Weight: 13.5 lb (6 kg)
- Temperature: 14° to 122° F (-10° to 50° C)
- Humidity: 10 to 90 percent
- Dimensions: 12 in H x 12 in W x 4 in D (305 mm x 305 mm x 102 mm)

Related Diagram

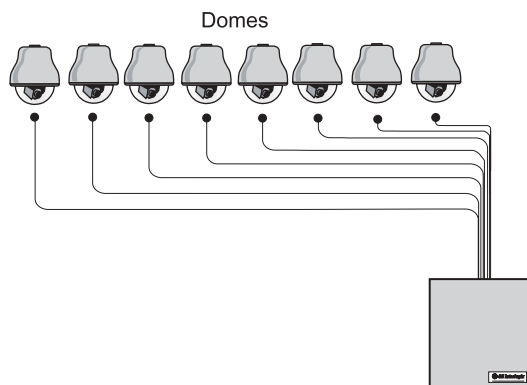

**For ordering information,
see the CyberDome Quick
Ordering Guide.**



Mailing Address
4575 Research Way, STE 250
Corvallis, OR 97333 USA

Americas
800-469-1676 (US only)
tel 541-754-9133

Asia
tel 852-2907-8108
fax 852-2142-5063

Europe
tel 32-2-725-11-20
fax 32-2-721-86-13

www.GESecurity.com

Australia
tel 61-3-9259-4700

Latin America
tel 305-593-4301