
1-Port Surface Mount Box w/6P6C Voice EZ Jack

PRODUCT SPECIFICATION

Package includes:

- A. Surface Mount Box Cover, 1 pc
- B. Surface Mount Box Base, 1 pc
- C. 6P6C Voice Jack, 1 pc
- D. Double Sided Adhesive Strip, 1 pc
- E. #6 x 3/4" Pan Head, Sharp Point Tapping Screw, 2 pcs

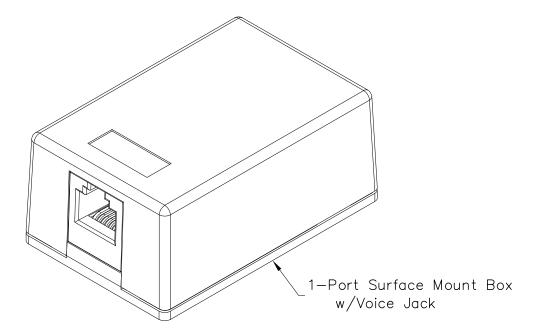



Features and Benefits:


- Provides a clean modular surface mount outlet solution of voice, data, and other communication needs to the work area for commercial or residential applications
- Multiple mounting options including adhesive backing and screws
- Recessed area for ID label
- Rugged and durable construction
- Available in ivory and white


| SURFAC | FCG | | |
|----------|------------|------------|----------------------------------------------------------------------|
| ITEM NO. | IC625SV1XX | REV. A | <u>PremiumProducts</u> |
| DWG NO. | PS625SV100 | PAGE NO. 1 | <u>Proven Performance</u> <u>Competitive Prices</u> |

CUSTOMER CARE / TECHNICAL SUPPORT * CSR@ICC.COM / 888-ASK-4-ICC (275-4422) * 14700 Alondra Blvd., La Mirada, CA 90638 * www.icc.com









NOTE: UNLESS OTHERWISE SPECIFIED

- 1. MATERIAL:
 - A. SURFACE MOUNT BOX: ABS, UL 94V-0
- B. VOICE MODULE: HIGH IMPACT, FLAME RETARDANT PLASTIC, UL 94V-0
- 2, COLOR; XX; IV-IVORY, WH-WHITE
- 3. RJ-11 VOICE MODULE:
 - A. ELECTRICAL:
 - -CURRENT RATING: 1.5 AMPS MAX
 - -VOLTAGE RATING: 150 VOLTS ALTERNATING
 - -DIELECTRIC WITHSTANDING VOLTAGE: 1000 VOLTS RMS, 60 HZ
 - -INSULATION RESISTANCE: > 10 MOHMS
 - B. MECHANICAL:
 - -MATED FORCE: 5 LBS MAX -UNMATED FORCE: 5 LBS MAX
 - -PLUG RETENTION FORCE: 20 LBS MIN
 - -DURABILITY: 750 CYCLES
 - C. PHYSICALS.
 - -HOUSING: HIGH IMPACT, FLAME RETARDANT PLASTIC, UL 94V-0
 - -CONTACT: PHOSPHOR BRONZE GOLD PLATING OVER 100 INCHES OF NICKEL
 - -GOLD PLATING: 1,27 MICRON/50 MICRO INCH MIN
 - -CONNECTOR: INSULATION DISPLACEMENT CONNECTOR (IDC)

ACCEPTS 22~24 AWG SOLID WIRE

| NEXT: (NEAR END CROSS TALK) | 1 MHz > 65 dB |
|--------------------------------|-------------------|
| (NEAR END CROSS TALK) | 10 MHz > 50 dB |
| | 16 MHz > 46 dB |
| | 20 MHz > 44 dB |
| INSERTION LOSS: | |
| | 10 MHz > 0.008 dB |
| | 16 MHz > 0.02 dB |
| | |

| SURFACE | MOUNT BOX, 6P6 | C, 1 VOICE EZ |
|----------|----------------|---------------|
| ITEM NO. | IC625SV1XX | REV. A |
| DWG NO. | PS625SV100 | PAGE NO. 2 |



CUSTOMER CARE / TECHNICAL SUPPORT * CSR@ICC.COM / 888-ASK-4-ICC (275-4422) * 14700 Alondra Blvd., La Mirada, CA 90638 * www.icc.com