


8P8C Keyed Surface Mount Jack With Shorting Bar

PRODUCT SPECIFICATION

Package includes:

- A. Surface Mount Jack Cover, 1 pc
- B. Surface Mount Jack Base, 1 pc
- C. Double Sided Adhesive Pad, 1 pc
- E. #6 x 3/4" Pan Head, Sharp Point Tapping Screw, 2 pcs

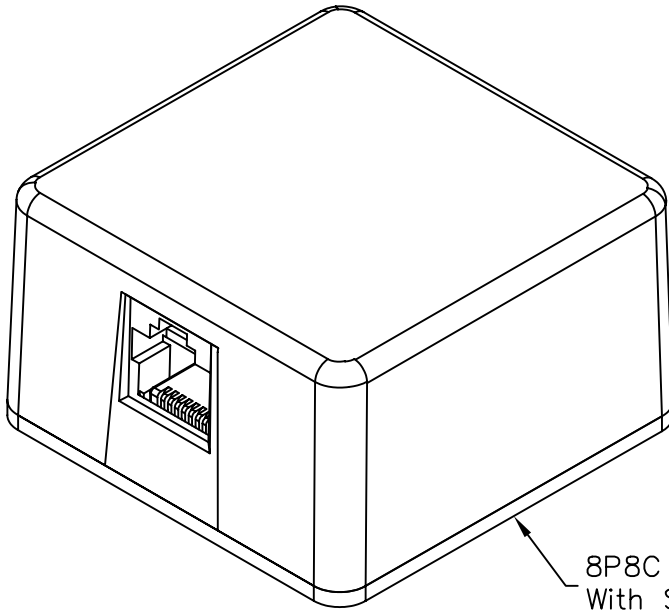




8P8C Keyed Surface Mount Jack
With Shorting Bar

Features and Benefits:

- Provides a clean modular surface mount outlet solution for voice connectivity applications
- Designed to support a multitude of high tech communication needs for residential or commercial applications
- Keyed RJ31X jack with shorting bar allows the alarm/security system to over ride line one
- Provided with traditional screw down terminals
- Multiple mounting options including adhesive backing and screws
- Rugged and durable construction
- Available in ivory and white
- UL listed


SURFACE MOUNT JACK, KEYED, 8P8C		 <i>PremiumProducts</i> <i>ProvenPerformance</i> <i>CompetitivePrices</i>	
ITEM NO.	IC635DS8XX		REV. A
DWG NO.	PS635DS800		PAGE NO. 1

CUSTOMER CARE / TECHNICAL SUPPORT * CSR@ICC.COM / 888-ASK-4-ICC (275-4422) * 14700 Alondra Blvd., La Mirada, CA 90638 * www.icc.com






WIRING DIAGRAM:

POSITION	WIRE COLOR
1	BLUE
2	ORANGE
3	BLACK
4	RED
5	GREEN
6	YELLOW
7	BROWN
8	GRAY



COVER

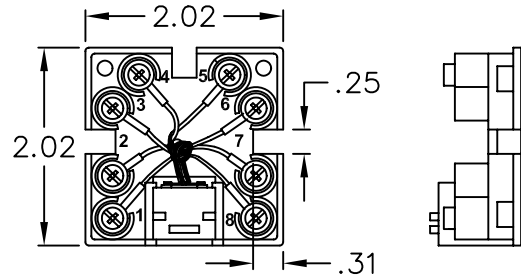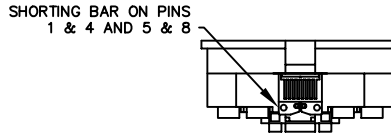

BASE

NOTE: UNLESS OTHERWISE SPECIFIED

1. MATERIAL:
 - A. SURFACE MOUNT JACK HOUSING: ABS, UL94V-0
 - B. SPRING WIRE CONTACTS: PHOSPHOR BRONZE GOLD PLATING
OVER 100 MICRO INCH NICKEL
 - C. GOLD PLATING: 1.27 MICRON/50 MICRO INCH MIN
 - D. WIRE LEADS: 26 AWG STRANDED WIRE
 - E. TERMINATION SCREWS: 15 LBS/INCH MIN TORQUE
ZINC CHROMATIC PLATED STEEL
 - F. TERMINAL LUGS: BRASS
2. COLOR: XX: IV-IVORY & WH-WHITE
3. MECHANICAL:
 - A. TOTAL MATING FORCE: 900 GRAMS
 - B. RETENTION: 17 LBS BETWEEN JACK AND PLUG
 - C. CRIMP TENSILE STRENGTH: 4.0-500 LBS
4. ELECTRICAL:
 - A. CURRENT RATING: 1.5 AMP MAX
 - B. DIELECTRIC WITHSTANDING VOLTAGE: 1,000 VOLTS RMS, 60 HZ
 - C. CONTACT RESISTANCE < 20 MILLIOHMS
 - D. INSULATION RESISTANCE > 10 MEGAOHMS

UL US FILE NO. 125268

SURFACE MOUNT JACK, KEYED, 8P8C		 Premium Products Proven Performance Competitive Prices	
ITEM NO.	IC635DS8XX		REV. A
DWG NO.	PS635DS800	PAGE NO.	2

CUSTOMER CARE / TECHNICAL SUPPORT * CSR@ICC.COM / 888-ASK-4-ICC (275-4422) * 14700 Alondra Blvd., La Mirada, CA 90638 * www.icc.com