



EasyNet™ Indoor Box EC-2M-F1N



Key Features

- 1/3" CCD Sensor
- 2MP (1080p)
- Day/Night Functionality with ICR
- Multiple Lens Adaptors: Supports both C/CS-Mount Types
- Digital Noise Reduction: DNR
- Auto Tracking White Balance: AWB
- 2.5 Lux (Color), 0.2 Lux (B/W)
- OSD Menu
- Built-in PoE
- 12VDC/24VAC Dual Voltage

Construction

- Aluminum Housing
- Built-in ICR filter

Technical Specification

EasyNet™ Indoor Box	EC-2M-F1N
Resolution	2MP (1080p)
Image Sensor	1/3" CMOS
Day/Night Functionality	Yes w/ ICR
Lens Type	C/CS Mount
Angle of View	N/A
Video Compression	H.264 / MJPEG
Frame Rate	30fps
Shutter Speed	1/30 ~ 1/20,000 sec.
Service Monitor Output	1.0 Vp-p Composite, 75 ohm
Minimum Illumination	2.5 Lux (Color), 0.2 Lux (B/W)
Composite Output	Yes
Micro SD Slot	Yes
Power Over Ethernet (PoE)	IEEE 802.3af compliant
Camera Control & Setup	OSD Menu
General Information	EC-2M-F1N
Operating Temperature	32°F ~ 113°F (0°C ~ +45°C)
Operating Humidity	Within 90% RH
Power Consumption	6W / 500mA
Input Voltage	12VDC / 24VAC Dual Voltage


*Specifications are subject to change without any prior notice.



With built-in ICR filter and versatile C/CS lens mounting capability, the new box camera is a true Day/Night camera with many application possibilities.

*IR-corrected lens is required.

Dimensions (Inch:mm)

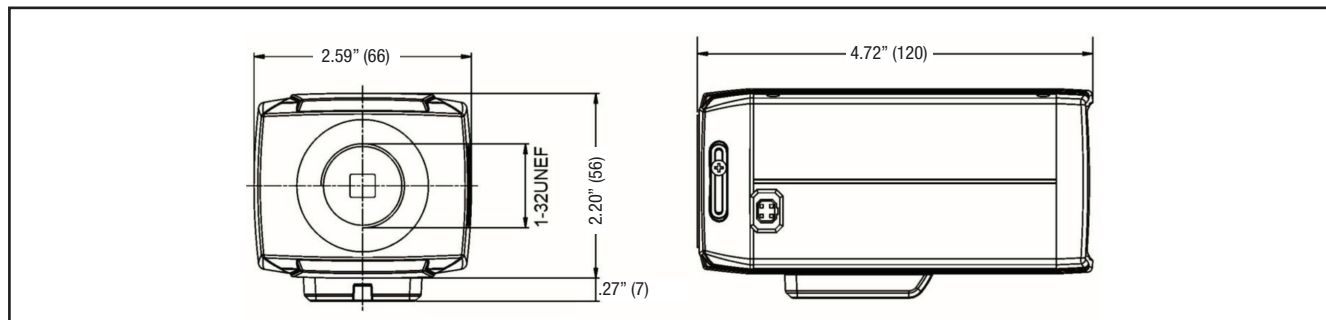

EC-2M-F1N