


GV-650 Video Capture Card



GV-650 D-Type PCI

GV-650 D-Type PCI-E

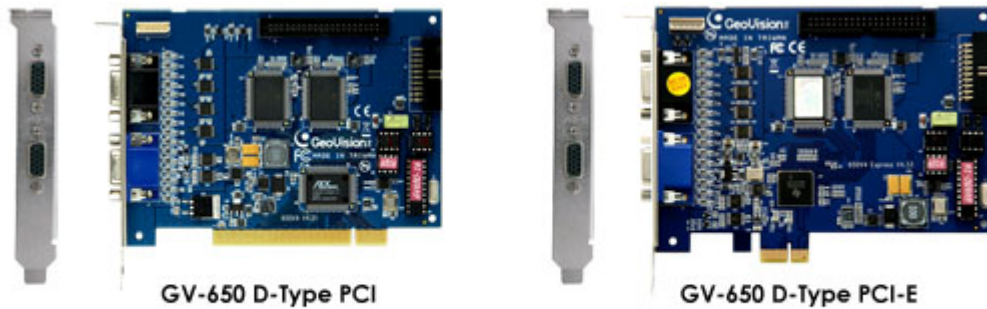

Specifications

| | |
|--|--|
| Input Type | D-Type: DB15 X 2 |
| Video Input(s) | 4, 8, 12, 16 Cams |
| Audio Input(s) | 2 Channels |
| Total Recording Rate At 320 X 240 Resolution / MPEG4 (ASP) | 60 fps (NTSC), 50 fps (PAL) |
| Display Rate | 60 fps (NTSC), 50 fps (PAL) |
| Video Resolution - NTSC/PAL | Full D1, Half D1, CIF |
| Video Compression Format | Geo MPEG4, Geo MPEG4 (ASP), Geo H264, Geo H264 V2 |
| Audio Compression Format | G.711 |
| GV-A16 Support | Yes |
| GV-NET Card Support | Yes |
| GV-NET/IO Card Support | Yes |
| Dimensions (W x H) | GV-650 D-Type(PCI & PCI-E) : 174 x 107 (mm) / 6.80 x 4.21 (in) |
| Installation Guide | Single Card & Two Cards |

Note: GV-650 is currently not compatible with VIA series and ATI series chipset motherboards.

Minimum System Requirements For One Card

| | | |
|--------------|--|--|
| OS Supported | 32-bit | Windows XP / Windows Vista / Windows 7 / Windows Server 2008 |
| | 64-bit | Windows 7 / Windows Server 2008 |
| CPU | Pentium 4, 2.4 GHz with Hyper-threading | |
| RAM | Windows XP: 2 x 512 MB Dual Channels Windows Vista / 7 /Server 2008: 2 x 1 GB Dual Channels | |
| HDD | 80 GB | |
| VGA | ATI Radeon X600 NVIDIA 6200 | |
| DirectX | 9.0c | |

Minimum System Requirements For Two Cards

| | | |
|--------------|---|--|
| OS Supported | 32-bit | Windows XP / Windows Vista / Windows 7 / Windows Server 2008 |
| | 64-bit | Windows 7 / Windows Server 2008 |
| CPU | Pentium 4, 2.8 GHz with Hyper-threading | |
| RAM | 2 x 1 GB Dual Channels | |
| HDD | 160 GB | |
| VGA | ATI Radeon X600 NVIDIA 6200 | |
| DirectX | 9.0c | |