



imageki

EE-D4030W-3.6


H.265 4Mp Network Vandal Dome Camera

Features:

- 4MP (2592×1520) H.265 full real time coding
- Max. resolution: 2592 × 1520
- ICR auto switch, true day / night
- 10 ~ 20m IR night view distance
- 3D DNR, physical WDR
- Support HLC, BLC and defogging
- ROI coding
- Support local CVBS video output and one-way audio
- Support hardware reset
- Support PoE power supply
- Support smart phone, iPad, remote monitoring
- Support P2P
- IP66 & IK10 ingress protection
- Support three streams



Dimensions:

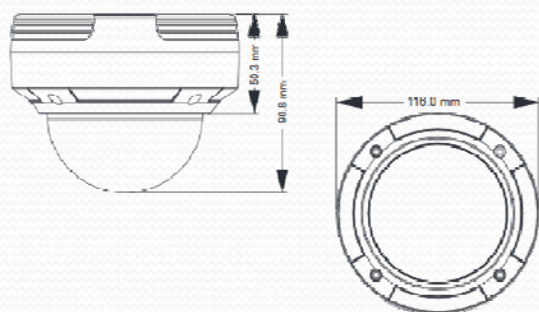

Specifications:

Camera	Image Sensor	1 / 3 "CMOS
	Image Size	2688 × 1520
	Electronic Shutter	1 / 25 s ~ 1 / 100000 s
	Min. Illumination	0.05 lux @F1.2, AGC ON; 0 lux with IR
	Lens	3.6mm Fixed Iris Lens
	Lens Mount	M12
	Day & Night	ICR
	WDR	Wide Dynamic Range 120dB
	BLC	Yes
	HLC	Yes
Image	Defogging	Yes
	Digital NR	2D / 3D DNR
	Angle Adjustment	Pan: 0°~240°, Tilt: 0°~68°, Rotation: 0°~220°
	Video Compression	H.265 / H.264 / MJPEG
	H.265 Standard	Main Profile @Leve4.1 High Tier
	Resolution	4MP (2592×1520), 2K (2560×1440), 3MP (2304×1296), 1080P (1920×1080), 720P (1280×720), D1, CIF, 480×240
	Main Stream	60Hz: 4MP (1 ~ 30fps) / 2K (1 ~ 30fps) / 3MP (1 ~ 30fps) / 1080P (1 ~ 30fps) / 720P (1 ~ 30fps) 50Hz: 4MP (1 ~ 25fps) / 2K (1 ~ 25fps) / 3MP (1 ~ 25fps) / 1080P (1 ~ 25fps) / 720P (1 ~ 25fps)
	Bit Rate	64 Kbps ~ 10 Mbps
	Bit Rate Type	VBR / CBR
	Quality	Five levels under VBR; Freely adjustable under CBR
Inter-faces	Image Setting	ROI, Saturation, Brightness, Chroma, Contrast, Wide Dynamic, Sharpen, NR, etc. adjustable through client software or web browser
	Audio Compression	G711A / U
	ROI	Each ROI to be configured separately
	Network	RJ45
	Audio	MIC IN × 1
	Video Output	CVBS video output (BN C × 1)
	Remote monitoring	IE browsing, CMS remote control
	Online Connection	Support simultaneous monitoring for up to 10 users; Support multi-stream real time transmission
	Network Protocol	TCP / IP, UDP, DHCP, NTP, RTSP, PPPoE, DDNS, SMTP, FT
	Interface Protocol	ONVIF, GB-T/28181-2011
Functions	Storage	Network remote storage
	Smart Alarm	Motion alarm
	PoE	Yes
	IR Distance	10 ~ 20 m
	Waterproof	IP66
	Power Supply	DC12V / PoE
	Power Consumption	< 2.5 W
	IR Consumption ON	< 4 W
	Operating Environment	- 20 °C ~ 50 °C, 10 % ~ 90 % humidity
	Weight	1.3lbs (605g)
Others	Dimensions	4.6" x 3.6" (116 × 91mm)

Design subject to change without notice.

imageki

300 E Route 17S, Mahwah, NJ 07430
(201)-368-9171 , cctv@ikegami.com