

**Overview**

Altronix Vertiline CCTV Rack Mount Power Supplies provide 16 power outputs in a space saving 1U EIA 19" rack mount chassis which may be rack, wall or shelf mounted. The units feature individually selectable 24VAC and/or 28VAC power outputs with surge suppression. Vertiline CCTV Rack Mount Power Supplies are also available in eight (8) and twenty-four (24) output models with various power ratings.

**VERTILINE**<sup>™</sup>**Specifications****Input:**

- Selectable 115VAC 60 Hz/230VAC 50/60 Hz input.
  - 115VAC 60 Hz., 4 amp
  - 230VAC 50/60 Hz., 2.5 amp

**Output:**

- Sixteen (16) individually selectable 24VAC or 28VAC power outputs with OFF position.
- 24VAC or 28VAC @ 14 amp total output current.
- Sixteen (16) external blade fuse protected outputs rated @ 3 amp (VertiLine166).
- Sixteen (16) PTC protected outputs rated @ 2.5 amp (VertiLine166D).
- Main fuse rated @ 15 amp.
- Surge suppression.

**Visual Indicators:**

- Sixteen (16) individual power LEDs.

**Features:**

- Illuminated master power disconnect circuit breaker with manual reset.
- IEC 320 - 3-wire grounded line cord (detachable).
- Removable terminal blocks with locking screw flange.
- Spare fuses provided.
- Ease of installation saves time and eliminates costly labor.
- Compact 1U rack mount chassis.
- Fits standard EIA 19" rack.
- Units can be rack, wall or shelf mounted.

**Shipping Weight (approximate):**

- VertiLine166: 15.4 lbs.
- VertiLine166D: 15.4 lbs.

**Models****VertiLine166**

CCTV Rack Mount Power Supply  
w/sixteen (16) fuse protected outputs.

**VertiLine166D**

CCTV Rack Mount Power Supply  
w/sixteen (16) PTC protected outputs.


**Agency Approvals**

UL Listed for Commercial CCTV Equipment  
(UL 2044).


# 1U EIA 19" Rack Mount Chassis Mechanical Drawing & Dimensions:

1.625"H x 19.125"W x 8.5"D

REAR

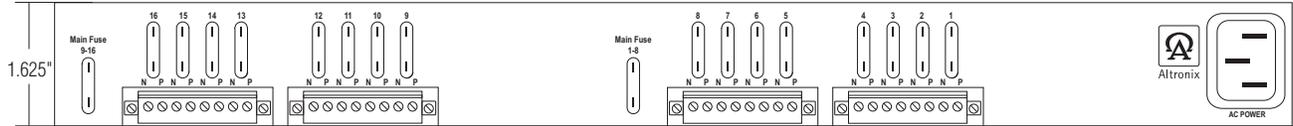

TOP & BOTTOM

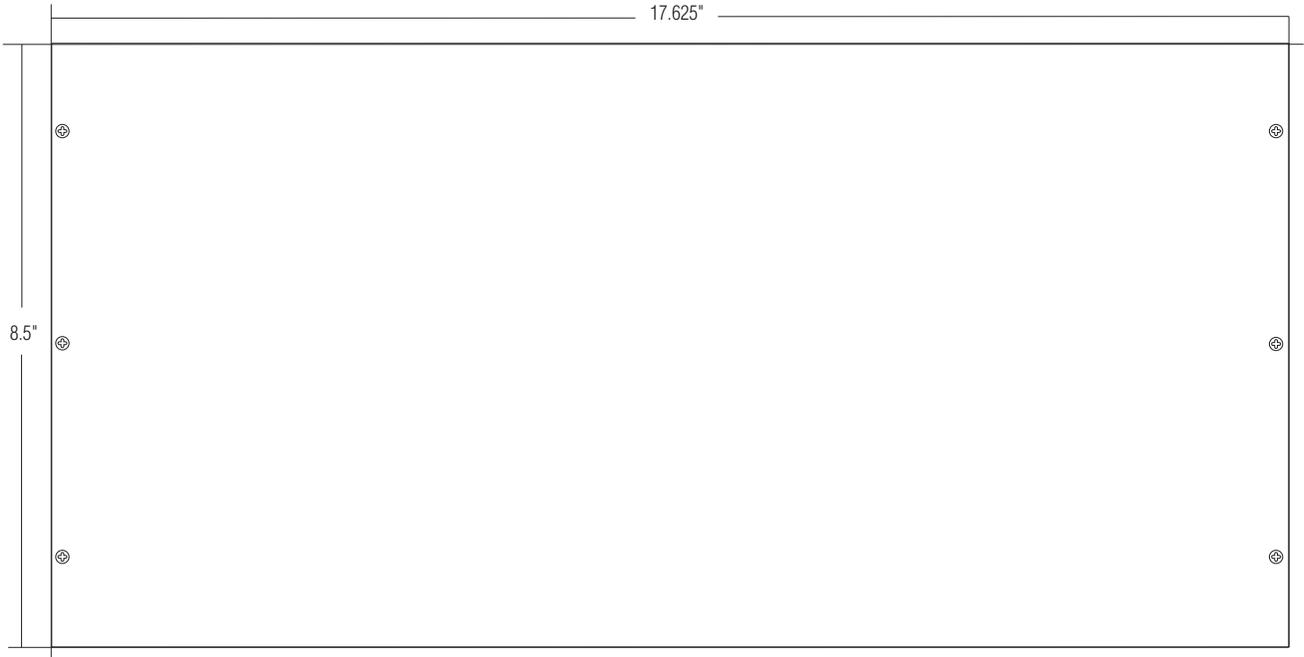

FRONT

