


W-95S RG59U

75 Ohm Siamese Cable, Series 59 , Standard shield,black PVC jacket

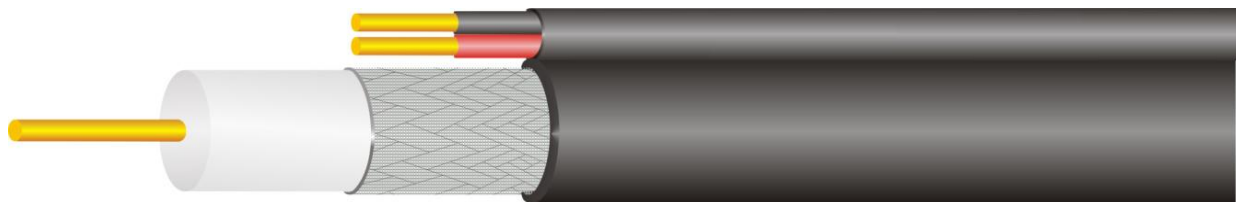

Constrution	Material	Diameter (mm)
Inner Conductor	Copper clad	0.81
Dielectric	Steel Foam PE	3.70
Braid	36AWG CCA wire Braid	86%
Jacket	PVC	6.1 ±0.2
Siamese Inner Conductor	CCA	7*0.38
Siamese Jacket	PE	1.8±0.1

Electrical Characteristics

Impedance	75±5.0 Ohms
Return Loss	
5-1000 MHz	≤20dB
1000-3000 MHz	≤15dB

Attenuation(20℃/(68 °F))

Frequency (MHz)	Norminal (db/100ft)
5	1.34
55	2.57
100	2.88
211	3.80
250	4.16
270	4.35
300	4.58
330	4.82
350	4.97
400	5.36
450	5.72
500	6.06
550	6.38
600	6.71
750	7.57
870	8.02
1000	8.86