




## PAR-ALLDRXIR28BD

5 Megapixel TVI/AHD/CVI/Analog Outdoor Dome with Internal Built-in Balun & BNC, 65' IR Range, D-WDR, Dual Voltage

### Features

- 5 Megapixel Resolution (TVI/AHD)  
4 Megapixel Resolution (CVI)
- All-in-One Technology (TVI/AHD/CVI/Analog 960h)
- Fixed Lens
- True Day/Night
- D-WDR
- 65' Smart IR Range
- Up The Cable (UTC) Function
- IK10 Vandal Resistant
- IP67 Weather Resistant
- Internal Built-in Balun and BNC, without Camera Leads
- Built-in 12vDC Output, 100mA Max
- Dual Voltage
- Through InVid Tech DVR: Free App, CMS & MAC Client

Camera	PAR-ALLDRXIR2812BD
Filter	Removable IR Cut Filter
Image Sensor	1/2.8" 5M Progressive Scan CMOS
Pixels	2688(H)×1944(V)
Horizontal Resolution	5MP
Minimum Lux	0 Lux (when 3pcs high power LED on)
Vertical Frequency	NTSC:60Hz PAL:50Hz
Scanning System	Progressive
S/N Ratio	≥50dB
Electronic Shutter	NTSC:1/60-1/60,000S PAL:1/50-1/50,000S
Lens	2.8mm IR Lens
White Balance	ATW
AUTO Gain Control	ON
DNR	OFF/ON
Day&Night	AUTO/Color/BW/Ext
Available IR Distance	65.6 ft
Video Output	TVI/AHD: 5MP 20 fps, 4MP @30 fps CVI: 4MP @30 fps CVBS
Video Output By Default	TVI
IP Rating	IP67 94.5-5.5 mm external wiring)
Housing	IK10
Power Supply	DC12V&AC24V
Current consumption	DC12V:400mA(MAX)/ AC24V:180mA(MAX)
Weight	1000g (35.28oz)
Dimension	4.49×3.22" (114×81.8mm)
Storage Temperature	-22°F ~ 140°F (-30°+60°C)
Operating Temperature	-22°F ~ 104°F (-30°+40°C)

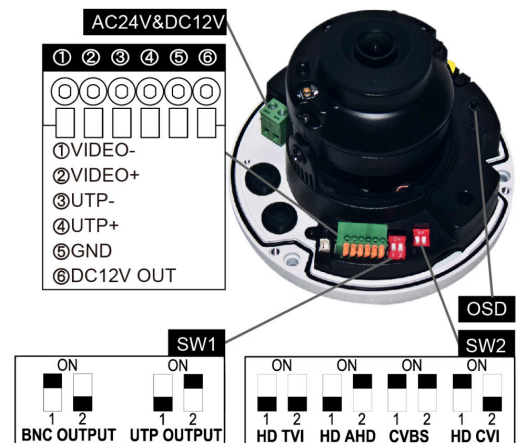

### Ordering Information

PAR-ALLDRXIR28BD: 5 Megapixel Dome, 2.8mm