



|                  |                                            |
|------------------|--------------------------------------------|
| <b>CVC61iLTB</b> | 3mm fixed lens, black housing              |
| <b>CVC61iLTW</b> | 3mm fixed lens, white housing              |
| <b>CVC62iLTB</b> | 4.3mm fixed lens, black housing            |
| <b>CVC62iLTW</b> | 4.3mm fixed lens, white housing            |
| <b>CILT00T6B</b> | 2.5mm wide-angle fixed lens, black housing |
| <b>CILT00T6W</b> | 2.5mm wide-angle fixed lens, white housing |

### Features


- 1/3" Sony Super-HAD™ CCD
- 600 TV lines of resolution
- Day/Night camera without using IR's
- Compact size - only 1.89" in diameter!
- Vandal resistant operation
- Cast aluminum construction
- Extreme low light functionality
- IP66 compliant
- 5 year warranty

### Specifications

|                               |                                   |
|-------------------------------|-----------------------------------|
| Image Sensor .....            | 1/3" Sony Super-HAD™ CCD          |
| Resolution.....               | 600 TV lines                      |
| Sensitivity .....             | 0.00001 lux                       |
| Effective Pixels .....        | 768 (H) x 494 (V)                 |
| Electronic Shutter Speed..... | Auto (1/60 sec. - 1/100,000 sec.) |
| Scanning System.....          | 2:1 interlace                     |
| Synchronization.....          | Internal                          |
| Video Output.....             | 1.0Vp-p / 75 Ohms                 |
| S/N Ratio .....               | More than 52dB (AGC Off)          |
| AGC.....                      | Auto                              |
| White Balance .....           | Auto                              |
| Sense-Up.....                 | Auto (x32)                        |
| Power Supply .....            | 12VDC (power supply not included) |
| Power Consumption .....       | 120mA max.                        |
| Operating Temperature.....    | -14° F – 120° F                   |
| Dimensions.....               | 1.46" (H) x 1.89" (Dia.)          |
| Weight .....                  | 4 oz.                             |



*Perfect for use in all vehicles or anywhere  
that a miniature, aesthetically pleasing,  
high resolution camera is desired.*

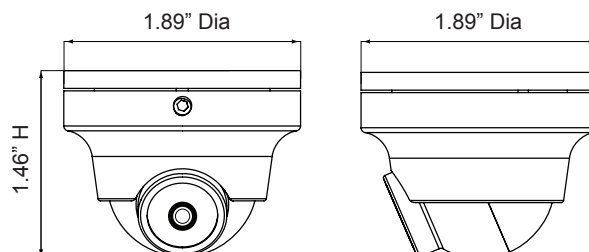


Shown at actual size

### Optional Accessories



**PSW5**  
12VDC  
Power Supply



**CM00TB**  
Ceiling tile mount,  
black



**CM00TW**  
Ceiling tile mount,  
white

Speco Technologies is constantly developing and improving products.

We reserve the right to modify product design and specifications without notice and without incurring any obligation.

Rev. 12/12/12

For more information contact Speco Technologies

200 New Highway, Amityville, NY 11701 • Toll Free: 1-800-645-5516 • Fax: 631-957-9142 or 631-957-3880  
www.specotech.com