



8P8C EZ Category 5e Module, 25 PK

PRODUCT SPECIFICATION

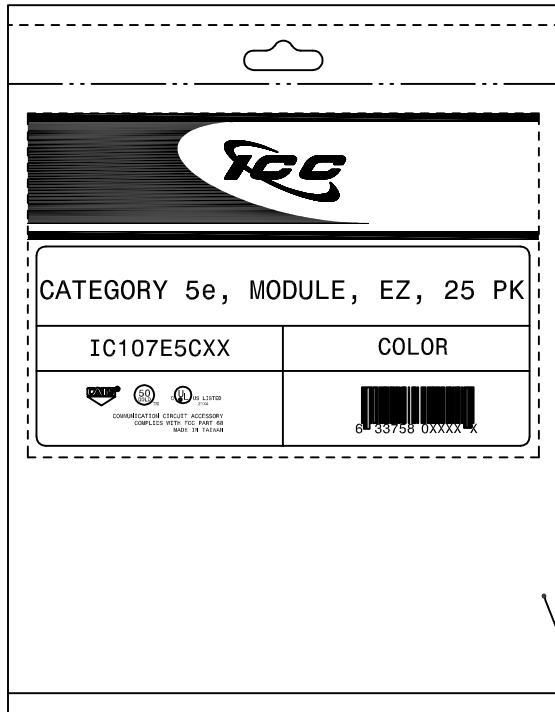

Package includes:

- A. 8P8C EZ Category 5e Module, 25 pcs
- B. Wire Cap, 25 pcs
- C. Packaging Bag, 1 pc

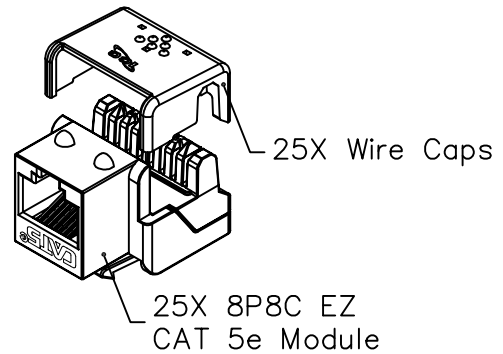

Packaging Bag

Features and Benefits:

- CAT 5e rated connectors provide excellent performance for data networks requiring maximum speed and bandwidth
- PCB technology provides maximum performance and superior signal quality
- Enhanced crosstalk cancellation reduces return loss and improves performance by rejecting noise and unwanted signals
- Exceeds ANSI/TIA-568-C requirements for permanent, channel link and component performances
- Engineered to provide 110 IDC termination reducing installation time
- Pair-to-Pair wiring for easy termination and best performance
- Includes an integrated TIA-568A/B color wiring diagram
- Backwards compatible to all lower rated category components
- Compatible with all IC107 faceplates, inserts, surface mount boxes, and blank patch panels
- Compatible with all IC108 furniture faceplates, bezels, and surface mount boxes
- Used with ICC Category 5e ICPCSJ series patch cords and 110 punch down tool ICACSPDT00
- Available in black, blue, ivory, orange, red, and white
- 25 modules packaged in packaging bag with 25 wire caps packaged in a separated bag and included in packaging bag
- UL 1863 compliant


MODULE, CAT 5E, EZ, 25 PK

ITEM NO.	IC107E5CXX
DWG NO.	PS107E5C00

REV.	F
PAGE NO.	1



CUSTOMER CARE / TECHNICAL SUPPORT * CSR@ICC.COM / 888-ASK-4-ICC (275-4422) * 2100 E. Valencia Dr, Suite D, Fullerton, CA 92831 * www.icc.com

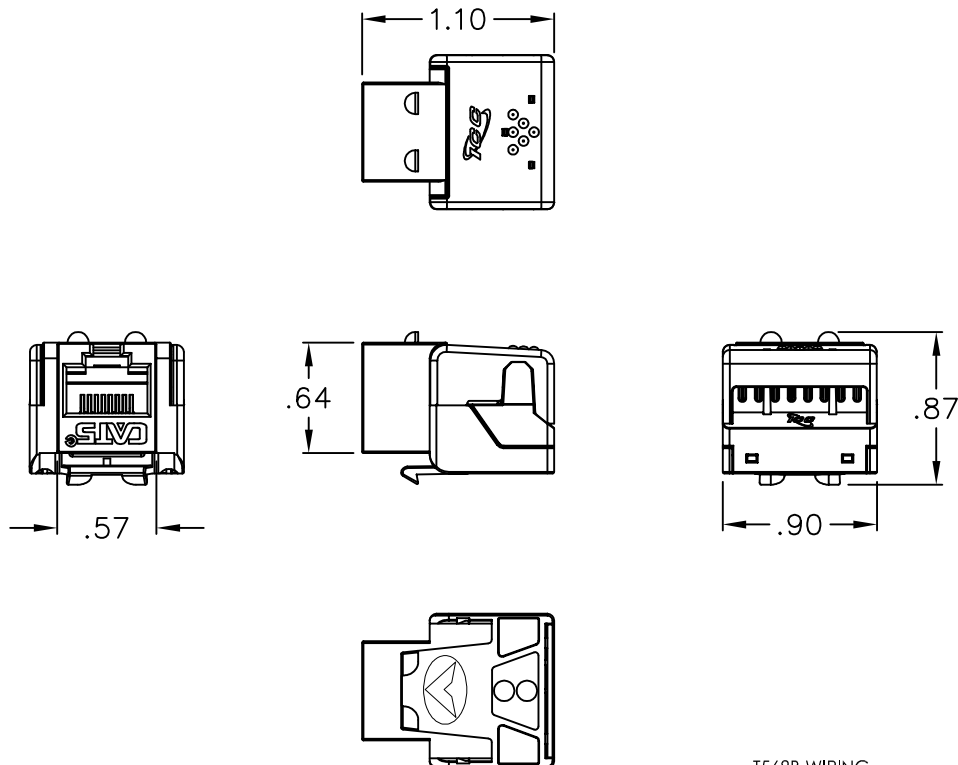

T568B WIRING	
1	WHITE/ORANGE
2	ORANGE
5	WHITE/BLUE
4	BLUE
3	WHITE/GREEN
6	GREEN
7	WHITE/BROWN
8	BROWN

T568A WIRING	
1	WHITE/GREEN
2	GREEN
5	WHITE/BLUE
4	BLUE
3	WHITE/ORANGE
6	ORANGE
7	WHITE/BROWN
8	BROWN

NOTE: UNLESS OTHERWISE SPECIFIED

1. CAT 5E MODULE:

A. ELECTRICAL:

- CURRENT RATING: 1.5 AMPS
- INSULATION RESISTANCE: 500 MOHMS MIN
- CONTACT RESISTANCE: 20 MOHMS MAX
- DC RESISTANCE: 0.1 OHM MAX
- TRANSMISSION PERFORMANCE EXCEEDS CATEGORY 5E CONNECTING HARDWARE REQUIREMENTS SPECIFIED IN ANSI/TIA-568-C.2 WHEN USED WITH COMPATIBLE HORIZONTAL CABLE


B. MECHANICAL:

- PLUG INSERTION LIFE: 750 CYCLES MIN
- PLUG & JACK CONTACT FORCE: 100 GRAMS MIN USING FCC APPROVED PLUG
- PLUG RETENTION FORCE: 50N (11 LBS) FOR 60s ± 5s
- TEMPERATURE: -40° TO 150° F (-40° TO 68° C)

C. PHYSICALS:

- HOUSING: HIGH IMPACT, FLAME RETARDANT PLASTIC, UL 94V-0
- JACK WIRING: PHOSPHOR BRONZE ALLOY PLATED WITH 50 µin OF GOLD OVER 70~100 µin OF 100% SN ALLOY
- CONNECTOR: INSULATION DISPLACEMENT CONNECTOR (IDC) ACCEPTS 22~24 AWG SOLID WIRE

D. COLORS: XX: BK-BLACK, BL-BLUE, IV-IVORY, OR-ORANGE, RD-RED, & WH-WHITE



CATEGORY 5e CONNECTING HARDWARE REQUIREMENTS										
FREQUENCY (MHz)	1.0	4.0	8.0	10.0	16.0	20.0	25.0	31.25	62.5	100
NEXT LOSS (db)	65.0	65.0	64.9	63.0	58.9	57.0	55.0	53.1	47.1	43.0
FEXT LOSS (db)	75.1	63.1	57.0	55.1	51.0	49.1	47.1	45.2	39.2	35.1
RETURN LOSS (db)	35.0	35.0	35.0	35.0	35.0	34.0	32.0	30.1	24.1	20.0
INSERTION LOSS(db)	0.10	0.10	0.10	0.10	0.20	0.20	0.20	0.20	0.30	0.40

UL US FILE NO. 125268

MODULE, CAT 5E, EZ, 25 PK

ITEM NO. IC107E5CXX

REV. F

DWG NO. PS107E5C00

PAGE NO. 2



CUSTOMER CARE / TECHNICAL SUPPORT * CSR@ICC.COM / 888-ASK-4-ICC (275-4422) * 2100 E. Valencia Dr, Suite D, Fullerton, CA 92831 * www.icc.com