


B10R-1640-120WI Medium Control Panel Enclosure

www.boschsecurity.com



BOSCH
Invented for life

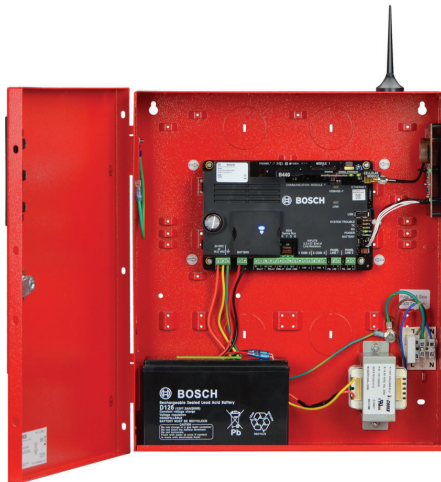

- ▶ Enclosed 16.5 VAC 40 VA transformer
- ▶ Easy to install standoff locations for mounting supporting modules
- ▶ Red matte finish for fire applications
- ▶ Punch outs for optional B46 External Annunciator (for B465 only)
- ▶ Additional slow-blow fuse included in fuse block

The B10R-1640-120WI Red Medium Enclosure with 16.5 VAC 40 VA Transformer houses the D1640-120WI wired-in transformer, and select Bosch control panels and modules. The enclosure is compatible with an optional enclosure tamper switch and optional lock and key set, and holds one 7 or 18 Ah batteries.

Parts included

Quantity	Component
1	B10R-1640-120WI enclosure
1	Hardware pack
1	Installation Guide (hardcopy)

Technical specifications

Properties

Dimensions	14 in x 12.5 in x 3 in (35.6 cm x 31.8 Cm x 7.6 cm)
Material	1.0 mm (20 gauge) cold-rolled steel
Color	Red

Environmental considerations

Temperature (operating)	0°C to +49°C (+32°F to +120°F)
Mounting considerations	Mount in dry indoor locations.

Power requirements

Voltage (operating)	120 VAC nominal to fuse block
Current (maximum)	< 0.5 A

Fuse	0.5 A slow 250 V 5x20 mm
Terminal wire size	2 mm to 0.65 mm (12 AWG to 22 AWG)

Compatibility

Devices	B465 Conettix Universal Dual Path Communicator B46 External Annunciator D101 Lock and Key Set ICP-EZTS Tamper Switch Set D110 Tamper Switch
---------	---

Ordering information

B10R-1640-120WI Medium Control Panel Enclosure
Red, steel enclosure with an attached with 16.5 VAC 40 VA transformer. Accepts an optional lock and tamper switch.

Order number **B10R-1640-120WI**

Accessories

D101 Lock and Key Set

Short-body lock set with one key supplied. Uses the D102 (#1358) replacement key.

Order number **D101**

ICP-EZTS Dual Tamper Switch

Combination tamper switch with a wire loop for additional tamper outputs.

Order number **ICP-EZTS**

D110 Tamper Switch

Screw-on tamper switch that fits all enclosures.

Shipped in packages of two.

Order number **D110**

Represented by:

North America:

Bosch Security Systems, Inc.
130 Perinton Parkway
Fairport, New York, 14450, USA
Phone: +1 800 289 0096
Fax: +1 585 223 9180
security.sales@us.bosch.com
www.boschsecurity.us

Europe, Middle East, Africa:

Bosch Security Systems B.V.
P.O. Box 80002
5617 BA Eindhoven, The Netherlands
Phone: + 31 40 2577 284
Fax: +31 40 2577 330
emea.securitysystems@bosch.com
www.boschsecurity.com

Asia-Pacific:

Robert Bosch (SEA) Pte Ltd, Security Systems
11 Bishan Street 21
Singapore 573943
Phone: +65 6571 2808
Fax: +65 6571 2699
apr.securitysystems@bosch.com
www.boschsecurity.asia

China:

Bosch (Shanghai) Security Systems Ltd.
203 Building, No. 333 Fuquan Road
North IBP
Changning District, Shanghai
200335 China
Phone +86 21 22181111
Fax: +86 21 22182398
www.boschsecurity.com.cn

Latin America and Caribbean:

Robert Bosch Ltda Security Systems Division
Via Anhanguera, Km 98
CEP 13065-900
Campinas, Sao Paulo, Brazil
Phone: +55 19 2103 2860
Fax: +55 19 2103 2862
latam.boschsecurity@bosch.com
www.boschsecurity.com