
5-Pair 110 Connecting Block, 100 Pk

PRODUCT SPECIFICATION

Package includes:

A. 5-Pair 110 Connecting Block, 100 pcs

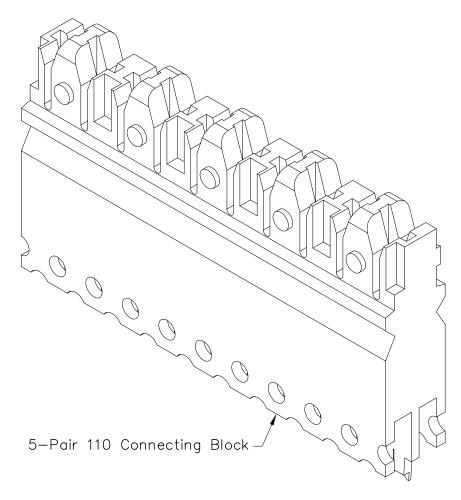


Features and Benefits:


- Designed for voice and data applications
- Performance exceeds Category 5e connecting hardware requirements specified in TIA/EIA-568-C.2
- Color coded and designed for repeated use
- Accepts 26~22 AWG solid or stranded wires
- Used with IC110 wiring blocks and IC110TC termination caps


110 CO	NNECTING BLOCK	K, 5-PAIR, 100 PK	\\ \cappa_c
ITEM NO.	IC110CB5PC	REV. A	Premium Products
DWG NO.	PS110CB5PC	PAGE NO. 1	Proven Perf



CUSTOMER CARE / TECHNICAL SUPPORT * CSR@ICC.COM / 888-ASK-4-ICC (275-4422) * 14700 Alondra Blvd., La Mirada, CA 90638 * www.icc.com



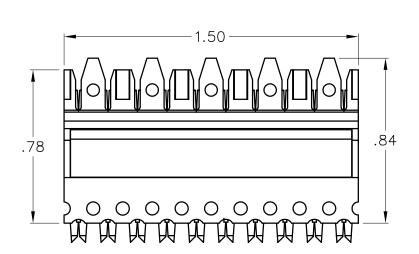



NOTE: UNLESS OTHERWISE SPECIFIED

1. MATERIAL:

A. CONTACT: COPPER ALLOY, 100 MICRO INCHES

BRIGHT SOLDER OVER 100 MICRO INCHES OF NICKEL UNDERPLATE

B. HOUSING: ABS, UL 94V-0

CAT 5e CONNECTING HARDWARE REQUIREMENTS										
FREQUENCY (MHz)	1.0	4.0	8.0	10.0	16.0	20.0	25.0	31.25	62.5	100
NEXT LOSS (db)	65.0	65.0	64.9	63.0	58.9	57.0	55.0	53.1	47.1	43.0
FEXT LOSS (db)	75.1	63.1	57.0	55.1	51.0	49.1	47.1	45.2	39.2	35.1
RETURN LOSS (db)	35.0	35.0	35.0	35.0	35.0	34.0	32.0	30.1	24.1	20.0
INSERTION LOSS(db)	0.10	0.10	0.10	0.10	0.20	0.20	0.20	0.20	0.30	0.40

110 CONNECTING BLOCK, 5-PAIR, 100 PK						
ITEM NO.	IC110CB5PC	REV. A				
DWG NO.	PS110CB5PC	PAGE NO 2				



CUSTOMER CARE / TECHNICAL SUPPORT * CSR@ICC.COM / 888-ASK-4-ICC (275-4422) * 14700 Alondra Blvd., La Mirada, CA 90638 * www.icc.com