# SC-ST 50/125µm OM2 MM Duplex Fiber Optic Jumper



## **Package Includes**

- A. SC-ST 50/125µm OM2 MM Duplex Fiber Jumper, 1 pc.
- B. Test Results Label, 1 pc.

### **Features and Benefits**


- Made from OFNR riser rated cables, exceeding industry requirements Used with ICC fiber optic products Available in 1, 2, 3, 5, 7, and 10 meters Dust Cap included

- Test results included



Page 1 of 2



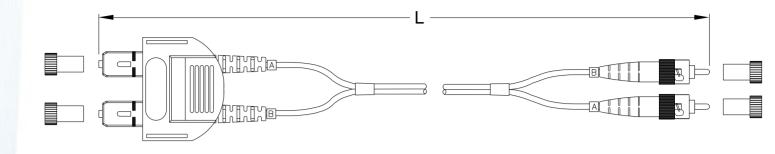

#### NOTE: UNLESS OTHERWISE SPECIFIED

#### 1. Cable:

A. Color: Orange

B. Fiber Counts: 2 Fiber Zipcord

C. Fiber Type: Multimode 50/125µm

D. Attenuation: 2.3/0.6 dB/km @ 850/1300 nm

E. Bandwidth: 950 MHz.km EMB @ 850 nm

F. Cable Data:

• Cable diameter: .079 in (2.0mm)

• Weight: 12 lbs./kft

Bend radius: 1.2" MIN

• Loading: 135 lbs. MAX

Impact cycle: 1500

#### 2. SC Connector:

A. Ferrule: Zirconia

B. Insertion Loss: 0.2 dB Typical, 0.3 dB MAX

#### 3. ST Connector:

A. Ferrule: Zirconia

B. Insertion Loss: 0.2 dB Typical, 0.3 dB MAX

#### 4. Compliance:

A. ANSI/TIA-568-C.3

5. Length: XX: 01, 02, 03, 05, 07, & 10

ITEM NUMBER	L (LENGTH)
ICFOJ9C701	1 METER ± 10 CM
ICFOJ9C702	2 METER ± 10 CM
ICFOJ9C703	3 METER ± 10 CM
ICFOJ9C705	5 METER ± 10 CM
ICFOJ9C707	7 METER ± 10 CM
ICFOJ9C710	10 METER ± 10 CM

Part No: ICFOJ9C7XX

Rev: A Page 2 of 2 I 888-ASK-4ICC icc.com csr@icc.com

