


# 12-Port Category 6 Vertical Patch Panel

## PRODUCT SPECIFICATION

### Package includes:

- A. 12-Port CAT 6 Vertical Patch Panel, 1 pc
- B. 89D Universal Mounting Bracket, 1 pc
- C. 6" Cable Tie, 3 pcs
- D. Installation Instructions, 1 sheet

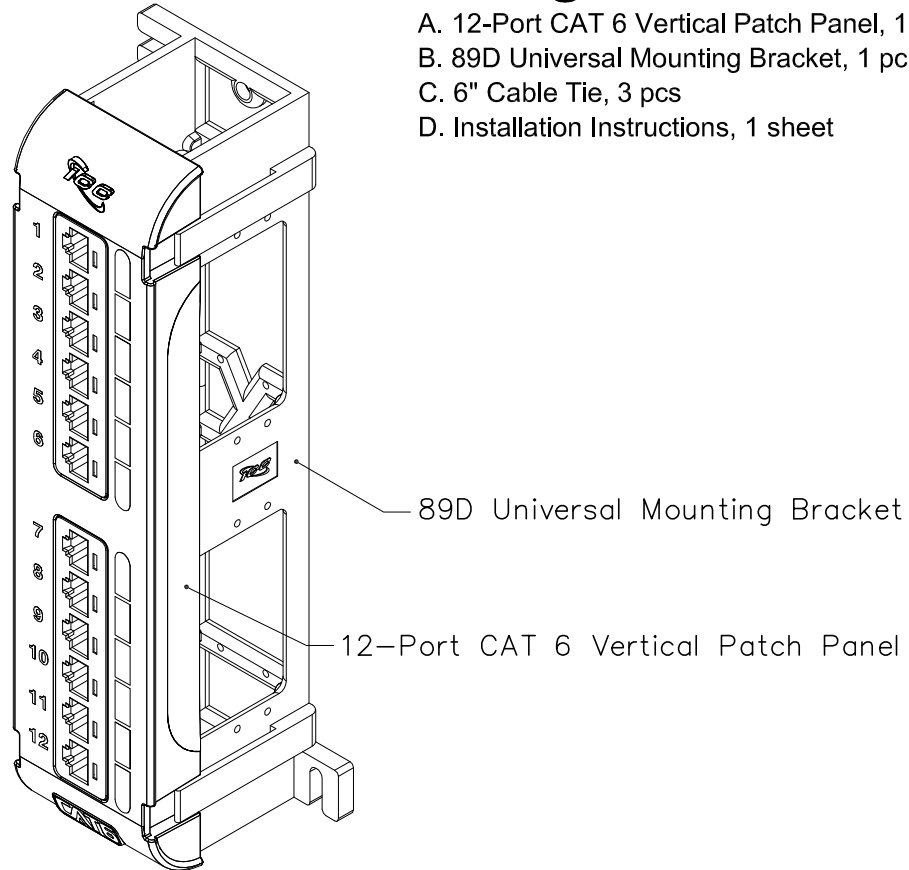

### Features and Benefits:

- Wall mounted CAT 6 component rated patch panel provides excellent performance for data networks requiring maximum speed and bandwidth.
- Enhanced crosstalk cancellation reduces return loss and improves performance by rejecting noise and unwanted signals.
- Exceeds ANSI/TIA/EIA-568-B.2-1 Category 6 connecting hardware requirements.
- Engineered to provide 110 IDC termination reducing installation time.
- Includes an integrated TIA-568A/B color wiring diagram.
- Backwards compatible to all lower rated category components.
- Used with ICPCSK CAT 6 patch cords and ICACSPDT00 110 punch down tool.
- Installation instructions.
- UL listed.


### PATCH PANEL, VERTICAL, CAT 6, 12-PORT

ITEM NO. ICMPP12V60  
 DWG NO. PSMPP12V60

REV. D  
 PAGE NO. 1



CUSTOMER CARE / TECHNICAL SUPPORT \* CSR@ICC.COM / 888-ASK-4-ICC (275-4422) \* 14700 Alondra Blvd., La Mirada, CA 90638 \* www.icc.com

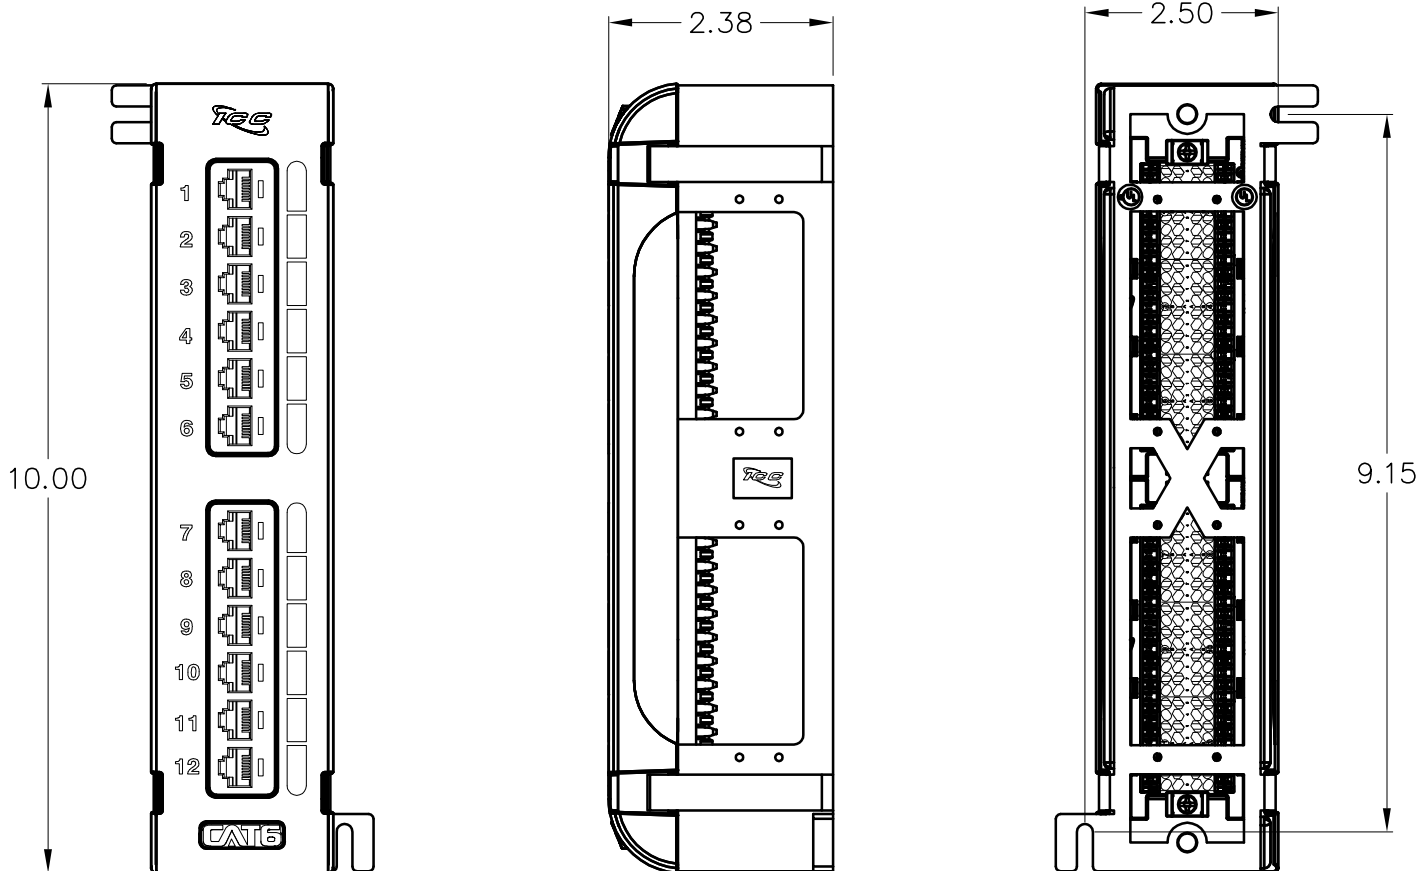

**NOTE: UNLESS OTHERWISE SPECIFIED**

**1. 12-PORT CAT 6 PATCH PANEL:**

**A. MATERIAL:**

- 12-PORT PATCH PANEL: ABS
- JACK HOUSING: HIGH IMPACT, FLAME RETARDANT PLASTIC, UL 94V-0
- SPRING WIRE: PHOSPHOR BRONZE
- 110 CONNECTOR: PHOSPHOR BRONZE ALLOY WITH 100 MICRO-INCH ALLOY
- GOLD RATING: 50 MICRO INCHES OF GOLD OVER 100 MICRO INCHES OF NICKEL

**B. SURFACE FINISH: BLACK POWDER COAT**

**C. MECHANICAL:**

- MATING FORCE: 100 GRAMS MIN/CONTACT
- TEMPERATURE RANGE: -40°~70°C
- PLUG RETENTION IN JACK: 50N (11 LBS SQ)
- IDC WIRE GAUGE: 22~24 AWG

**D. ELECTRICAL:**

- CURRENT RATING: 1.5 AMP DC
- CONTACT RESISTANCE: 2.5 MILOHMS MAX

RJ-45	110 CONNECTOR	UNIVERSAL WIRING	
		T568B	T568A
5	1	WHITE/BLUE	WHITE/BLUE
4	2	BLUE	BLUE
1	3	WHITE/ORANGE	WHITE/GREEN
2	4	ORANGE	GREEN
3	5	WHITE/GREEN	WHITE/ORANGE
6	6	GREEN	ORANGE
7	7	WHITE/BROWN	WHITE/BROWN
8	8	BROWN	BROWN

CATEGORY 6 CONNECTING HARDWARE REQUIREMENTS												
FREQUENCY (MHz)	1.0	4.0	8.0	10.0	16.0	20.0	25.0	31.25	62.5	100	200	250
NEXT LOSS (db)	75.0	75.0	75.0	74.0	69.9	68.0	66.0	64.1	58.1	54.0	48.0	46.0
FEXT LOSS (db)	75.0	71.1	65.0	63.1	59.0	57.1	55.1	53.2	47.2	43.1	37.1	35.1
RETURN LOSS (db)	30.0	30.0	30.0	30.0	30.0	30.0	30.0	30.0	28.1	24.0	18.0	16.0
INSERTION LOSS(db)	0.10	0.10	0.10	0.10	0.10	0.10	0.10	0.11	0.16	0.20	0.28	0.32

UL US FILE NO. 125268

**PATCH PANEL, VERTICAL, CAT 6, 12-PORT**

ITEM NO. ICMP12V60  
 DWG NO. PSMPP12V60

REV. D  
 PAGE NO. 2



CUSTOMER CARE / TECHNICAL SUPPORT \* CSR@ICC.COM / 888-ASK-4-ICC (275-4422) \* 14700 Alondra Blvd., La Mirada, CA 90638 \* www.icc.com